

***Klemsan***<sup>®</sup>



**AUTOMATION**  
CATALOGUE



# KLEMSAN Automation



*Klemsan offers you optimum solutions in all applications where energy is used, with its high performance, reliable, innovative automation products and wide product range with new products introduced every year.*

*Our products, designed with full integration of production and information technology, are suitable for use in many areas like lighting, wastewater treatment, renewable energy, transportation, industrial machinery, construction sector and much more.*

## Made in Turkey



With our continuous R & D and production investments, our product range is being enlarged and production capacity is being increased everyday. In addition to hardware and software, we also develop test apparatus and machine-specific software for our automation products. We are proud to present our products to the world in accordance with international standards and conformity.

---

**100%**  
**Customer**  
*Satisfaction*

---





Save your time  
and energy with  
fast response



Logistics and  
After Sales Service



Maximum  
reliability




Simple and effective  
functions suitable for  
your applications



Analysis of  
customer  
requirements




Project management with full  
expertise and newest  
technology



OHSAS 18001-2007  
ISO 9001  
ISO 50001  
ISO 14001 IRIS



**Time & Control**  
Management Solutions  09

**Protection**  
Management Solutions  33

**Alarm**  
Management Solutions  65

**Analog Signal**  
Management Solutions  89

**Switching**  
Management Solutions  117

**Communication**  
Management Solutions  149

**REMOTE I/O**  
Solutions  167

**Energy Monitoring**  
Solutions  172

**Reactive Power**  
Management Solutions  197



# Time & Control Management Solutions



*Timing is **everything***

## Defining a timer in simple terms

---

A timer is an automation device that either keeps track of how much time has been spent on doing something or that counts down a specified duration of time. After a predefined time has elapsed, the timer closes or opens its contact.

---

## In which fields are they most commonly used?

---

Starting  
Stopping  
Delaying  
Triggering


A timer can be used to **start** an action according to a predefined time or **to stop** an action over a period of time. It can also add **a delay to an action**. It allows to control applications with its **trigger input** as well.

---

## In which fields are they most commonly used?

---

- Industrial Machines
  - Lighting
  - Construction
  - HVAC systems
  - Food and agriculture
-




## Benefits and Advantages

- High accuracy and switching reliability,
- Sensitive timing range from 0.1sec to 10days,
- High mechanical endurance,
- Multifunctional operating modes,
- Trigger input,
- High level of electromagnetic compatibility (EMC) i.e. maximum immunity to interferences,
- A wide range of power supply from (24 to 300VAC/DC),
- Saves panel space with 17.5mm wide housing, compact and stylish design,
- Perfect to fit in modular enclosure,
- Protection against over voltage and reverse polarity,
- Self-Extinguishing plastic housing.

## Layout & Mounting


Klemsan electronic timers are suitable for plug-in assembly onto 35 mm standard DIN rails.

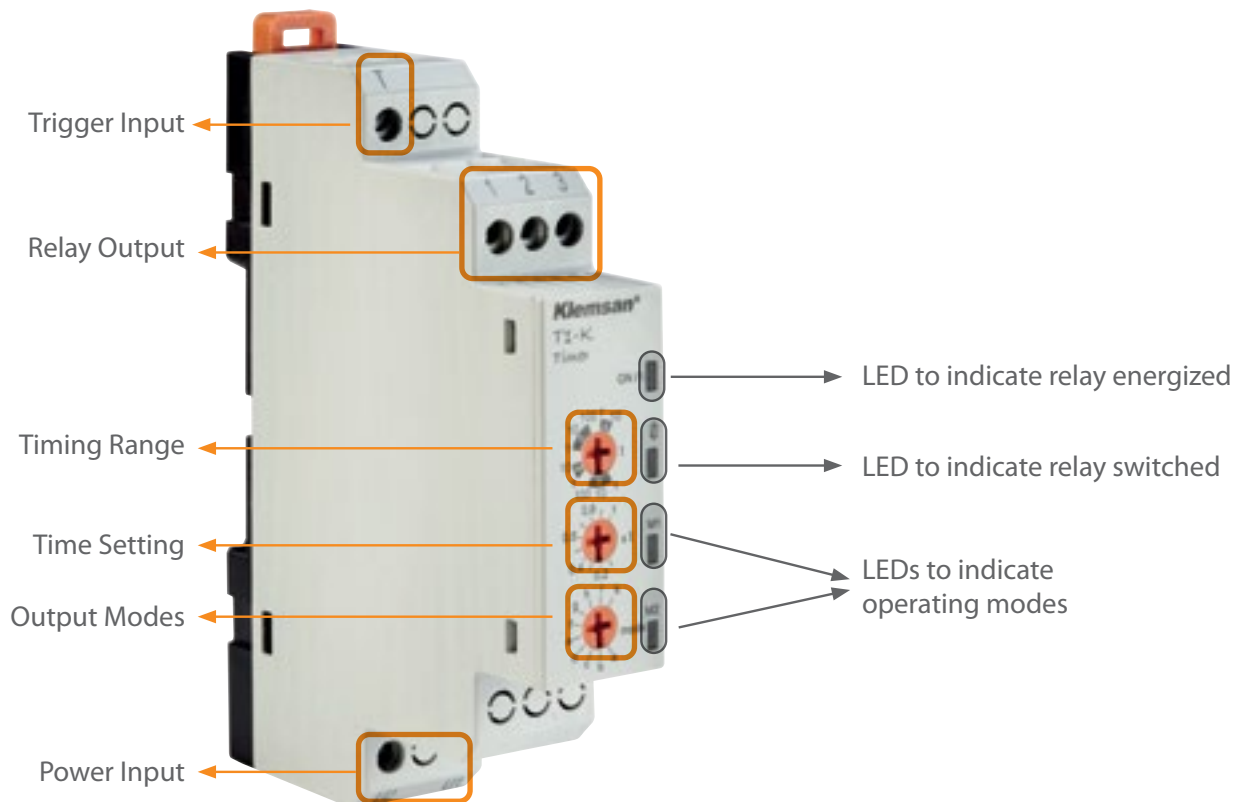

**T1-K Multifunctional Timer**



## Conveyor Control

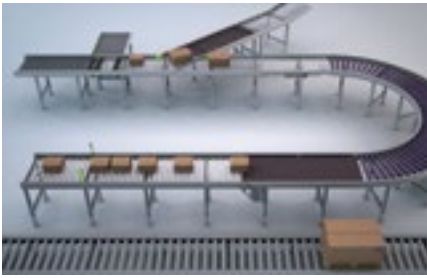

Managing the operation of a conveyor belt based on the time interval between products on the belt.



Timer  
*T1 series*

## Smart Lighting



Controlling flashing on lighted signs.



Timer  
*T1-Flash, T1-M4, T1-M5*

## Remote Machinery Control



Managing maintenance of the power supply in the event of a mains power failure, switching on an external backup power source for a given time.



Timer  
*T1 series*

## Vending Machines



Automatic management of vending machines.



Timer  
*T1-K*




Controls the direction of the motor's rotation.



**TIMER**  
*T1-LR*

## Star-Delta Starter



Successful run-up for industrial motors with star-delta relay.



**Motor Starter Relay**  
*SD1*

## Controlling Liquid Level in a Tank



It can be used to control the liquid level in a tank. Sensitivity resistance can be adjusted thus there is no need to change models to match different liquid types and concentrations.



**Liquid Level Controller**  
*LC3*

## Billboard and Street Lighting



Controlling billboards and street lights with accurate and precise time thanks to photocell relay.



**Photocell Relay**  
*PH1-20L*

## Packing Machine / System



Controlling heat sealing times on blister packs, packaging bags, etc.



**Timer**  
*T1-K, T1-M5, T1-M4*

## Meastro astronomical relay

MEASTRO is an astronomical time relay which calculates sunrise and sunset times for the given coordinates or city selections and turns the relay contacts on and off to control connected systems without any need of photocells or external sensors. Meastro can be used as a digital time relay as well.

## In which fields are they most commonly used?

Thanks to the MEASTRO **infrared** port and remote control; program, time, location and prayer information prepared by the computer is transferred within seconds.

MEASTRO **controls** devices connected to relay outputs according to user-programmed hours, sunrise and sunset times.

MEASTRO **saves energy** in street lighting, mosque lighting and air conditioning by its astronomical clock.

Infrared  
energy savings  
100 programming memories  
user interface software  
prayer times

It has a total of **100 programming memories** for 2 contacts.


With the **user interface software** you can program it much faster. You can also double your speed with

the control that provides infrared data transfer from the device to the controller or from the controller to the device bidirectionally.

It calculates **prayer times** according to the province-district or coordinate information you have set.

## In which fields are they most commonly used?

- Street lighting
- Site lighting
- University and college
- Mosque lighting and conditioning systems
- Irrigation in parks, gardens and farms
- Lighting in ATM's, store showcases, billboards



## Benefits and Advantages

- Fast programming with user interface program and infrared control
- 7 year battery reserve time
- 100 programming memories
- High Electromagnetic Compatibility (EMC) and maximum resistance to electromagnetic noise
- User-friendly menu structure
- Perfect fit with the modular panel
- High mechanical strength
- Self-extinguishing plastic outer structure

## Layout & Mounting

Klemsan astronomic timers are suitable for plug-in assembly onto 35 mm standard DIN rails.



**MEASTRO 321**

## Street Lighting



In open areas such as streets, parks and gardens, in closed areas such as universities, schools and buildings where lighting elements need to be turned on and turned off in certain periods, astronomical time relay is used without human power. Meastro, which calculates the change of the sunrise and sunset time over the next 100 years, saves energy. In addition, different programs according to the days of the week, the lighting system provides periodic control.



Astronomical Timer  
MEASTRO 221  
MEASTRO 321


## Mosque, Site Lighting and Air Conditioning



Control panels must be monitored carefully otherwise the effects of a power outage or voltage drop can be highly harmful for equipments.



Astronomical Timer  
MEASTRO 321



## ATM, Store Showcase, Billboards Lighting



MEASTRO is used in many areas like ATMs, showcases and billboards with the aim of saving energy.



*Astronomical Timer*

**MEASTRO 221**  
**MEASTRO 321**

## Irrigation in Parks, Gardens and Farms



The water pumps can be operated either once or multiple times a day or during a predefined time period before the sunrise.



*Astronomical Timer*

**MEASTRO 110**  
**MEASTRO 120**  
**MEASTRO 121**  
**MEASTRO 221**  
**MEASTRO 321**

## Digital Timer



MEASTRO also has models that are independent of the astronomical time, and can only be used as digital time relays on the days and times set by the user.



*Digital Timer*

**MEASTRO 110**  
**MEASTRO 210**

# Selection & Ordering Guide

## MEASTRO-R Infrared Controller




Order Number: 270 720



Type		MEASTRO110	MEASTRO120	MEASTRO121	MEASTRO221	MEASTRO321
<b>Definition</b>		Digital Timer	Digital Timer	Digital Timer	Astronomical Timer	Astronomical Timer
<b>Order Number</b>		270 700	270 701	270 702	270 703	270 704
<b>Casing Width(mm)</b>		36mm	36mm	36mm	36mm	36mm
<b>Connections</b>		Screw Terminal	Screw Terminal	Screw Terminal	Screw Terminal	Screw Terminal
<b>Mounting</b>		Rail Mount	Rail Mount	Rail Mount	Rail Mount	Rail Mount
<b>Functions</b>	Digital time clock	√	√	√	√	√
	Astronomical time clock	-	-	-	√	√
	Prayer program	-	-	-	-	√
	Infrared	-	-	√	√	√
	Programming with controller	-	-	√	√	√
<b>Display</b>	Type	LCD	LCD	LCD	LCD	LCD
	Dimensions	1.5	1.5	1.5	1.5	1.5
	Renewal time	0.5sec	0.5sec	0.5sec	0.5sec	0.5sec
<b>Number of Program</b>		100	100	100	100	100
<b>Infrared Distance</b>		550 mm	550 mm	550 mm	550 mm	550 mm
<b>Accuracy</b>		±1sec/day	±1sec/day	±1sec/day	±1sec/day	±1sec/day
<b>Battery Life</b>		7 years	7 years	7 years	7 years	7 years
<b>Type of Output</b>		Relay	Relay	Relay	Relay	Relay
<b>Relay Outputs</b>	Number of Contacts	1	2	2	2	2
	Type	1 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)
	Max. Ratings -AC	16A / 250VAC	16A / 250VAC	16A / 250VAC	16A / 250VAC	16A / 250VAC
	Max. Switching Power	4000 VA	4000 VA	4000 VA	4000 VA	4000 VA
	Mechanical Life Time	≥ 10 <sup>7</sup>	≥ 10 <sup>7</sup>	≥ 10 <sup>7</sup>	≥ 10 <sup>7</sup>	≥ 10 <sup>7</sup>
	Electrical Life Time	5x10 <sup>4</sup>	5x10 <sup>4</sup>	5x10 <sup>4</sup>	5x10 <sup>4</sup>	5x10 <sup>4</sup>
<b>Supply Voltage</b>	Supply Voltage	DC	-	-	-	-
		AC	165...265 V AC	165...265 V AC	165...265 V AC	165...265 V AC
	Supply Frequency	35-70Hz	35-70Hz	35-70Hz	35-70Hz	35-70Hz
<b>Permissible Ambient Temperature</b>	During Operation	-20°C..+70°C	-20°C..+70°C	-20°C..+70°C	-20°C..+70°C	-20°C..+70°C
	During Storage	-30°C..+80°C	-30°C..+80°C	-30°C..+80°C	-30°C..+80°C	-30°C..+80°C
<b>Relative Humidity</b>		Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
<b>Operating Frequency</b>		35-70Hz	35-70Hz	35-70Hz	35-70Hz	35-70Hz
<b>Degree of Protection</b>		IP20	IP20	IP20	IP20	IP20
<b>Power Consumption</b>	DC	-	-	-	-	-
	AC	<11VA	<11VA	<11VA	<11VA	<11VA





Type	MEASTRO110	MEASTRO120	MEASTRO121	MEASTRO221	MEASTRO321
<p>Schematics</p>					
<p>Dimensional Drawings</p>					

# Selection & Ordering Guide



Type		T1-30S	T1-60S	T1-60S2	T1-100S	T1-XS	T1-FLASH	T1-M4
<b>Timing Function</b>		Single-functional	Single-functional	Single-functional	Single-functional	Single-functional	Single-functional	Multifunctional
<b>Definiton</b>		On delay timer	On delay timer	2C/O On delay timer	On delay timer	On delay timer	Off flasher timer	Multimode timer
<b>Order Number</b>		270 363	270350	270 352	270359	270357	270351	270355
<b>Casing Width(mm)</b>		17,5	17.5	17,5	17.5	17.5	17.5	17.5
<b>Connections</b>		Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
<b>Functions</b>		ND	ND	ND	ND	XS	Foff	ND, FD, Fon, Foff
<b>Type of Output</b>		Relay	Relay	Relay	Relay	Relay	Relay	Relay
<b>Auxiliary contacts</b>	Type	1 C/O (SPDT)	1 C/O (SPDT)	2 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)
	Max ratings-AC (for NO side)	10A/250V; 1250 VA	5A/250V; 1250 VA	10A/250V; 1250 VA	5A/250V; 1250 VA	5A/250V; 1250 VA	5A/250V; 1250 VA	5A/250V; 1250 VA
	Max ratings-DC (for NO side)	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W
	Mechanical life time	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations
	Electrical life time operations (for NO side)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)
<b>Adjustment of Timing-1 &amp; Timing-2</b>		-	-	-	-	-	independent	independent
<b>Time Range</b>	Timing-1	1sec=>30sec	1sec =>60sec	1sec=>60sec	1sec =>100sec	1sec =>2559sec	0.1sec =>10days	1sec =>10days
	Timing-2	-	-	-	-	-	0.1sec =>10days	1sec =>10days
<b>Lux adjustment range</b>			-	-	-	-	-	-
<b>Sensitivity adjustment range</b>			-	-	-	-	-	-
<b>Supply Voltage</b>	DC	24-300 VDC	24-300 VDC	24-300 VDC	24VDC	24-300 VDC	24-300 VDC	24-300 VDC
	AC	24-300 VAC	24-300 VAC	24-300 VAC	24VAC or 180-265 VAC	24-300 VAC	24-300 VAC	24-300 VAC
<b>Supply Frequency</b>		35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz
<b>Trigger Input Voltage</b>		-	-	-	-	-	-	-
<b>Permissible ambient temperature</b>	During operation	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
	During storage	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
<b>Relative Humidity</b>		Max. 95% no condensation	Max. 95% no condensation	Max. 95% no condensation	Max. 95% no condensation	Max. 95% no condensation	Max. 95% no condensation	Max. 95% no condensation
<b>Recovery time</b>		Max. 100msec	Max. 100msec	Max. 100msec	Max. 100msec	Max. 100msec	Max. 100msec	Max. 100msec
<b>Degree of protection</b>		IP20	IP20	IP20	IP20	IP20	IP20	IP20




T1-M5	T1-K	T1-LR	SD1	SD1-24	PH1-20L	LC3	LC3-T
Multifunctional	Multifunctional	Single-functional	Single-functional	Single-functional	Single-functional	Single-functional	Single-functional
Multimode timer	Multimode timer with trigger input	Left-right timer	Star-delta timer	Star-delta timer	Photocell relay with an external photocell sensor	Liquid level controller	Liquid level controller
270353	270354	270356	270358	270362	270050	270001	270 002
17.5	17.5	17.5	17.5	17.5	17.5	36	36
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
ND, FD, NFD, Fon, Foff	a, b, c, d, e, f, g, h, i, k	LR	SD	SD	PHL	LC	LC
Relay	Relay	Two Relays	Two Relays	Relay	Relay	Relay	Relay
1 C/O (SPDT)	1 C/O (SPDT)	2 x C/O	2 x C/O	2 x C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)
5A/250V; 1250 VA	5A/250V; 1250 VA	5A/250V; 1250 VA	5A/250V; 1250 VA	10A/250V; 1250 VA	5A/250V; 1250 VA	5A/250V; 1250 VA	10A/250V; 1250 VA
5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W
≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations
5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>4</sup> (5A@30VDC)
dependent	-	independent	independent	independent	independent	-	-
0.1sec =>10days	0.1sec =>10days	0.1sec =>10days	1sec =>30sec	1sec =>30sec	1sec =>45sec	0.1sec =>1sec	-
0.1sec =>10days	-	0.1sec =>10days	20msec=>500msec	20msec=>500msec	20msec1sec=>45sec	-	-
-	-	-	-	-	1-20Lux	-	-
-	-	-	-	-	-	5-100kΩ	2.5 .. 50KΩ
24-300 VDC	24-300 VDC	24-300 VDC	-	24-300 VDC	24-300 VDC	-	-
24-300 VAC	24-300 VAC	24-300 VAC	150-500 VAC	24-300 VAC	24-300 VAC	150-500 VAC	185 .. 265V AC
35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	50-60Hz
-	24-300 VAC/DC	-	-	-	-	-	-
-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Max. 95% no condensation	Max. 95% no condensation	Max. 95% no condensation	Max. 95% no condensation	Max. 95% no condensation	Max. 95% no condensation	Max. 95% no condensation	Max. 95% no condensation
Max. 100msec	Max. 100msec	Max. 100msec	Max. 100msec	Max. 100msec	Max. 100msec	Max. 100msec	Max. 100msec
IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20

# Selection & Ordering Guide

Type		T1-30S	T1-60S	T1-60S2	T1-100S	T1-XS	T1-FLASH	T1-M4
Power consumption	DC	<2W	<1.25W	<2W	<1W	<1.25W	<1.25W	<1.25W
	AC	<3,5VA	<2.5VA	<3,5VA	<13VA	<2.5VA	<2.5VA	<2.5VA
Weight(gr)		66	57	66	57	62	60	60
Permissible mounting position		any	any	any	any	any	any	any
Accessories	Definiton	-	-	-	-	-	-	-
	Order Number	-	-	-	-	-	-	-
	Packaging unit	-	-	-	-	-	-	-
Schematics								
Dimensional Drawings								



T1-M5	T1-K	T1-LR	SD1	SD1-24	PH1-20L	LC3	LC3-T
<1.25W	<1.25W	<1.25W	<1.25W	<1.25W	<1.25W	-	-
<2.5VA	<2.5VA	<2.5VA	<2.5VA	<2.5VA	<2.5VA	<7VA	<7VA
60	66	70	70	70	63	82	82
any	any	any	any	any	any	any	any
-	-	-	-	-	-	Liquid Level probe for LC3	Liquid Level probe for LC3
-	-	-	-	-	-	280610	280610
-	-	-	-	-	-	1 pc.	1 pc.

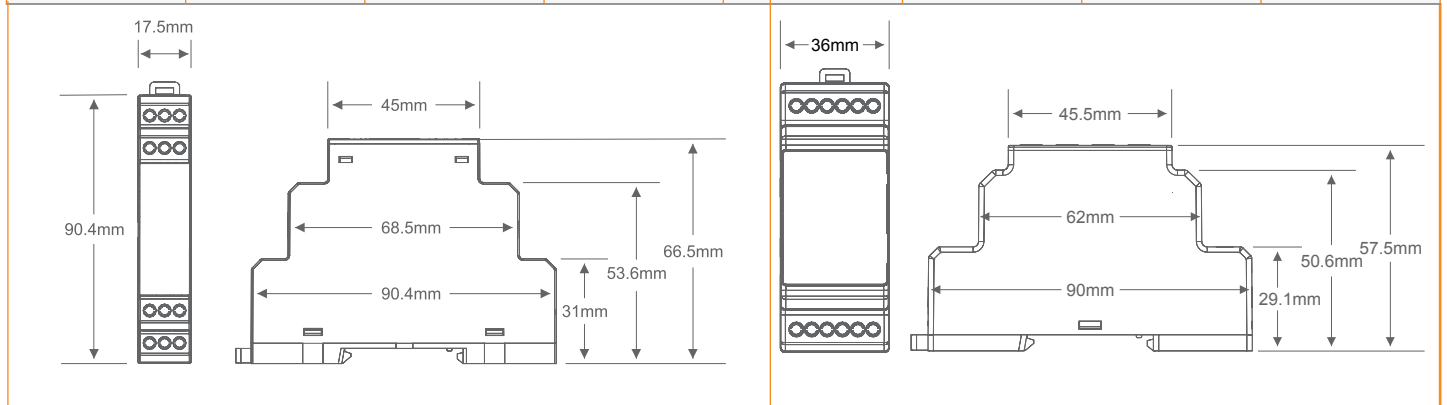





# Selection & Ordering Guide



Type		Z1-60S	Z1-100S	Z1-XS	Z1-FLASH
<b>Timing Function</b>		Single-functional	Single-functional	Single-functional	Single-functional
<b>Definiton</b>		On delay timer	On delay timer	On delay timer	Off flasher timer
<b>Order Number</b>		270 370	270 379	270 377	270 371
<b>Casing Width(mm)</b>		17,5	17,5	17,5	17,5
<b>Connections</b>		Screw terminal	Screw terminal	Screw terminal	Screw terminal
<b>Functions</b>		ND	ND	XS	Foff
<b>Type of Output</b>		Relay	Relay	Relay	Relay
<b>Auxiliary contacts</b>	Type	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)
	Max ratings-AC	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA
	Max ratings-DC	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W
	Mechanical life	≥ 10 <sup>7</sup>	≥ 10 <sup>7</sup>	≥ 10 <sup>7</sup>	≥ 10 <sup>7</sup>
	Electrical life	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)
<b>Adjustment of Timing-1 &amp; Timing-2</b>		-	-	-	independent
<b>Time Range</b>	Timing-1	1sec=>60sec	1sec=>100sec	1sec=>2559sec	0.1sec =>10days
	Timing-2	-	-	-	0.1sec =>10days
<b>Lux adjustment range</b>		-	-	-	-
<b>Sensitivity adjustment range</b>		-	-	-	-
<b>Supply Voltage</b>	DC	12VDC	24VDC	12VDC	12VDC
	AC	12VAC or 180..265V AC	24VAC or 180..265V AC	12VAC or 180..265V AC	12VAC or 180..265V AC
<b>Supply Frequency</b>		50-60Hz	50-60Hz	50-60Hz	50-60Hz
<b>Trigger Input Voltage</b>		-	-	-	-
<b>Permissible Ambient Temperature</b>	During Operation	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
	During Storage	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
<b>Relative Humidity</b>		Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
<b>Recovery time</b>		Max. 100msec	Max. 100msec	Max. 100msec	Max. 100msec
<b>Degree of protection</b>		IP20	IP20	IP20	IP20
<b>Power consumption</b>	DC	<1.25W	<1.25W	<1.25W	<1.25W
	AC	<2.5VA	<2.5VA	<2.5VA	<2.5VA
<b>Weight(gr)</b>		60	60	60	60





				
Z1-M4	Z1-M5	Z1-K	Z1-LR	ZD1
Multifunctional	Multifunctional	Multifunctional	Multifunctional	Single-functional
Multimode timer	Multimode timer	Multimode timer with trigger input	Left-right timer	Star-delta timer
270 375	270 373	270 374	270 376	270 378
17,5	17,5	17,5	17,5	17,5
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
ND,FD,Fon,Foff	ND,FD,NFD,Fon,Foff	a,b,c,d,e,f,g,h,i,k	LR	SD
Relay	Relay	Relay	Relay	Relay
1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	2 x C/O (SPDT)	2 x C/O (SPDT)
10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA
5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W
$\geq 10^7$	$\geq 10^7$	$\geq 10^7$	$\geq 10^7$	$\geq 10^7$
5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)
independent	independent	independent	independent	independent
0.1sec =>10days	0.1sec =>10days	0.1sec =>10days	0.1sec =>10days	1sec =>30sec
0.1sec =>10days	0.1sec =>10days	-	0.1sec =>10days	20msec=>500msec
-	-	-	-	-
-	-	-	-	-
12VDC	12VDC	12VDC	12VDC	12VDC
12VAC or 180..265V AC	12VAC or 180..265V AC	12VAC or 180..265V AC	12VAC or 180..265V AC	12VAC or 180..265V AC
50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
-	-	12VAC/DC veya 180..265V AC	-	-
-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
Max. 100msec	Max. 100msec	Max. 100msec	Max. 100msec	Max. 100msec
IP20	IP20	IP20	IP20	IP20
<1.25W	<1.25W	<1.25W	<1.25W	<1.25W
<2.5VA	<2.5VA	<2.5VA	<2.5VA	<2.5VA
60	60	60	60	60




# Selection & Ordering Guide

Type	Z1-60S	Z1-100S	Z1-XS	Z1-FLASH
Permissible mounting position	any	any	any	any
Schematics	<p>Auxiliary Output (1, 2, 3)</p> <p>Supply Voltage Option-1 (12 VDC)</p> <p>Supply Voltage Option-2 (180-265 VAC)</p>	<p>Auxiliary Output (1, 2, 3)</p> <p>Supply Voltage Option-1 (24 VDC)</p> <p>Supply Voltage Option-2 (180-265 VAC)</p>	<p>Auxiliary Output (1, 2, 3)</p> <p>Supply Voltage Option-1 (12 VDC)</p> <p>Supply Voltage Option-2 (180-265 VAC)</p>	<p>Auxiliary Output (1, 2, 3)</p> <p>Supply Voltage Option-1 (12 VDC)</p> <p>Supply Voltage Option-2 (180-265 VAC)</p>
Dimensional Drawings	<p>17.5mm</p> <p>90.4mm</p> <p>45mm</p> <p>68.5mm</p> <p>90.4mm</p> <p>31mm</p> <p>53.6mm</p> <p>66.5mm</p>			

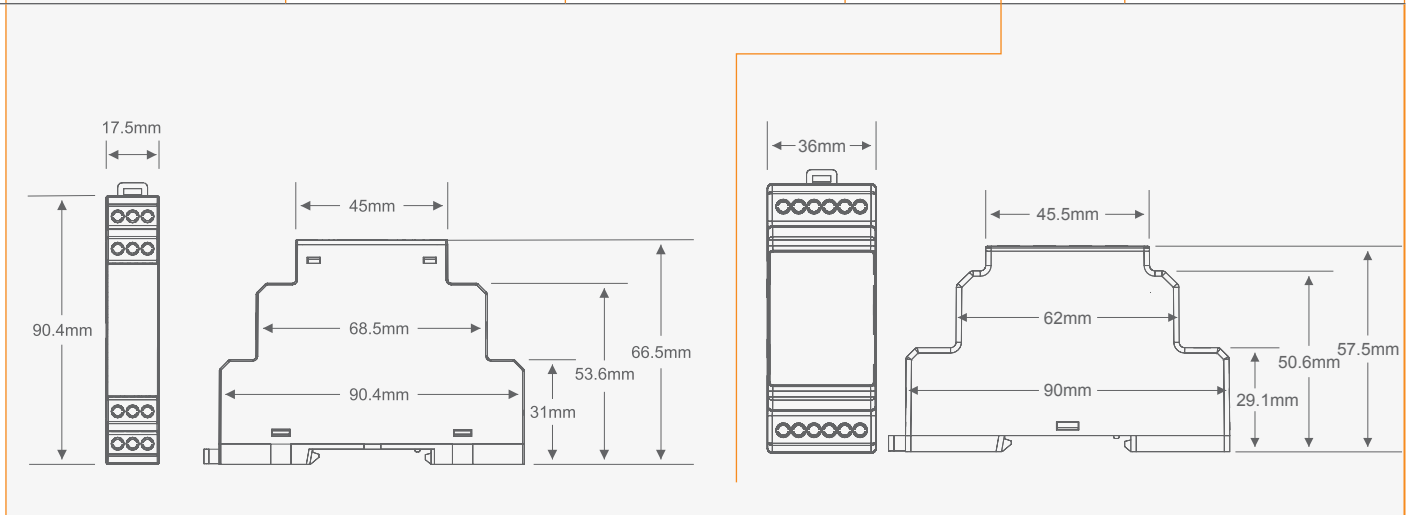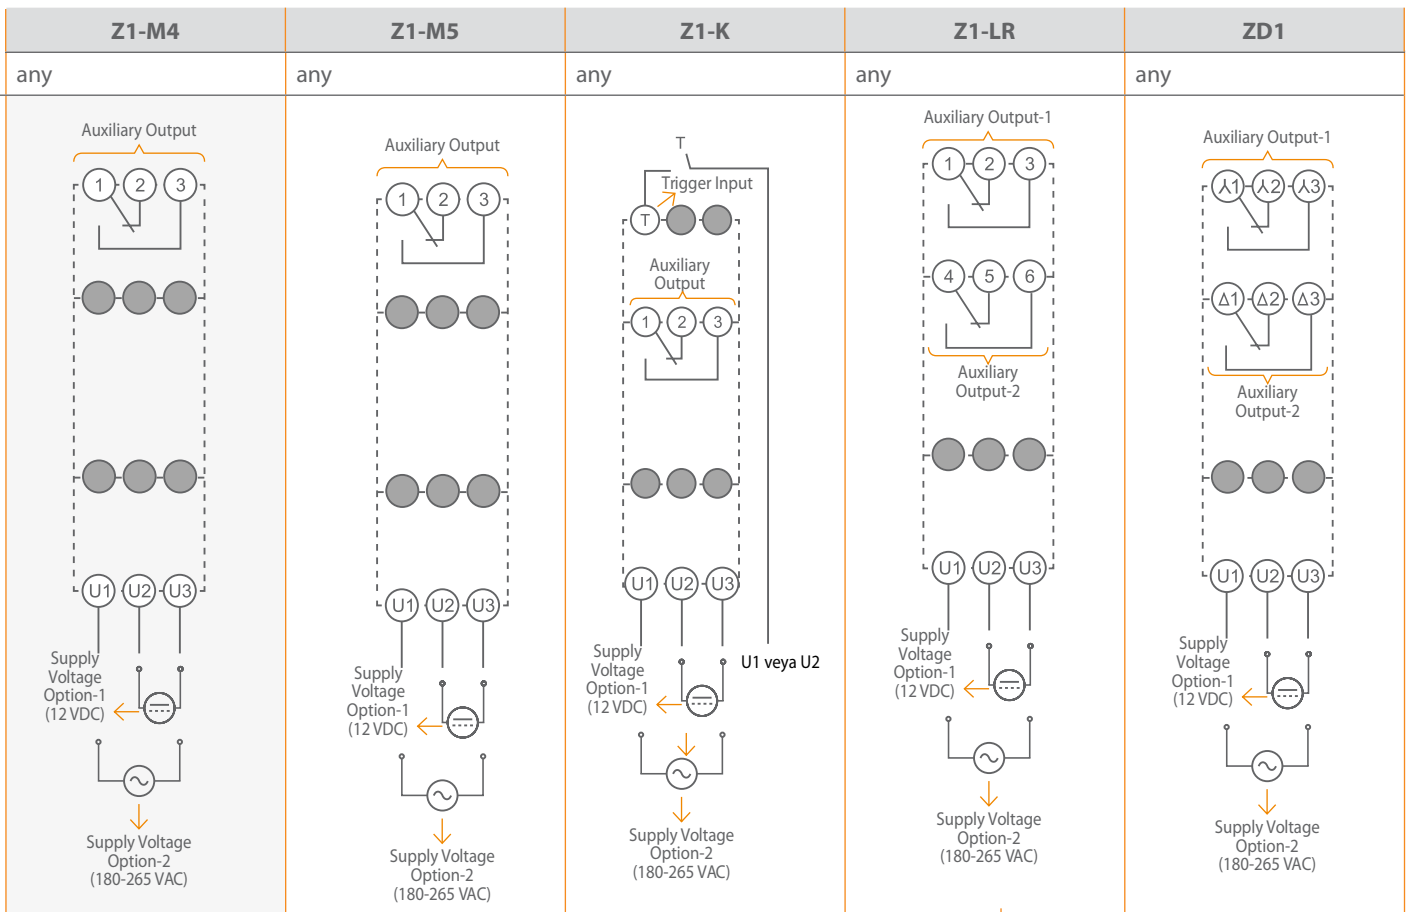


## a & ND functions / On delay operation

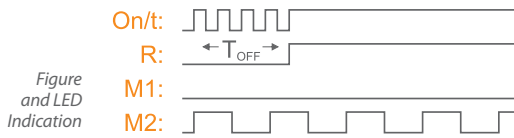


The output relay is initially de-energized and energized after an adjustable time delay,  $t_{off}$ .

## b & FD functions / Off delay operation

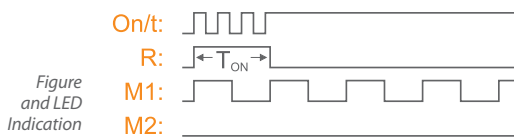


The output relay is initially energized and de-energized after an adjustable time delay,  $t_{on}$ .

## NFD function / On-Off delay operation

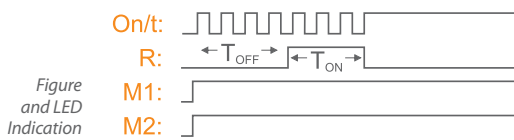


The output relay is initially de-energized and energized after an adjustable time delay,  $t_{off}$  and stays energized for an adjustable period,  $t_{on}$  and then de-energized.

## Fon function / On flasher operation

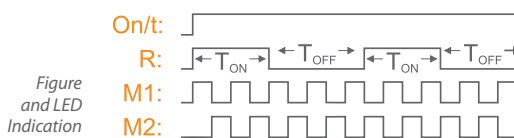


The output relay is initially energized and de-energized after an adjustable time delay,  $t_{on}$  and stays de-energized for an adjustable period,  $t_{off}$  and then energized. This loop is repeated until the device is powered off. "On/t" led flashes at  $F_{on}$  and  $F_{off}$  mode for "T1-M4" product.

## g and Foff functions / Off flasher operation

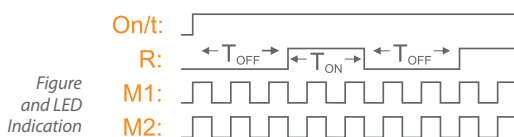

The output relay is initially de-energized and energized after an adjustable time delay,  $t_{off}$  and stays energized for an adjustable period,  $t_{on}$  and then de-energized. This loop is repeated until the device is powered off. "On/t" led flashes at  $F_{on}$  and  $F_{off}$  mode for "T1-M4" product.

## c function / On delay with control input

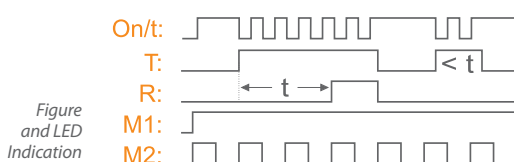

The output relay is initially de-energized. A contact closure on T contact triggers an adjustable time delay,  $t$ , which energizes the output relay when expired. The output relay stays energized as long as the T contact is active. Delay time,  $t$ , is cleared when the contact on T contact opens.



**d function / Off delay with control input**

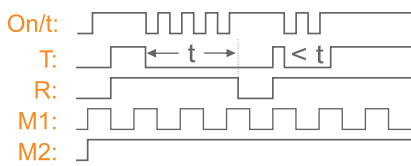


Figure and LED Indication

The output relay is initially de-energized and energized when a contact closure on T contact is detected. A contact triggers an adjustable time delay,  $t$ , which de-energizes the output relay when expired. Reclosure of the contact on T contact before the time delay is expired restarts time delay,  $t$ , and keeps the output relay energized.

**e function / Rising edge triggered off delay**

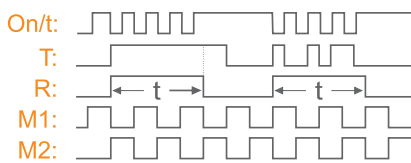


Figure and LED Indication

The output relay is initially de-energized. A contact closure on T contact both energizes the output relay and triggers an adjustable time delay,  $t$ , which de-energizes the output relay when expired. During the time delay, T contact is insensitive to state changes and becomes sensitive when time delay,  $t$ , expired.

**f function / Falling edge triggered off delay**

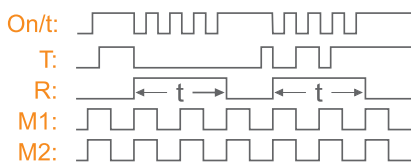


Figure and LED Indication

The output relay is initially de-energized. A state change of the T contact from closed to open both energizes the output relay and triggers an adjustable time delay,  $t$ , which de-energizes the output relay when expired. During the time delay, T contact is insensitive to state changes and becomes sensitive when time delay,  $t$ , expired.

**h function / On and off delay with control input**

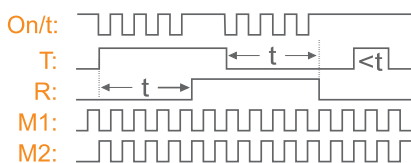


Figure and LED Indication

The output relay is initially de-energized. A contact closure on T contact triggers an adjustable time delay,  $t$ , which energizes the output relay when expired. Similarly contact release of T contact triggers the time delay,  $t$ , which de-energizes the output relay when expired. Delay time,  $t$ , is cleared when the contact state of T contact changes.

**i function / Adjustable pulse output with control input**

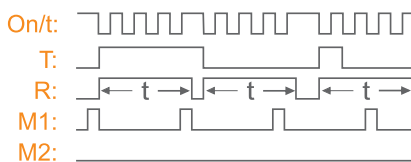


Figure and LED Indication

The output relay is initially de-energized. A state change on T contact both energizes the output relay and triggers an adjustable time delay,  $t$ , which de-energizes the output relay when expired. During the time delay, T contact is insensitive to state changes and becomes sensitive when time delay,  $t$ , expired.

**k function / On delay with memory**

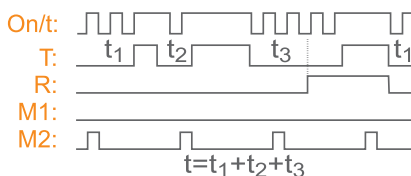


Figure and LED Indication

The output relay is initially de-energized. If T contact is open, adjustable time delay,  $t$ , counts down and output relay energizes when  $t$  is expired. Any contact closure on T contact pauses the count down process and the process continues when the contact release on T contact occurs. A contact release is needed to restart the cycle, after the output relay is energized.

## XS function / On delay adjustment for each second


Figure and LED Indication



T1-XS is an ON delay timer that allows a sensitive time setting from 1 to 2559 seconds with 1 second increments. The output relay is initially de-energized and energized after the time delay  $t$  is expired.

## SD function / Star-Delta operation


Figure and LED Indication



When the energy applied to device, star relay is energized until the end of the adjustable  $t_\lambda$  time. At the end of the adjusted delay time  $t_{\lambda-\Delta}$ , delta relay is energized until the device is powered off.

## LR function / Left-Right operation


Figure and LED Indication

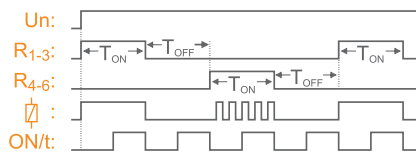


Initially first relay is energized. After the adjustable time delay  $t_{on}$ , relay is de-energized. Both relays are de-energized during the adjustable time delay  $t_{off}$ . At the end of  $t_{off}$  second relay energizes. Second relay stays in this position during  $t_{on}$ . When  $t_{on}$  finished both relays are de-energized. This cycle is repeated continuously.

## PHL function / Photocell operation

Figure and LED Indication

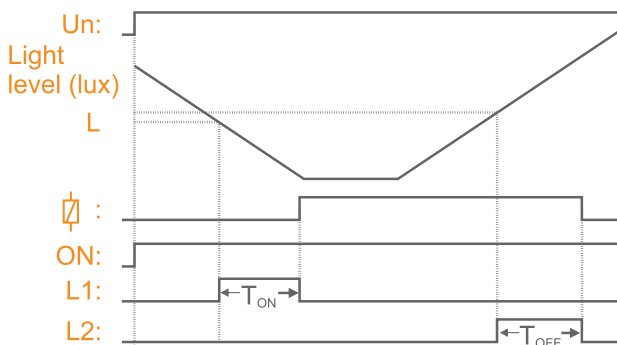

PH1-20L photocell relay measures the luminous intensity by means of a photocell sensor. On-off threshold value is adjusted in the range of 1-20 lux, via the front adjustment dial. The output relay is energized when the ambient light level is below the adjusted limit. On and off delays are adjustable between 1 and 45 seconds, via the front panel knobs. On delay is adjusted by  $t_{on}$  knob, and off delay is adjusted by  $t_{off}$  knob.



LC function / Liquid Level Operation



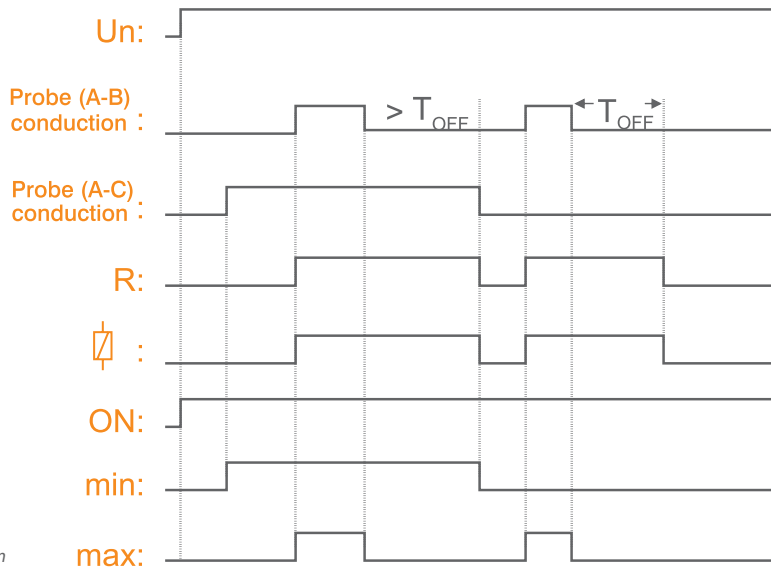


Figure and LED Indication



3 electrodes mode:

When the level of liquid in the tank reaches to electrode B, the output relay is activated and stays in this position even if the level drops below the electrode B level. The output relay is deactivated when the liquid level drops below the electrode A level. Re-activation occurs when the level reaches to the electrode B level.




2 electrodes mode:

For 2 electrodes mode of operation, A and B electrodes are used. When level of liquid in the tank reaches to electrode B, output relay is activated. When the liquid level drops below electrode B and continually stays there for the adjustable time delay (adjusted on the front panel knob); output relay will be de-energized.





# Protection Management Solutions

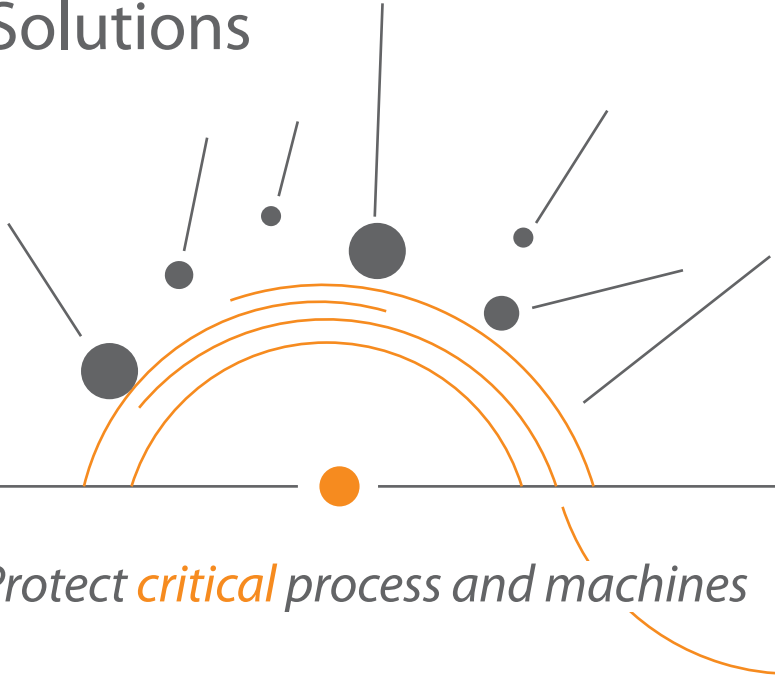

Protect *critical* process and machines

## **Defining** a protection relay **in** simple terms

---

A protection relay is an automation device that measures electrical values and detects electrical faults.

---

## **In which** fields are they most commonly used?

---

A protection relay measures electrical values such as current, voltage, frequency etc. in order to **protect** your machines.

It can stop your engine from overheating with external PTC **sensor**.

Electrical network which is connected to your machines is examined continuously. If a fault is **detected**, the machine is stopped immediately or with time **delay** by output contacts. After that, any malfunctions can be fixed. The rapid response to the failure prevents the delays in production and the costs that may arise due to the failure.

---

**Sensing** **Detection**  
**Delaying**  
**Protection**

## **In which** fields are they most commonly used?

---

- Industrial machines
  - Construction
  - Stone quarries
  - Food and agriculture
  - Water treatment system
  - Escalators & elevators
-




## Benefits and Advantages

- First class quality to fulfill all your monitoring needs
- Quick view of status with leds
- Easy configuration with knobs
- High level of electromagnetic compatibility (EMC) i.e. maximum immunity to interferences.
- Saves panel space with 17.5mm wide housing, compact and stylish design.
- Perfect to fit in modular enclosure
- Self-Extinguishing plastic housing
- No auxiliary supply needed
- Preventing overheating thanks to PTC input
- High mechanical endurance
- High accuracy and switching reliability

## Layout & Mounting

Klemsan protection relays are suitable for plug-in assembly onto 35mm standard DIN rails.

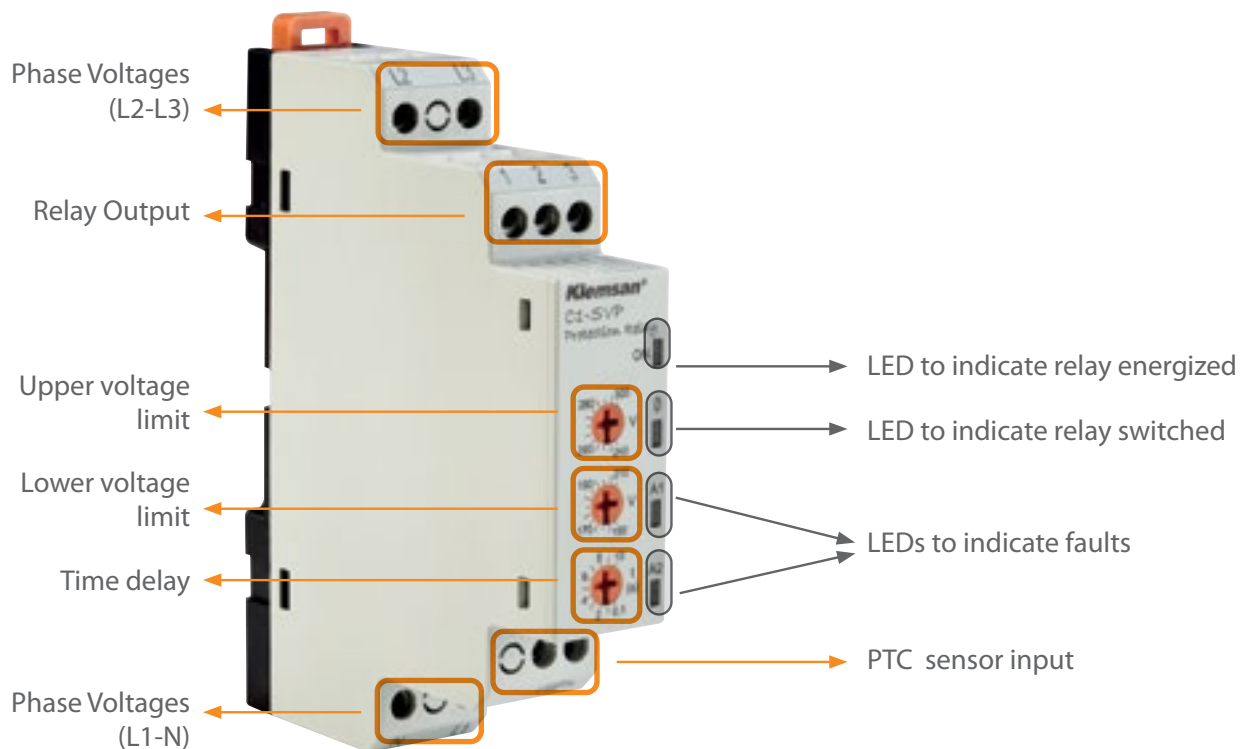

**C1-SVP Protection Relay**

## Overcurrent Protection with Smart MCB



**CURRENT PROTECTION**  
*CPR-16*



Detects a fault condition and interrupts current flow with adjustable time delay. After the fault is gone, unlike a circuit breaker, smart MCB turns its normal position automatically.

## Control Panel



**VOLTAGE PROTECTION**  
*V1-S, C1-SVP, ...*  
*G1-SA, G1-SAP, G1-A,*  
*DPR3*



Control panels must be monitored carefully otherwise the effects of a power failure or a voltage drop can be highly harmful for equipments.

## Escalators



**MOTOR PROTECTION**  
*C1D-SA, P1-SA, ...*  
*D-SA, G1D-SAL*  
*M1-SA, M1D-SA, DPR3*



Detection of unbalanced voltage on motors.

## Temperature Control of Motors



**OVERHEAT PROTECTION**  
*C1D-SVP, P1-SAP..*  
*M1-SAP, DPR3*



Preventing overheating with external PTC sensor.



## Conveyor Application



Detection of overcurrent when conveyor is jammed.



**CURRENT PROTECTION**  
CPR-16

## Generators



Frequency control for generators.



**FREQUENCY PROTECTION**  
F1, DPR3

## Machine Line



Providing phase loss, phase sequence and asymmetry protection for 3 phase application.



**MOTOR PROTECTION**  
P1D-SA, C1-SA ...  
M1D-S, M1D-SA, DPR3

## Cranes



Adjustments of over and under voltage limit in cranes to operate correctly.



**VOLTAGE PROTECTION**  
V1, V1D, C1-SVP,  
G1-SA...  
G1D-SA, DPR3

## Compressors



Detection of phase-loss and sequence in compressors to work correctly.



**MOTOR PROTECTION**  
P1-S, C1-SA, ...  
DPR3

## DPR3 Digital Protection Relay

---


DPR31xx series are digital protection and monitoring relays that designed for three-phase systems. DPR measures voltage, frequency and monitors these parameters below:

- Over voltage
- Under voltage
- Over frequency
- Under frequency
- Asymmetry
- Sequence
- Phase loss
- PTC error

## DPR31xx has many features;

---

- Undervoltage, overvoltage and frequency monitoring in three-phase AC systems 0...500 V
- Asymmetry, phase sequence, and phase loss monitoring
- Powered by external supply voltage
- Various alarms may be individually enabled/disabled and assigned to separat output contacts
- Start-up delay, response delay, delay on release
- Adjustable switching hysteresis
- RMS measurement (AC)
- Digital LCD display with real-time measuring
- Automatic preset function available when first connecting device
- Memory stores last 4 alarm value
- Non-volatile memory for settings
- Continuous self monitoring
- Internal test/reset button
- Two separate SPDT alarm relays
- Latching or non-latching operation
- Password protection for device setting
- Sealable transparent cover
- Two-module enclosure (36 mm)



## Layout & Mounting

Klemsan digital protection relays are suitable for plug-in assembly onto 35 mm standard DIN rails.




**DPR3111**

# Selection & Ordering Guide



Type			DPR3110	DPR3120	DPR3111	DPR3121	DPR3110E	DPR3120E
<b>Definition</b>			Digital Protection Relay	Digital Protection Relay	Digital Protection Relay	Digital Protection Relay	Digital Protection Relay	Digital Protection Relay
<b>Order Number</b>			270 600	270 601	270 602	270 603	270 604	270 605
<b>Casing Width(mm)</b>			36mm	36mm	36mm	36mm	36mm	36mm
<b>Connections</b>			Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
<b>Network</b>			3Ø with neutral	3Ø with neutral	3Ø without neutral	3Ø without neutral	3Ø with neutral	3Ø with neutral
<b>Monitoring Functions</b>	Phase Failure	Delay Time	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec
	Phase Sequence	Delay Time	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec
	Adjustable Unbalanced Protection	Range	0 - 30%	0 - 30%	0 - 30%	0 - 30%	0 - 30%	0 - 30%
		Hysteresis	0 - 30%	0 - 30%	0 - 30%	0 - 30%	0 - 30%	0 - 30%
		Delay Time	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec
	Adjustable Voltage Protection	Range	0 - 999 V	0 - 999 V	0 - 999 V	0 - 999 V	0 - 999 V	0 - 999 V
		Hysteresis	0 - 999 V	0 - 999 V	0 - 999 V	0 - 999 V	0 - 999 V	0 - 999 V
		Delay Time	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec
	Adjustable Frequency Protection	Range	0 - 999 V	0 - 999 V	0 - 999 V	0 - 999 V	0 - 999 V	0 - 999 V
		Hysteresis	0 - 999 V	0 - 999 V	0 - 999 V	0 - 999 V	0 - 999 V	0 - 999 V
Delay Time		0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec	0 - 999 sec	
PTC Protection	Threshold	1100Ω	-	1100Ω	-	1100Ω	-	
	Delay Time	0 - 999 sec	-	0 - 999 sec	-	0 - 999 sec	-	
<b>Type of Output</b>			Relay	Relay	Relay	Relay	Relay	Relay
<b>Auxiliary Contacts</b>	Number of Contacts		1	2	1	2	1	2
	Type		1 C/O (SPDT)	2 C/O (SPDT)	1 C/O (SPDT)	2 C/O (SPDT)	1 C/O (SPDT)	2 C/O (SPDT)
	Max Ratings-AC		10A / 250VAC	10A / 250VAC	10A / 250VAC	10A / 250VAC	10A / 250VAC	10A / 250VAC
	Max. Switching Power		1250VA	1250VA	1250VA	1250VA	1250VA	1250VA
	Mechanical Life Time		≥ 10 <sup>7</sup>	≥ 10 <sup>7</sup>	≥ 10 <sup>7</sup>	≥ 10 <sup>7</sup>	≥ 10 <sup>7</sup>	≥ 10 <sup>7</sup>
	Electrical Life Time		5x10 <sup>4</sup>	5x10 <sup>4</sup>	5x10 <sup>4</sup>	5x10 <sup>4</sup>	5x10 <sup>4</sup>	5x10 <sup>4</sup>
<b>Supply Voltage</b>	External Supply		-	-	-	-	Available	Available
	Supply Voltage	DC	-	-	-	-	-	-
		AC	85..300 V AC	85..300 V AC	85..300 V AC	85..300 V AC	85..300 V AC	85..300 V AC
Supply Frequency		35-70Hz	35-70Hz	35-70Hz	35-70Hz	35-70Hz	35-70Hz	
<b>Permissible Ambient Temperature</b>	During Operation		-20°C..+70°C	-20°C..+70°C	-20°C..+70°C	-20°C..+70°C	-20°C..+70°C	-20°C..+70°C
	During Storage		-30°C..+80°C	-30°C..+80°C	-30°C..+80°C	-30°C..+80°C	-30°C..+80°C	-30°C..+80°C
<b>Relative Humidity</b>			Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
<b>Operating Frequency</b>			35-70Hz	35-70Hz	35-70Hz	35-70Hz	35-70Hz	35-70Hz
<b>Degree of Protection</b>			IP20	IP20	IP20	IP20	IP20	IP20
<b>Power Consumption</b>	DC		-	-	-	-	-	-
	AC		<4VA	<4VA	<4VA	<4VA	<4VA	<4VA





Type	DPR3110	DPR3120	DPR3111	DPR3121	DPR3110E	DPR3120E
Schematics	<p>Voltage Measurement Inputs</p> <p>DPR3110</p> <p>Relay 1 PTC</p>	<p>Voltage Measurement Inputs</p> <p>DPR3120</p> <p>Relay 1 Relay 2</p>	<p>Voltage Measurement Inputs</p> <p>DPR3111</p> <p>Relay 1 Relay 2</p>	<p>Voltage Measurement Inputs</p> <p>DPR3121</p> <p>Relay 1 Relay 2</p>	<p>Power Supply Voltage Measurement Inputs</p> <p>DPR3110E</p> <p>Relay 1 PTC</p>	<p>Power Supply Voltage Measurement Inputs</p> <p>DPR3120E</p> <p>Relay 1 Relay 2</p>
	Dimensional Drawings	<p>← 36mm →</p> <p>45.5mm</p> <p>62mm</p> <p>90mm</p> <p>29.1mm</p> <p>50.6mm</p> <p>57.5mm</p>				



Type		F1	C1-SA	C1-SAP	C1-SVP	V1	V1-S	
<b>Definiton</b>		Frequency monitoring relay	Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay	
<b>Order Number</b>		270161	270156	270157	270158	270159	270160	
<b>Casing Width(mm)</b>		17.5	17.5	17.5	17.5	17.5	17.5	
<b>Connections</b>		Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	
<b>Network</b>		-	3Ø with neutral	3Ø with neutral	3Ø with neutral	3Ø with neutral	3Ø with neutral	
<b>Monitoring Functions</b>	Phase Failure	Fixed delay time	-	500msec	500msec	500msec	500msec	
	Phase Sequence	Fixed delay time	-	500msec	500msec	500msec	500msec	
	Adjustable Unbalanced Protection	Range	-	± (5% => 20%)	± (5% => 20%)	-	-	-
		Hysteresis	-	6,9VAC	6,9VAC	-	-	-
		Delay time	-	0.1=>10sec	0.1=>10sec	-	-	-
	Adjustable Voltage Protection	Upper limit	-	-	-	240=>300VAC (L-N)	240=>300VAC (L-N)	240=>300VAC (L-N)
		Lower limit	-	-	-	150=>210VAC (L-N)	150=>210VAC (L-N)	150=>210VAC (L-N)
		Hysteresis	-	-	-	6 VAC	6 VAC	6 VAC
		Delay time	-	-	-	0.1=>10sec for off delay operation	0.1=>10sec for off delay operation	0.1=>10sec for off delay operation
	Adjustable Current Protection	Upper limit	-	-	-	-	-	-
		Lower limit	-	-	-	-	-	-
		Hysteresis	-	-	-	-	-	-
		Delay time	-	-	-	-	-	-
	Adjustable Frequency Protection	Upper limit	42.5 => 65Hz	-	-	-	-	-
		Lower limit	40 => 62.5Hz	-	-	-	-	-
		Hysteresis	0.4Hz	-	-	-	-	-
		Delay time	1=>10sec	-	-	-	-	-
	Extremely High-Low Voltage Protection	Upper limit	-	310 VAC (L-N)	310 VAC (L-N)	310 VAC (L-N)	310 VAC (L-N)	310 VAC (L-N)
		Lower limit	-	140 VAC (L-N)	140 VAC (L-N)	140 VAC (L-N)	140 VAC (L-N)	140 VAC (L-N)
		Hysteresis	-	6 VAC	6 VAC	6 VAC	6 VAC	6 VAC
Delay time		-	100msec	100msec	100msec	100msec	100msec	
PTC Protection	Fixed delay time	-	-	2000msec	2000msec	-	-	
	Threshold	-	-	1100Ω	1100Ω	-	-	
<b>Response time for monitoring any function</b>		Max. 250msec	Max. 250msec	Max. 250msec	Max. 250msec	Max. 250msec	Max. 250msec	
<b>Type of Output</b>		Relay	Relay	Relay	Relay	Relay	Relay	
<b>Auxiliary contacts</b>	Type	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	
	Max ratings-AC (for NO side)	10A/250V; 1250VA	10A/250V; 1250VA	10A/250V; 1250VA	10A/250V; 1250VA	10A/250V; 1250VA	10A/250V; 1250VA	
	Max ratings-DC (for NO side)	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	
	Mechanical life time	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	





V1-M	V1-T	C1D-SA	C1D-SAP	C1D-SVP	V1D	V1D-S	CPR-16
VoltaTge monitoring relay	Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay	Current monitoring relay
270170	270162	270256	270257	270258	270259	270260	270270
17.5	17.5	17.5	17.5	17.5	17.5	17.5	36
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
1Ø with neutral	3Ø with neutral	3Ø without neutral	3Ø without neutral	3Ø without neutral	3Ø without neutral	3Ø without neutral	-
500msec	500msec	500msec	500msec	500msec	500msec	500msec	-
-	-	500msec	500msec	500msec	-	500msec	-
-	-	± (5% => 20%)	± (5% => 20%)	-	-	-	-
-	-	12 VAC	12 VAC	-	-	-	-
-	-	0.1=>10sec	0.1=>10sec	-	-	-	-
240=>300VAC (L-N)	240=>300VAC (L-N)	-	-	270=>370VAC (L-L)	270=>370VAC (L-L)	270=>370VAC (L-L)	-
150=>210VAC (L-N)	150=>210VAC (L-N)	-	-	400=>500VAC (L-L)	400=>500VAC (L-L)	400=>500VAC (L-L)	-
6 VAC	6 VAC	-	-	6 VAC	6 VAC	6 VAC	-
0.1=>10sec for off delay operation	0.1=>10sec for on delay operation & 0.1=>10sec for off delay operation	-	-	0.1=>10sec for off delay operation	0.1=>10sec for off delay operation	0.1=>10sec for off delay operation	-
-	-	-	-	-	-	-	1=>16AAC
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	5=>20% x Upper limit
-	-	-	-	-	-	-	0.1=>10sec
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
310 VAC (L-N)	310 VAC (L-N)	510 VAC (L-L)	510 VAC (L-L)	510 VAC (L-L)	510 VAC (L-L)	510 VAC (L-L)	-
140 VAC (L-N)	140 VAC (L-N)	240 VAC (L-L)	240 VAC (L-L)	240 VAC (L-L)	240 VAC (L-L)	240 VAC (L-L)	-
6 VAC	6 VAC	6 VAC	6 VAC	6 VAC	6 VAC	6 VAC	-
100msec	100msec	100msec	100msec	100msec	100msec	100msec	-
-	-	-	2000msec	2000msec	-	-	-
-	-	-	1100Ω	1100Ω	-	-	-
Max. 250msec	Max. 250msec	Max. 250msec	Max. 250msec	Max. 250msec	Max. 250msec	Max. 250msec	Max. 100msec
Relay	Relay	Relay	Relay	Relay	Relay	Relay	Relay
1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)
10A/250V; 1250VA	10A/250V; 1250VA	10A/250V; 1250VA	10A/250V; 1250VA	10A/250V; 1250VA	10A/250V; 1250VA	10A/250V; 1250VA	16A/250V; 4000VA
5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	-
≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations

Type		F1	C1-SA	C1-SAP	C1-SVP	V1	V1-S
<b>Auxiliary contacts</b>	Electrical life time operations (for NO side)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)
<b>Supply Voltage</b>	DC	-	-	-	-	-	-
	AC	85-320VAC from L1-N	85-320VAC from L1-N	85-320VAC from L1-N	85-320VAC from L1-N	85-320VAC from L1-N	85-320VAC from L1-N
<b>Supply Frequency</b>		35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz
<b>Control Input Voltage Range</b>		-	-	-	-	-	-
<b>Permissible ambient temperature</b>	During operation	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
	During storage	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
<b>Relative Humidity</b>		Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
<b>Operating frequency</b>		35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz
<b>Degree of protection</b>		IP20	IP20	IP20	IP20	IP20	IP20
<b>Power consumption</b>	DC	-	-	-	-	-	-
	AC	<3VA	<3VA	<3VA	<3VA	<3VA	<3VA
<b>Weight(gr)</b>		62	66	70	71	66	66
<b>Permissible mounting position</b>		any	any	any	any	any	any
<b>Schematics</b>							
<b>Dimensional Drawings</b>							





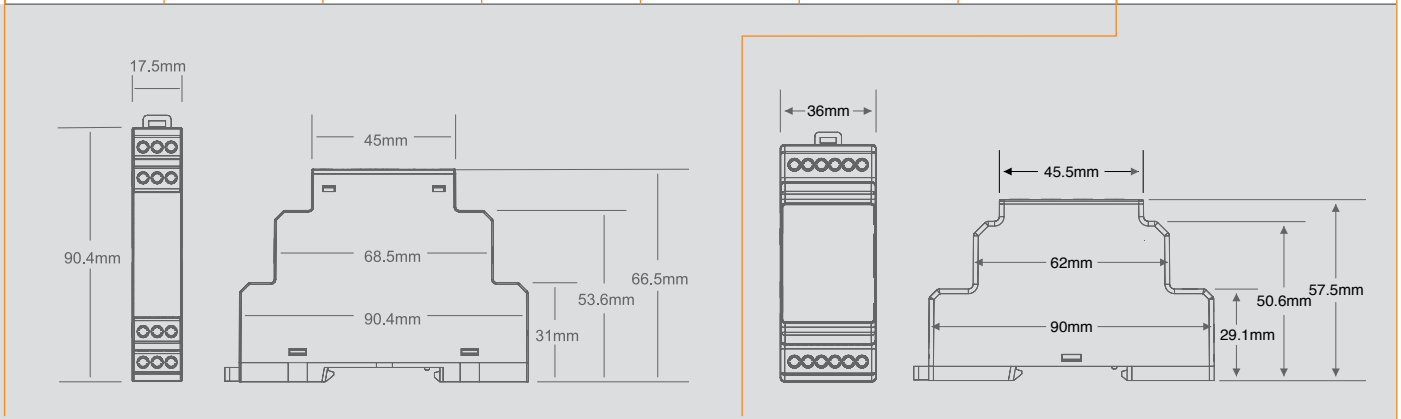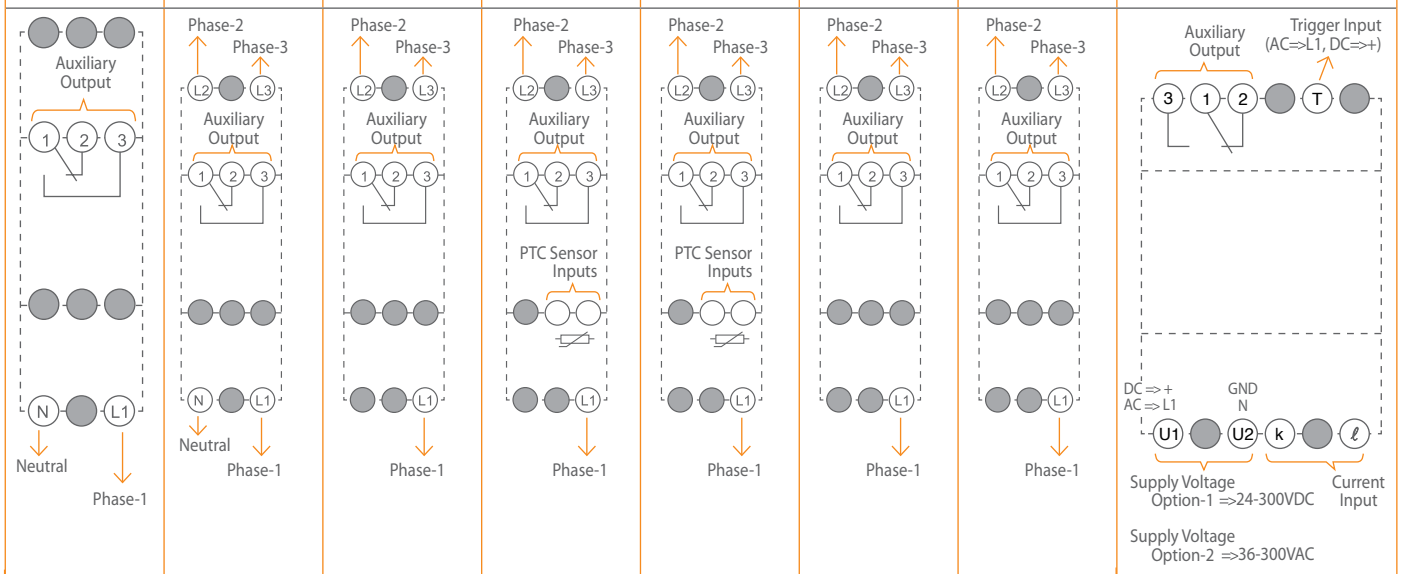




V1-M	V1-T	C1D-SA	C1D-SAP	C1D-SVP	V1D	V1D-S	CPR-16
5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	5x10 <sup>4</sup> (5A@250VAC) 1x10 <sup>5</sup> (5A@30VDC)	1x10 <sup>5</sup>
-	-	-	-	-	-	-	24-300 VDC
85-320VAC from L1-N	85-320VAC from L1-N	150-500VAC from L2-L3	150-500VAC from L2-L3	150-500VAC from L2-L3	150-500VAC from L2-L3	150-500VAC from L2-L3	36 -300VAC
35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz
-	-	-	-	-	-	-	Same with supply voltage
-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz
IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
-	-	-	-	-	-	-	<1W
<3VA	<3VA	<4VA	<4VA	<4VA	<4VA	<4VA	<3VA
62	66	70	75	75	70	70	95
any	any	any	any	any	any	any	any





Type		P1-A	P1-P	P1-S	P1-SP	P1-SA	
<b>Definiton</b>		Motor protection relay	Motor protection relay	Motor protection relay	Motor protection relay	Motor protection relay	
<b>Order Number</b>		270150	270151	270152	270153	270154	
<b>Casing Width(mm)</b>		17.5	17.5	17.5	17.5	17.5	
<b>Connections</b>		Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	
<b>Network</b>		3Ø with neutral	1Ø with neutral	3Ø with neutral	3Ø with neutral	3Ø with neutral	
<b>Monitoring Functions</b>	Phase Failure	Fixed delay time	500msec	-	500msec	500msec	
	Phase Sequence	Fixed delay time	-	-	500msec	500msec	
	Fixed Unbalanced Protection	Limit	± 20%	-	-	-	± 20%
		Hysteresis	3% x Un ≈ 6,9VAC	-	-	-	3% x Un ≈ 6,9VAC
		Delay time	500msec	-	-	-	500msec
	Extremely High-Low Voltage Protection	Upper limit	310 VAC (L-N)	-	310 VAC (L-N)	310 VAC (L-N)	310 VAC (L-N)
		Lower limit	140 VAC (L-N)	-	140 VAC (L-N)	140 VAC (L-N)	140 VAC (L-N)
		Hysteresis	6 VAC	-	6 VAC	6 VAC	6 VAC
		Delay time	100msec	-	100msec	100msec	100msec
	PTC Protection	Fixed delay time	-	2000msec	-	2000msec	-
Threshold		-	1100Ω	-	1100Ω	-	
<b>Response time for monitoring any function</b>		Max.250msec	Max.250msec	Max.250msec	Max.250msec	Max.250msec	
<b>Type of Output</b>		Relay	Relay	Relay	Relay	Relay	
<b>Auxiliary contacts</b>	Type	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	
	Max ratings-AC (for NO side)	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	
	Max ratings-DC (for NO side)	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	
	Mechanical life time	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	
	Electrical life time operations (for NO side)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	
<b>Supply Voltage</b>		85-320VAC from L1-N	85-320VAC from L1-N	85-320VAC from L1-N	85-320VAC from L1-N	85-320VAC from L1-N	
<b>Supply Frequency</b>		35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	
<b>Permissible ambient temperature</b>	During operation	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	
	During storage	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	
<b>Relative Humidity</b>		Max. 95% (no condensation)	Max. 95% (no condensation)	Max. 95% (no condensation)	Max. 95% (no condensation)	Max. 95% (no condensation)	
<b>Operating frequency</b>		35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	35-70 Hz	




						
P1-SAP	P1D-SA	P1D-SAP	P1-SU 230A	P1-SU 230C	P1-SU 115A	P1-SU 115C
Motor protection relay	Motor protection relay	Motor protection relay	Motor protection relay	Motor protection relay	Motor protection relay	Motor protection relay
270155	270254	270255	270400	270401	270402	270403
17.5	17.5	17.5	17.5	17.5	17.5	17.5
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
3Ø with neutral	3Ø without neutral	3Ø without neutral	3Ø with neutral	3Ø with neutral	3Ø with neutral	3Ø with neutral
500msec	500msec	500msec	<1sec	<1sec	<1sec	<1sec
500msec	-	500msec	<1sec	<1sec	<1sec	<1sec
± 20%	± 20%	± 20%	-40%	-40%	-40%	-40%
3% x Un ≈ 6,9VAC	3% x Un ≈ 12VAC	3% x Un ≈ 12VAC	3% x Un ≈ 12VAC	3% x Un ≈ 12VAC	3% x Un ≈ 12VAC	3% x Un ≈ 12VAC
500msec	500msec	500msec	<1sec	<1sec	<1sec	<1sec
310 VAC (L-N)	510 VAC (L-L)	510 VAC (L-L)	-	-	-	-
140 VAC (L-N)	240 VAC (L-L)	240 VAC (L-L)	-	-	-	-
6 VAC	6 VAC	6 VAC	-	-	-	-
100msec	100msec	100msec	-	-	-	-
2000msec	-	2000msec	-	-	-	-
1100Ω	-	1100Ω	-	-	-	-
Max.250msec	Max.250msec	Max.250msec	Max.250msec	Max.250msec	Max.250msec	Max.250msec
Relay	Relay	Relay	Relay	Relay	Relay	Relay
1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 NO (SPST)	1 C/O (SPDT)	1 NO (SPST)	1 C/O (SPDT)
10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA
5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W
≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations
5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)
85-320VAC from L1-N	150-500VAC from L2-L3	150-500VAC from L2-L3	180-265VAC from L3-N	180-265VAC from L3-N	90-150VAC from L3-N	90-150VAC from L3-N
35-70 Hz	35-70 Hz	35-70 Hz	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz
-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Max. 95% (no condensation)	Max. 95% (no condensation)	Max. 95% (no condensation)	Max. 95% (no condensation)	Max. 95% (no condensation)	Max. 95% (no condensation)	Max. 95% (no condensation)
35-70 Hz	35-70 Hz	35-70 Hz	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz

Type		P1-A	P1-P	P1-S	P1-SP	P1-SA
Degree of protection		IP20	IP20	IP20	IP20	IP20
Power consumption	DC	-	-	-	-	-
	AC	<3VA	<3VA	<3VA	<3VA	<3VA
Permissible mounting position		any	any	any	any	any
Weight(gr)		66	65	65	69	65
Schematics						
Dimensional Drawings						






P1-SAP	P1D-SA	P1D-SAP	P1-SU 230A	P1-SU 230C	P1-SU 115A	P1-SU 115C
IP20	IP20	IP20	IP20	IP20	IP20	IP20
-	-	-	-	-	-	-
<3VA	<4VA	<4VA	<13VA	<13VA	<4.5VA	<4.5VA
any	any	any	any	any	any	any
69	70	74	59	59	59	59

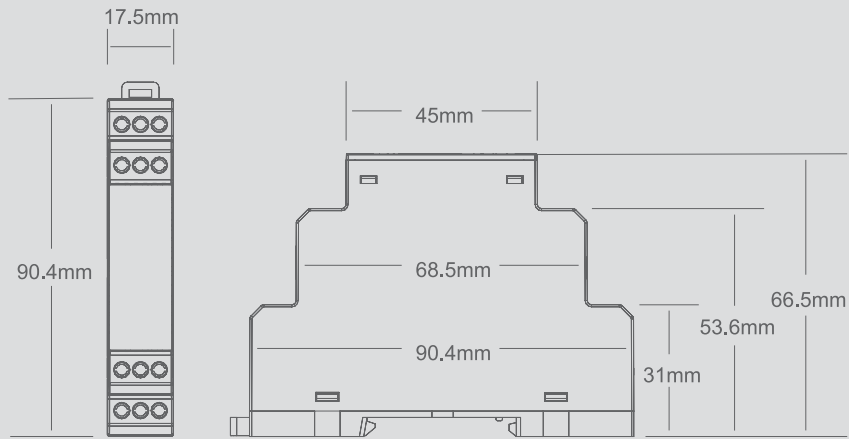


## Phase Failure / Off delay operation

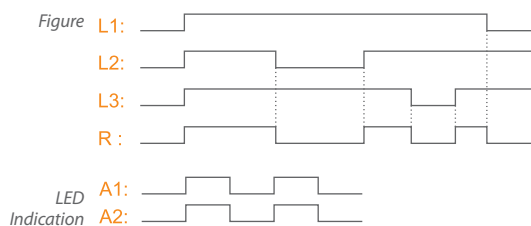

If a phase failure occurs the output relay de-energizes in 500msec.

The fault is indicated by flashing LED A1 and LED A2 simultaneously. The output relay re-energizes automatically as soon as the voltage returns to the tolerance range.


## Phase Sequence Error / Off delay operation

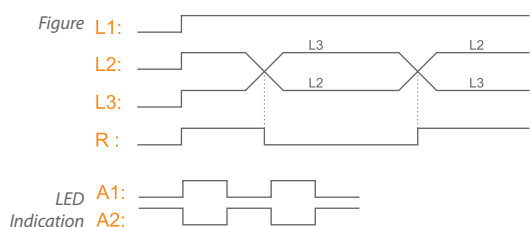

If a phase sequence error occurs the output relay de-energizes in 500msec.

The fault is displayed by alternated flashing of the LEDs A1 and A2. The output relay re-energizes automatically as soon as the phase sequence is correct again.


## Adjustable Unbalance Protection / Off delay operation

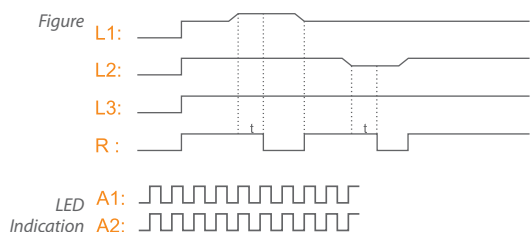

If the voltage to be monitored exceeds or falls below the set phase unbalance threshold percentage ( $\geq 20\%$ ), the output relay de-energizes after time delay (0.1-10s). The fault is indicated by flashing LED A1 and LED A2 quickly and simultaneously.

As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of  $3\% \times U_n$  the output relay re-energizes automatically.

## Fixed Unbalance Protection / Off delay operation


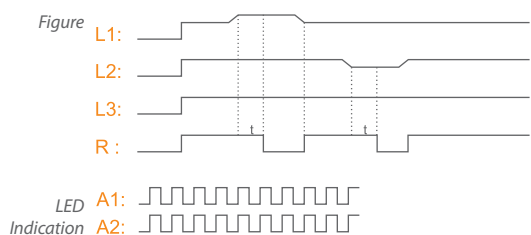


If the voltage to be monitored exceeds or falls below the set phase unbalance threshold percentage ( $\geq 20\%$ ), the output relay de-energizes after time delay (2sec). The fault is indicated by flashing LED A1 and LED A2 quickly and simultaneously.

As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of  $3\% \times U_n$  the output relay re-energizes automatically.





Adjustable Voltage Protection / Off delay operation

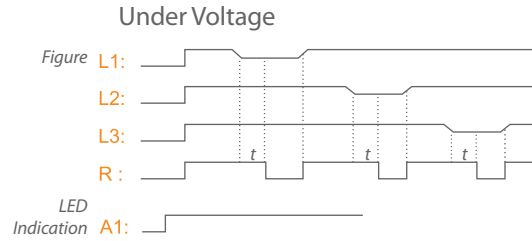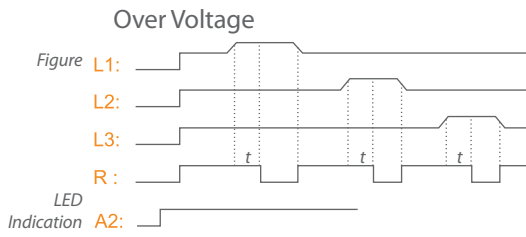

If the voltage to be monitored exceeds or falls below adjusted high limit or low limit value, the output relay de-energizes after time delay(0.1-10s). The fault type is indicated by LEDs A1 or A2 with constant light. As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 6VAC, the output relay re-energizes automatically.


Adjustable Voltage Protection / On-Off delay operation (Available only for V1-T)

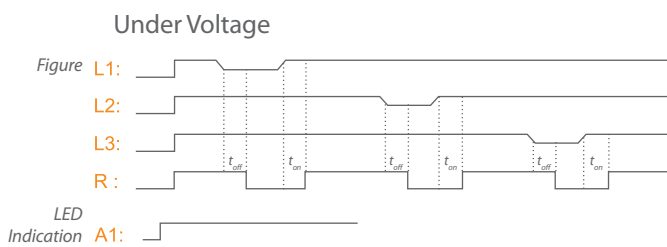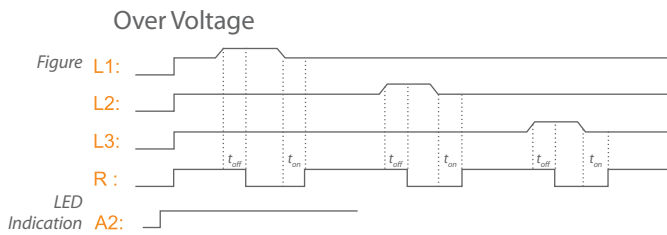

If the voltage to be monitored exceeds or falls below adjusted high limit or low limit value, the output relay de-energizes after  $t_{off}$  time delay(0.1-10s). The fault type is indicated by LEDs A1 or A2 with constant light. As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 6VAC, the output relay re-energizes after  $t_{on}$  time delay(0.1-10s).

## Adjustable Current Protection / On delay operation


Figure & LED Indication

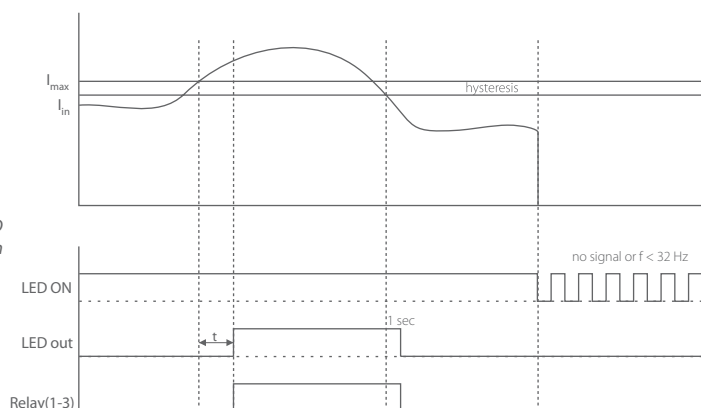

### AUTOMATIC MODE

If the current to be monitored exceeds adjusted high limit value, the output relay de-energizes after time delay(0.1-10s). As soon as the current returns to the tolerance range, taking into account adjusted hysteresis (5-20%) and 1 second safety time, the output relay re-energizes automatically.

Figure & LED Indication

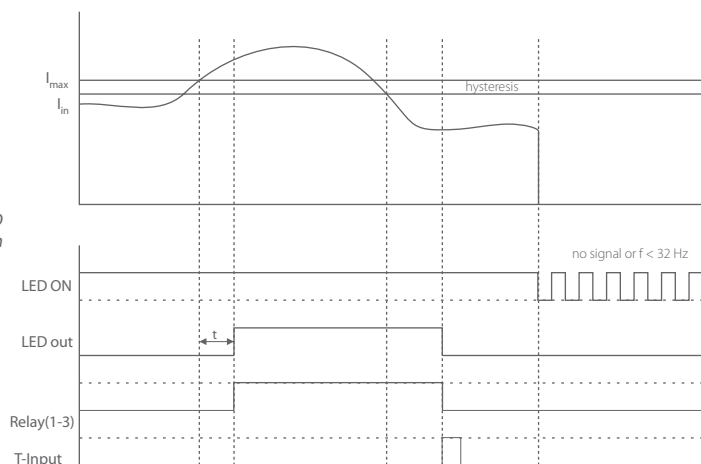


### MANUAL MODE

If the current to be monitored exceeds adjusted high limit value, the output relay de-energizes after time delay(0.1-10s). After the current returns to the tolerance range, taking into account adjusted hysteresis (5-20%) and 1 second safety time, the output relay waits till trigger input is applied. After that it re-energizes automatically.

## Adjustable Frequency Protection / Off delay operation

### Over Frequency

Figure



LED Indication



### Under Frequency

Figure



LED Indication




If the frequency to be monitored exceeds or falls below adjusted high limit or low limit value, the output relays de-energizes after time delay(1-10s). The fault type is indicated by LEDs A1 or A2 with constant light. As soon as the frequency returns to the tolerance range, taking into account a fixed hysteresis of 0.4kHz, the output relay re-energizes automatically.



Extremely High-Low Voltage Protection / Off delay operation

Over Over Voltage

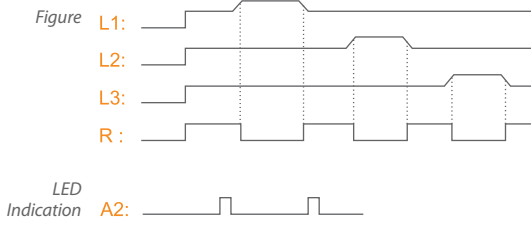


If the voltage to be monitored exceeds 310VAC for star connection device or 510VAC for delta connection device, output relay de-energizes immediately.


If the voltage to be monitored falls below 140VAC for star connection device or 240VAC for delta connection device, output relay de-energizes immediately.

The fault type is indicated by LEDs A1 or A2 with blinking. As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 6VAC, the output relay re-energizes automatically.

Under Under Voltage

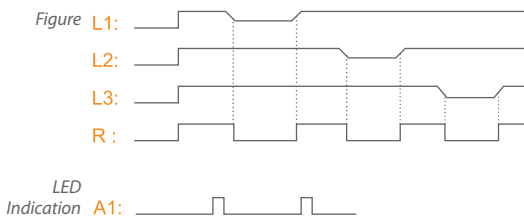

PTC Protection / Off delay operation

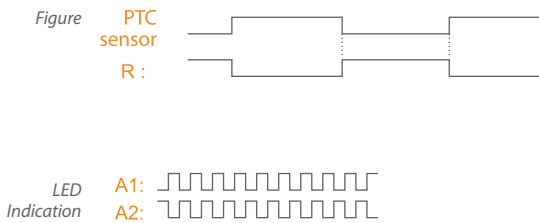







In order to use this function, PTC temperature sensors must be connected to the relay's PTC input. Under normal operating conditions the PTC resistance is below the response threshold. If the motor heats up excessively, it means resistance value is increased, the output relay de-energizes after 2 seconds delay.

The output relay re-energizes automatically as soon as the motor heat turns back to its normal operating conditions.



Type			G1-A	G1-SA	G1-SAP	G1D-SA	
<b>Definiton</b>			Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay	
<b>Order Number</b>			270136	270130	270131	270140	
<b>Casing Width(mm)</b>			17.5	17.5	17.5	17.5	
<b>Connections</b>			Screw terminal	Screw terminal	Screw terminal	Screw terminal	
<b>Network</b>			3Ø with neutral	3Ø with neutral	3Ø with neutral	3Ø without neutral	
<b>Monitoring Functions</b>	Phase Failure	Fixed delay time	500msec	500msec	500msec	500msec	
	Phase Sequence	Fixed delay time	-	500msec	500msec	500msec	
	Adjustable Unbalanced Protection	Range		± (5% => 20%)/ OFF	± (5% => 20%)/ OFF	± (5% => 20%)/ OFF	± (5% => 20%)/ OFF
		Hysteresis		3% x Un ≈ 6,9VAC	3% x Un ≈ 6,9VAC	3% x Un ≈ 6,9VAC	3% x Un ≈ 12 VAC
		Delay time		0.1=>10sec	0.1=>10sec	0.1=>10sec	0.1=>10sec
	Adjustable Voltage Protection	Upper limit		+ (5% => 20%)/OFF	+ (5% => 20%)/OFF	+ (5% => 20%)/OFF	+ (5% => 20%)/OFF
		Lower limit		-(5% => 20%)/OFF	-(5% => 20%)/OFF	-(5% => 20%)/OFF	-(5% => 20%)/OFF
		Hysteresis		6 VAC	6 VAC	6 VAC	6 VAC
		Delay time		0.1=>10sec for off delay operation	0.1=>10sec for off delay operation	0.1=>10sec for off delay operation	0.1=>10sec for off delay operation
	PTC Protection	Fixed delay time		-	-	2000msec	-
		Threshold		-	-	1100Ω	-
<b>Response time for monitoring any function</b>			Max. 250msec	Max. 250msec	Max. 250msec	Max. 250msec	
<b>Type of Output</b>			Relay	Relay	Relay	Relay	
<b>Auxiliary contacts</b>	Number of relay						
	Type		1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	
	Max. Ratings -AC		10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	
	Max. Switching Power		5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	
	Mechanical Life Time		≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	
	Electrical Life Time		5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	




					
G1D-SA-L	G1-TU	G1-SV	G1-SAT	G1-SVP	G1D-SV
Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay	Voltage monitoring relay
270141	270138	270139	270137	270180	270145
17.5	17,5	17,5	17,5	17,5	17,5
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
3Ø without neutral	3Ø with neutral	3Ø with neutral	3Ø with neutral	3Ø with neutral	3Ø without neutral
500msec	500msec	500msec	500msec	500msec	500msec
500msec	-	500msecec	500msec	500msec	500msec
± (5% => 20%)/ OFF	-	-	± (5% => 20%)/ OFF	-	-
3% x Un ≈ 6,9VAC	-	-	3% x Un ≈ 6,9VAC	-	-
0.1=>10sec	-	-	ton: 1=>15min, toff: 0.1=>10sec	-	-
+ (5% => 20%)/OFF	-	240V..300V	+ (5% => 20%)/OFF	240V..300V	400V..500V
-(5% => 20%)/OFF	< Un X 0,75	150V..210V	-(5% => 20%)/OFF	150V..210V	270V..370V
6 VAC	6 VAC	6 VAC	6 VAC	6 VAC	6 VAC
0.1=>10sec for off delay operation	ton: 1=>15min, toff=0.5sec	toff: 0.1=>10sec	ton: 1=>15min, toff: 0.1=>10sec	toff: 0.1=>10sec	toff: 0.1=>10sec
-	-	-	-	2000msec	-
-	-	-	-	1100Ω	-
Max. 250msec	Max. 250msec	Max. 250msec	Max. 250msec	Max. 250msec	Max. 250msec
Relay	Relay	Relay	Relay	Relay	Relay
	1	1	1	1	1
1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)
10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA
5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W
≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations
5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>4</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>4</sup> (5A@30VDC)

Type		G1-A	G1-SA	G1-SAP	G1D-SA
Supply Voltage	DC	-	-	-	-
	AC	230VAC ±25% from L3-N	230VAC ±25% from L3-N	230VAC ±25% from L3-N	380-480VAC ±25% from L1-L3
Supply Frequency		50-60Hz	50-60Hz	50-60Hz	50-60Hz
Control Input Voltage Range		-	-	-	-
Permissible ambient temperature	During operation	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
	During storage	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Relative Humidity		Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
Operating frequency		50-60Hz	50-60Hz	50-60Hz	50-60Hz
Degree of protection		IP20	IP20	IP20	IP20
Power consumption	DC	-	-	-	-
	AC	<3VA	<3VA	<3VA	<4VA
Weight(gr)		66	66	70	70
Permissible mounting position		any	any	any	any
Schematics					
Dimensional Drawings					





G1D-SA-L	G1-TU	G1-SV	G1-SAT	G1-SVP	G1D-SV
-	-	-	-	-	-
190-230VAC ±25% from L1-L3	230VAC ±25% from L3-N	230VAC ±25% from L3-N	230VAC ±25% from L3-N	230VAC ±25% from L3-N	380 .. 480V AC, ±%25
50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
-	-	-	-	-	-
-20 to +60 °C	-20 to +60 °C	-20°C...+70°C	-20 to +60 °C	-20°C...+70°C	-20°C...+70°C
-40 to +75 °C	-40 to +75 °C	-30°C...+80°C	-40 to +75 °C	-30°C...+80°C	-30°C...+80°C
Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
IP20	IP20	IP20	IP20	IP20	IP20
-	-	-	-	-	-
<4VA	<3VA	<3VA	<3VA	<3VA	<4VA
75	66	66	66	70	66
any	any	any	any	any	any

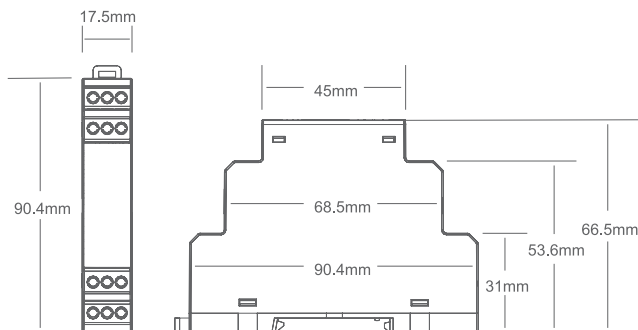



Type		G1-VM		G1-TUM	
<b>Definiton</b>		Voltage monitoring relay		Voltage monitoring relay	
<b>Order Number</b>		270 146		270 147	
<b>Casing Width(mm)</b>		17,5		17,5	
<b>Connections</b>		Screw terminal		Screw terminal	
<b>Network</b>		1Ø with neutral		1Ø with neutral	
<b>Monitoring Functions</b>	Phase Failure	Fixed delay time	500msec	500msec	
	Phase Sequence	Fixed delay time	-	-	
	Adjustable Unbalanced Protection	Range	-	-	
		Hysteresis	-	-	
		Delay time	-	-	
	Adjustable Voltage Protection	Upper limit	240V..300V	-	
		Lower limit	150V..210V	Umeasured < 0.75xUn	
		Hysteresis	6 VAC	6 VAC	
		Delay time	toff: 0. ec	ton: 1=>15min, toff=0.5sec	
	PTC Protection	Fixed delay time	-	-	
Threshold		-	-		
<b>Response time for monitoring any function</b>		Max. 250msec		Max. 250msec	
<b>Type of Output</b>		Relay		Relay	
<b>Auxiliary contacts</b>	Number of relay	1		1	
	Type	1 C/O (SPDT)		1 C/O (SPDT)	
	Max. Ratings -AC	10A/250V; 1250 VA		10A/250V; 1250 VA	
	Max. Switching Power	5A/30VDC; 150W		5A/30VDC; 150W	
	Mechanical Life Time	≥ 10 <sup>7</sup>		≥ 10 <sup>7</sup>	
	Electrical Life Time	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>4</sup> (5A@30VDC)		5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>4</sup> (5A@30VDC)	



Type		G1-VM	G1-TUM	
Supply Voltage	DC	-	-	
	AC	230V AC, ±%25	230V AC, ±%25	
Supply Frequency		50-60Hz	50-60Hz	
Control Input Voltage Range		-	-	
Permissible ambient temperature	During operation	-20°C..+70°C	-20°C..+70°C	
	During storage	-30°C..+80°C	-30°C..+80°C	
Relative Humidity		Max.95% (no condensation)	Max.95% (no condensation)	
Operating frequency		50-60Hz	50-60Hz	
Degree of protection		IP20	IP20	
Power consumption	DC	-	-	
	AC	<4VA	<4VA	
Weight(gr)		66	66	
Permissible mounting position		any	any	
Schematics				
Dimensional Drawings				




Type		M1-A	M1-SP	M1-SA	M1-SAP	M1D-SA	M1D-S	
<b>Definiton</b>		Motor protection relay	Motor protection relay	Motor protection relay	Motor protection relay	Motor protection relay	Motor protection relay	
<b>Order Number</b>		270134	270135	270132	270133	270144	270142	
<b>Casing Width(mm)</b>		17.5	17.5	17.5	17.5	17.5	17.5	
<b>Connections</b>		Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	
<b>Network</b>		3Ø with neutral	3Ø with neutral	3Ø with neutral	3Ø with neutral	3Ø without neutral	3Ø without neutral	
<b>Monitoring Functions</b>	Phase Failure	Fixed delay time	500msec	500msec	500msec	500msec	500msec	
	Phase Sequence	Fixed delay time	-	500msec	500msec	500msec	500msec	
	Fixed Unbalanced Protection	Limit	± 20%	-	± 20%	± 20%	± 20%	-
		Hysteresis	3% x Un ≈ 6,9VAC	-	3% x Un ≈ 6,9VAC	3% x Un ≈ 6,9VAC	3% x Un ≈ 12VAC	-
		Delay time	2000msec	-	2000msec	2000msec	2000msec	-
	PTC Protection	Fixed delay time	-	2000msec	-	2000msec	-	-
Threshold		-	≈1100Ω	-	≈1100Ω	-	-	
<b>Response time for monitoring any function</b>		Max.250msec	Max.250msec	Max.250msec	Max.250msec	Max.250msec	Max.250msec	
<b>Type of Output</b>		Relay	Relay	Relay	Relay	Relay	Relay	
<b>Auxiliary contacts</b>	Number of relay	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	
	Type	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	10A/250V; 1250 VA	
	Max. Ratings -AC	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	
	Max. Switching Power	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	
	Mechanical Life Time	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	5×10 <sup>4</sup> (5A@250VAC) 1×10 <sup>5</sup> (5A@30VDC)	
<b>Supply Voltage</b>		230VAC ±25% from L3-N	230VAC ±25% from L3-N	230VAC ±25% from L3-N	230VAC ±25% from L3-N	380-480±25% from L3-N	380-480±25% from L3-N	
<b>Supply Frequency</b>		50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz	
<b>Permissible ambient temperature</b>	During operation	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	
	During storage	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	
<b>Relative Humidity</b>		Max. 95% (no condensation)	Max. 95% (no condensation)	Max. 95% (no condensation)	Max. 95% (no condensation)	Max. 95% (no condensation)	Max. 95% (no condensation)	
<b>Operating frequency</b>		50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz	




Type	M1-A	M1-SP	M1-SA	M1-SAP	M1D-SA	M1D-S	
Degree of protection	IP20	IP20	IP20	IP20	IP20	IP20	
Power consumption	DC	-	-	-	-	-	
	AC	<3VA	<3VA	<3VA	<3VA	<4VA	
Permissible mounting position	any	any	any	any	any	any	
Weight(gr)	66	69	65	69	70	74	
Schematics							
Dimensional Drawings							

## Phase Failure / Off delay operation

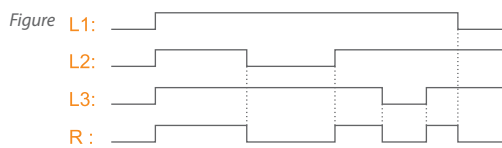


If a phase failure occurs the output relay de-energizes in 500msec.  
 The output relay re-energizes automatically as soon as the voltage returns to the tolerance range.

## Phase Sequence Error / Off delay operation

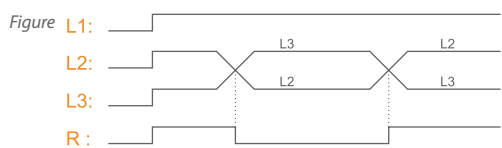


If a phase sequence error occurs the output relay de-energizes in 500msec.  
 The output relay re-energizes automatically as soon as the phase sequence is correct again.

## Adjustable Unbalance Protection / Off delay operation

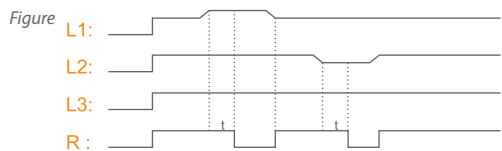

If the voltage to be monitored exceeds or falls below the set phase unbalance threshold percentage(5--20), the output relay de-energizes after time delay(0.1-10s). As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 3%Un the output relay re-energizes automatically.

## Fixed Unbalance Protection / Off delay operation

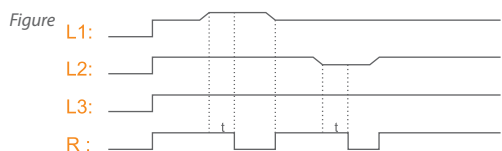


If the voltage to be monitored exceeds or falls below the set phase unbalance threshold percentage (20), the output relay de-energizes after time delay(2sec). As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 3%Un the output relay re-energizes automatically.




Adjustable Voltage Protection / Off delay operation

Over Voltage

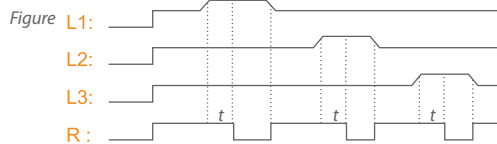

Under Voltage

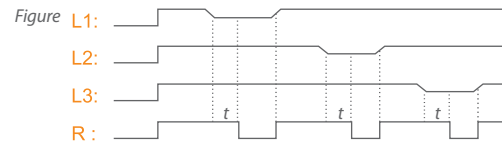

If the voltage to be monitored exceeds or falls below adjusted high limit or low limit value, the output relay de-energizes after time delay (0.1=>10sec). As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 6VAC, the output relay re-energizes automatically.

PTC Protection / Off delay operation



In order to use this function, PTC temperature sensors must be connected to the relay's PTC input. Under normal operating conditions the PTC resistance is below the response threshold. If the motor heats up excessively, it means resistance value is increased, the output relay de-energizes after 2 seconds delay.

The output relay re-energizes automatically as soon as the motor heat turns back to its normal operating conditions.





# Alarm Management Solutions



## **Defining** an alarm annunciator **in** simple terms

An alarm annunciator is an automation device that provides immediate fault recognition, fault identification, visual and audible alarm for an abnormal process situation.

---

## **In which** fields are they most commonly used?

Monitoring  
Controlling  
Communication  
Data Logging  
Visualizing

An alarm annunciator **monitors** input parameters continuously.

When a faulty condition occurs, it **visualizes** alarm status immediately or with adjustable time delay.

It provides to **control** your process through relay outputs and modbus **communication**.

**Data logging** with real time gives you opportunity to analyze your system.

---

## **In which** fields are they most commonly used?

- Medium voltage modular cabinets
  - Electric power plants and substations
  - Industrial plants and processes
  - Technical installations in buildings
  - Water treatment plants, etc.
-




## Benefits and Advantages

- Adjustable 2 color options
- Four integrated push buttons for buzzer, alarm accept, alarm clear and led test.
- Three flashing rates indicate different types of faults
- Easy configuration with dip-switches
- DC or AC supply/input voltage.
- Super bright LEDs for long distance visibility
- Various sizes & fonts for window inscription.
- Highly compact and light weight
- Modbus communication
- High Electromagnetic Compatibility (EMC) i.e. maximum immunity to interferences.
- Self-Extinguishing plastic housing.

## Layout & Mounting

Klemsan alarm annunciators are suitable for panel mounting for 96x96mm or 144x144mm standards.

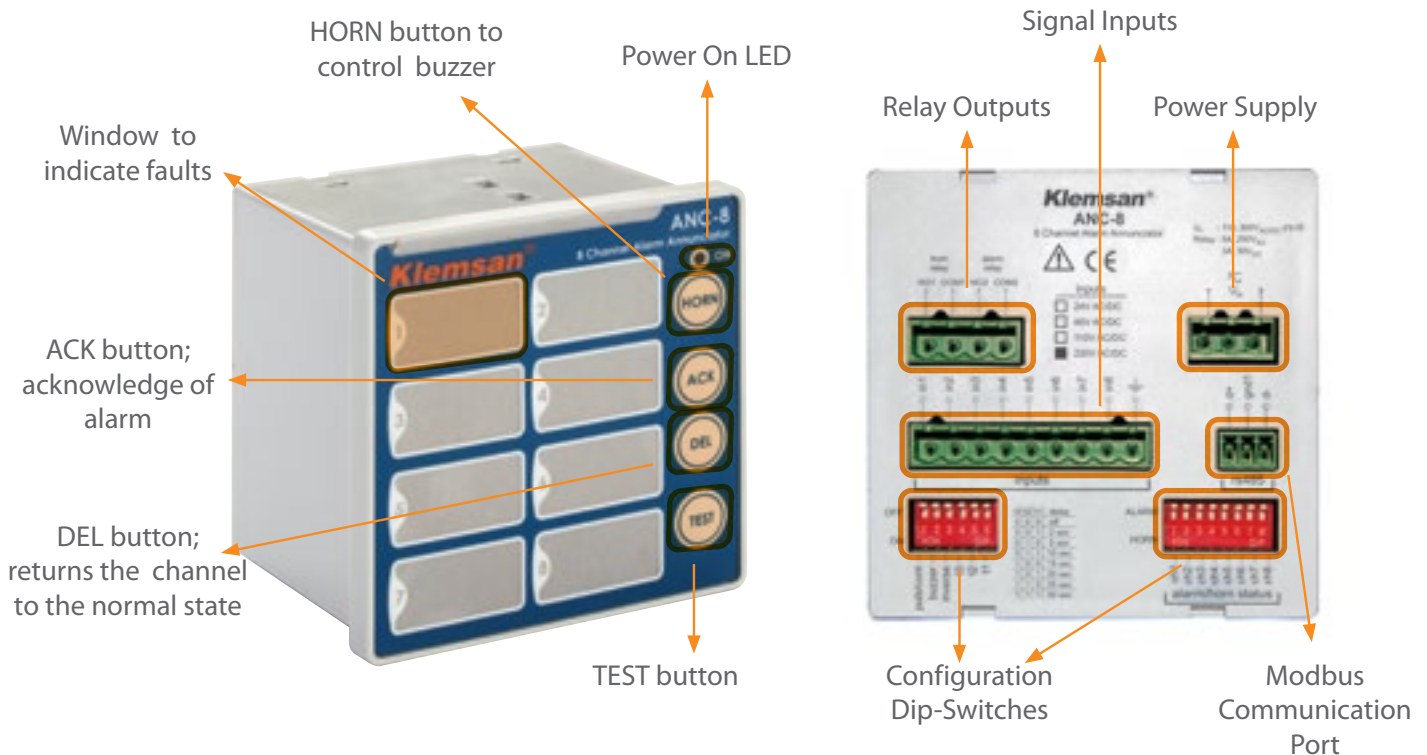

**ANC-8 Alarm Annunciator**

## Alarm Monitoring for Steel Plants



Alarm points for various parameters such as pressures, flow temperatures, speeds for different turbines.



ALARM  
MANAGEMENT  
ANC series

## Alarm Status of Battery-Backup System



Backup batteries power can be checked automatically with their internal alarm system. When their alarm status wants to be monitored over PC, ANC series present best solution thanks to its modbus communication.



ALARM MONITORING  
over MODBUS  
ANC series

## Facility Monitoring



When problems in power, UPS, generator, temperature/humidity, fire/smoke, MVAC, leak detection etc. exist, they all can be monitored over PC with modbus communication.



SIGNAL MONITORING  
over PC  
ANC series

## Natural Gas Power Stations



Faults of gas turbine, steam turbine, cooling water supply, power lines, generator etc. can be monitored instantaneously with signal inputs.



SIGNAL MONITORING  
LSK Series



## Pumping Stations



Monitoring pump position and controlling by means of output relays



CONTROLLING PUMP POSITION  
*ALRC-6*

## Electrical Control Room




Providing an immediate fault recognition, fault identification and a visual/audible alarm in order to call attention to an abnormal process condition.



CONTROL MANAGEMENT  
*ANC series*

## Panel Indicator Lights

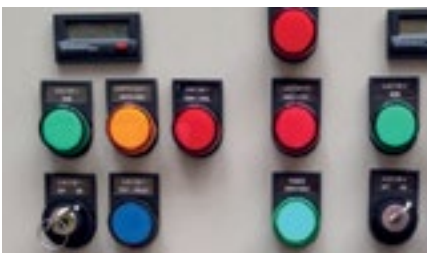

Instead of using separate alarm indicator lights, using signal modules gives you opportunity to save space and installation time with monitoring all signals the same window.



SIGNAL MONITORING  
*LSK Series*

## Level Monitoring with Level Switches



Immediately monitoring over PC when certain levels are reached with using liquid level switches.



MONITORING and CONTROLLING  
*ALRC-6*

## Fault Detection



Monitoring process faults with alarm relay controller provides you to stop them rapidly in order to prevent much worse conditions thanks to alarm relay outputs.










ALARM MANAGEMENT  
*ALRC-6*





Type			ALRC-6 (24VAC/DC)	ALRC-6 (48VAC/DC)	ALRC-6 (110VAC/DC)	ALRC-6 (220VAC/DC)	ANC-8 (24VAC/DC)
<b>Definiton</b>			Alarm relay controller	Alarm relay controller	Alarm relay controller	Alarm relay controller	Alarm annunciator
<b>Order Number</b>			604610	604611	604612	604613	604620
<b>Input Signal</b>	Voltage	AC	24V	48V	110V	220V	24V
		DC	24V	48V	110V	220V	24V
	Frequency		45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz
	Numbers		6	6	6	6	8
Response Time			25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec
<b>Output Contacts</b>	Type of Output		Relay	Relay	Relay	Relay	Relay
	Number of contacts		8	8	8	8	2
	Type		1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)
	Max switching AC		5A / 250 V AC /1250 VA	5A / 250 V AC /1250 VA	5A / 250 V AC /1250 VA	5A / 250 V AC /1250 VA	5A / 250 V AC /1250 VA
	Max switching DC		3A / 30 V DC / 90 W	3A / 30 V DC / 90 W	3A / 30 V DC / 90 W	3A / 30 V DC / 90 W	3A / 30 V DC / 90 W
	Mechanical Life Time		≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations
	Electrical Life Time Operations (for NO side)		1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)
<b>Window</b>	Numbers		6	6	6	6	8
	Colours		Red	Red	Red	Red	Red/Green selectable
	Sizes(mm)		30.5x21.6	30.5x21.6	30.5x21.6	30.5x21.6	30.5x15.5
	Illuminating for Each Window		With 4 pcs. red leds	With 4 pcs. red leds	With 4 pcs. red leds	With 4 pcs. red leds	With 4 pcs. red leds or 4 pcs. green leds
	Flash rate	Slow	-	-	-	-	60 Flash/Min
		Fast	90 Flash/Min	90 Flash/Min	90 Flash/Min	90 Flash/Min	180 Flash/Min
Marking		Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	
<b>Mod</b>	ANC		-	-	-	-	Available
	LSK		-	-	-	-	-
<b>Time Range(sec)</b>			-	-	-	-	0, 2, 5, 10, 15, 20, 25, 30 adjustable
<b>Inbuilt Push Buttons</b>			3 nos.(Horn, Delete, Test)	3 nos.(Horn, Delete, Test)	3 nos.(Horn, Delete, Test)	3 nos.(Horn, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)
<b>Buzzer</b>			-	-	-	-	Available
<b>Communication</b>	Protocol		-	-	-	-	Modbus-RTU
	Baud Rate		-	-	-	-	1200-57600
	Isolation		-	-	-	-	2500 Vrms
<b>Real Time Event Recording</b>			-	-	-	-	6080 logs
<b>Battery Life</b>			-	-	-	-	> 5years
<b>Supply</b>	Voltage	AC	24V ±%30	48V ±%30	110V ±%30	220V ±%30	110-300V ±%10
		DC	24V ±%30	48V ±%30	110V ±%30	220V ±%30	85-300V
	Frequency		45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz



						
ANC-8 (48VAC/DC)	ANC-8 (110VAC/DC)	ANC-8 (220VAC/DC)	ANC-16 (24VAC/DC)	ANC-16 (48VAC/DC)	ANC-16 (110VAC/DC)	ANC-16 (220VAC/DC)
Alarm annunciator	Alarm annunciator	Alarm annunciator	Alarm annunciator	Alarm annunciator	Alarm annunciator	Alarm annunciator
604621	604622	604623	604630	604631	604632	604633
48V	110V	220V	24V	48V	110V	220V
48V	110V	220V	24V	48V	110V	220V
45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz
8	8	8	16	16	16	16
25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec
Relay	Relay	Relay	Relay	Relay	Relay	Relay
2	2	2	2	2	2	2
1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)
5A / 250 VAC /1250 VA	5A / 250 VAC /1250 VA	5A / 250 VAC /1250 VA	5A / 250 VAC /1250 VA	5A / 250 VAC /1250 VA	5A / 250 VAC /1250 VA	5A / 250 VAC /1250 VA
3A / 30 VDC /90 W	3A / 30 VDC /90 W	3A / 30 VDC /90 W	3A / 30 VDC /90 W	3A / 30 VDC /90 W	3A / 30 VDC /90 W	3A / 30 VDC /90 W
≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations
1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)
8	8	8	16	16	16	16
Red/Green selectable	Red/Green selectable	Red/Green selectable	Red/Green selectable	Red/Green selectable	Red/Green selectable	Red/Green selectable
30.5x15.5	30.5x15.5	30.5x15.5	44,8x11,9	44,8x11,9	44,8x11,9	44,8x11,9
With 4 pcs. red leds or 4 pcs. green leds	With 4 pcs. red leds or 4 pcs. green leds	With 4 pcs. red leds or 4 pcs. green leds	With 4 pcs. red leds or 4 pcs. green leds	With 4 pcs. red leds or 4 pcs. green leds	With 4 pcs. red leds or 4 pcs. green leds	With 4 pcs. red leds or 4 pcs. green leds
60 Flash/Min	60 Flash/Min	60 Flash/Min	60 Flash/Min	60 Flash/Min	60 Flash/Min	60 Flash/Min
180 Flash/Min	180 Flash/Min	180 Flash/Min	180 Flash/Min	180 Flash/Min	180 Flash/Min	180 Flash/Min
Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.
Available	Available	Available	Available	Available	Available	Available
-	-	-	-	-	-	-
0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable
4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)
Available	Available	Available	Available	Available	Available	Available
Modbus-RTU	Modbus-RTU	Modbus-RTU	Modbus-RTU	Modbus-RTU	Modbus-RTU	Modbus-RTU
1200-57600	1200-57600	1200-57600	1200-57600	1200-57600	1200-57600	1200-57600
2500 Vrms	2500 Vrms	2500 Vrms	2500 Vrms	2500 Vrms	2500 Vrms	2500 Vrms
6080 logs	6080 logs	6080 logs	6080 logs	6080 logs	6080 logs	6080 logs
> 5years	> 5years	> 5years	> 5years	> 5years	> 5years	> 5years
110-300V ±%10	110-300V ±%10	110-300V ±%10	85-300V	85-300V	85-300V	85-300V
110-300V ±%10	110-300V ±%10	110-300V ±%10	85-300V	85-300V	85-300V	85-300V
45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz







Type		ALRC-6 (24VAC/DC)	ALRC-6 (48VAC/DC)	ALRC-6 (110VAC/DC)	ALRC-6 (220VAC/DC)	ANC-8 (24VAC/DC)	
Power consumption	DC	<3W	<3W	<1W	<5.5W	<3W	
	AC	<10VA	<10VA	<4.3VA	<7.2VA	<5VA	
Permissible ambient temperature	During operation	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +70 °C	
	During storage	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-30 to +80 °C	
Relative Humidity		Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.90% (no condensation)	
Degree of protection		IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	
Connections		Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	
Dimensions (mm)	Bezel/Overall	Height(mm)	96	96	96	96	96.8
		Width(mm)	96	96	96	96	96.8
	Panel Cutout	Height(mm)	89.6	89.6	89.6	89.6	89.6
		Width(mm)	89.6	89.6	89.6	89.6	89.6
		Depth(mm)	66	66	66	66	65
Weight(gr)		274	274	274	274	280	

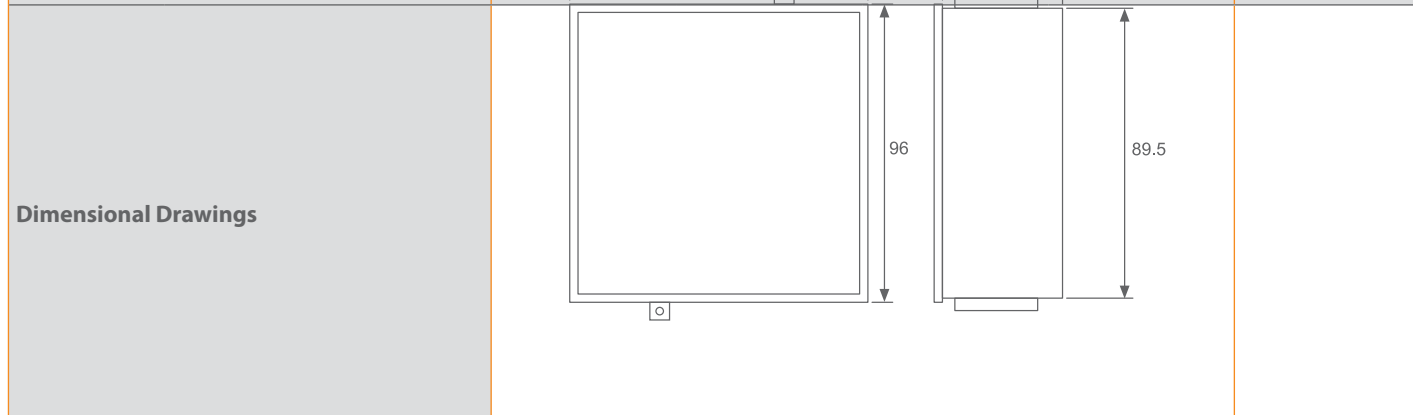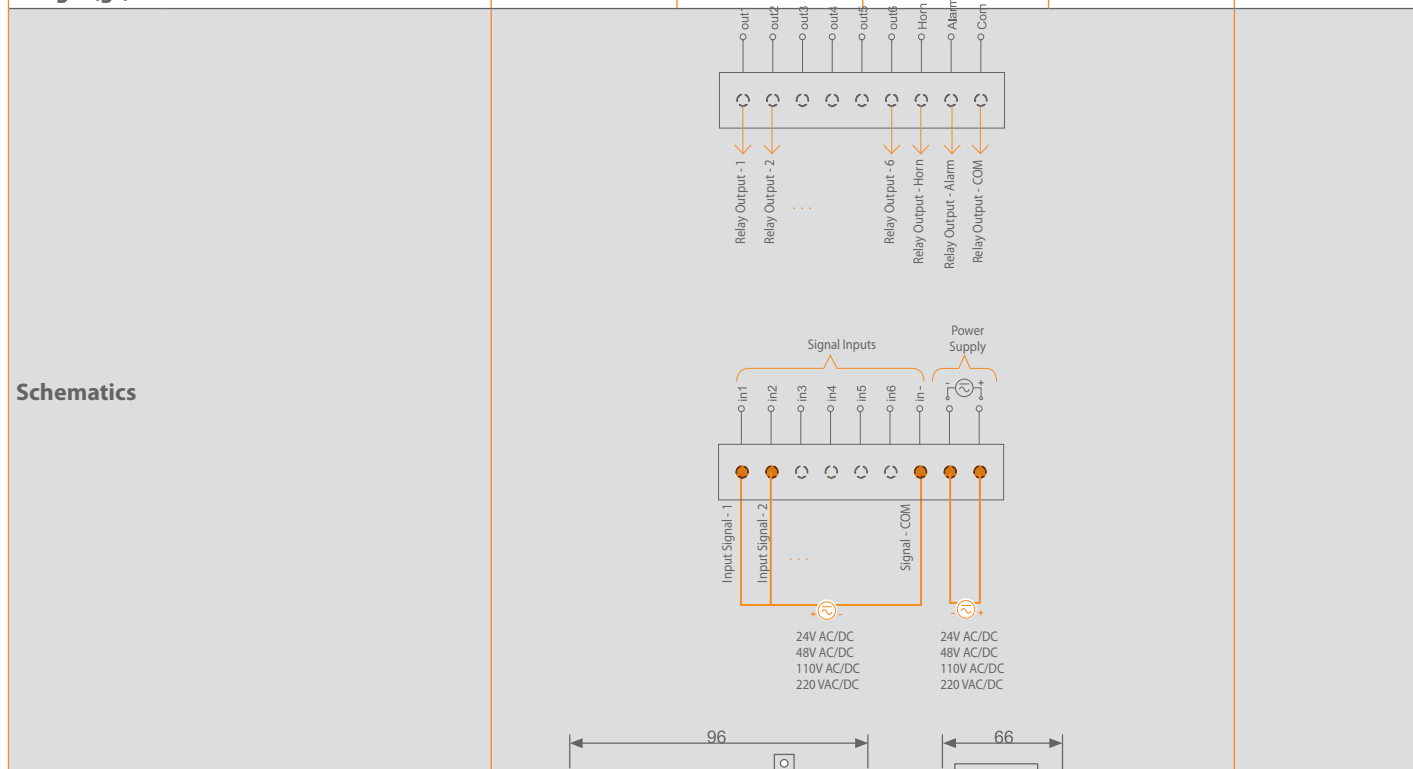







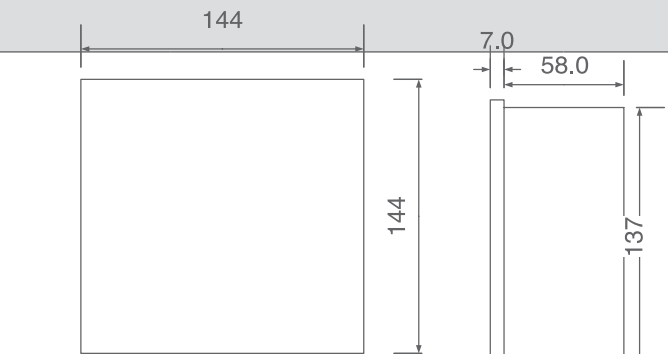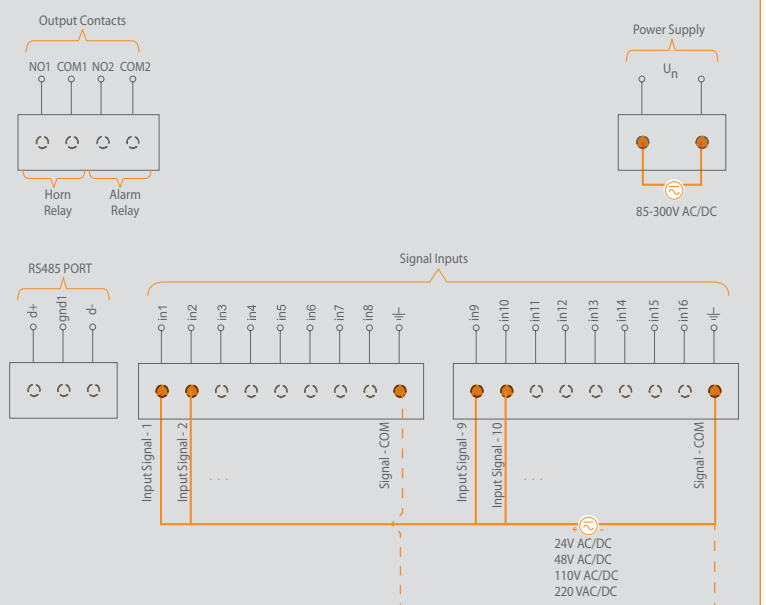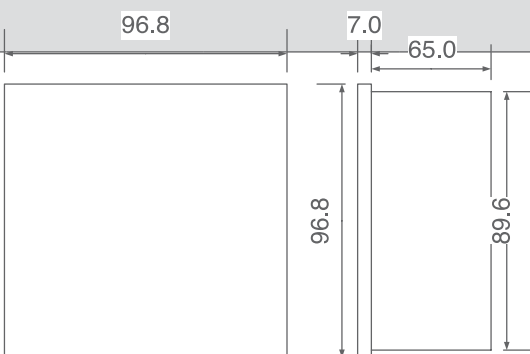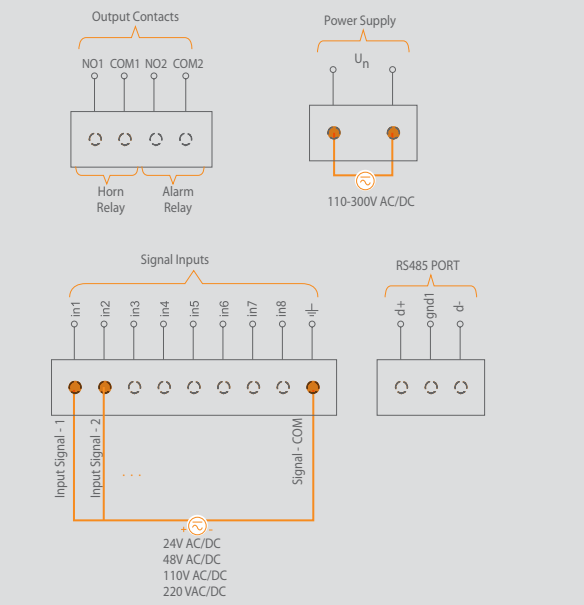




ANC-8 (48VAC/DC)	ANC-8 (110VAC/DC)	ANC-8 (220VAC/DC)	ANC-16 (24VAC/DC)	ANC-16 (48VAC/DC)	ANC-16 (110VAC/DC)	ANC-16 (220VAC/DC)
<3W	<3W	<3W	<5W	<5W	<5W	<5W
<5VA	<5VA	<5VA	<7.5VA	<7.5VA	<7.5VA	<7.5VA
-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C
-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C
Max.90% (no condensation)	Max.90% (no condensation)	Max.90% (no condensation)	Max.90% (no condensation)	Max.90% (no condensation)	Max.90% (no condensation)	Max.90% (no condensation)
IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
96.8	96.8	96.8	144	144	144	144
96.8	96.8	96.8	144	144	144	144
89.6	89.6	89.6	137	137	137	137
89.6	89.6	89.6	137	137	137	137
65	65	65	58	58	58	58
280	280	280	517	517	517	517







Type			ANC-16 (24VAC/DC)	ANC-16 (48VAC/DC)	ANC-16 (110VAC/DC)	ANC-16 (220VAC/DC)	ANC-24 (24V AC/ DC, 85-300V AC/ DC p.s.)
<b>Definiton</b>			Alarm annunciator	Alarm annunciator	Alarm annunciator	Alarm annunciator	Alarm annunciator
<b>Order Number</b>			604650	604651	604652	604653	604660
<b>Input Signal</b>	Voltage	AC	24V	48V	110V	220V	24V
		DC	24V	48V	110V	220V	24V
	Frequency		45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz
	Numbers		16	16	16	16	24
Response Time		25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	
<b>Output Contacts</b>	Type of Output		Relay	Relay	Relay	Relay	Relay
	Number of contacts		2	2	2	2	2
	Type		1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)
	Max ratings-AC		5A/277V; 1385 VA	5A/277V; 1385 VA	5A/277V; 1385 VA	5A/277V; 1385 VA	5A/277V; 1385 VA
	Max ratings-DC		5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W
	Mechanical Life Time		≥ 10 <sup>^</sup> 8 operations	≥ 10 <sup>^</sup> 8 operations	≥ 10 <sup>^</sup> 8 operations	≥ 10 <sup>^</sup> 8 operations	≥ 10 <sup>^</sup> 8 operations
	Electrical Life Time Operations (for NO side)		1×10 <sup>^</sup> 5(5A@250VAC)	1×10 <sup>^</sup> 5(5A@250VAC)	1×10 <sup>^</sup> 5(5A@250VAC)	1×10 <sup>^</sup> 5(5A@250VAC)	1×10 <sup>^</sup> 5(5A@250VAC)
<b>Window</b>	Numbers		16	16	16	16	24
	Colours		Red/Green selectable	Red/Green selectable	Red/Green selectable	Red/Green selectable	Red/Green selectable
	Sizes(mm)		44,8x11,9	44,8x11,9	44,8x11,9	44,8x11,9	24,4x11,9
	Illuminating for Each Window		With 4 pcs. leds or 4 pcs. green led	With 4 pcs. leds or 4 pcs. green led	With 4 pcs. leds or 4 pcs. green led	With 4 pcs. leds or 4 pcs. green led	With 2pcs. leds or 2 pcs. green led
	Flash rate	Slow	60 Flash/Min	60 Flash/Min	60 Flash/Min	60 Flash/Min	60 Flash/Min
		Fast	180 Flash/Min	180 Flash/Min	180 Flash/Min	180 Flash/Min	180 Flash/Min
Marking		Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	
<b>Mod</b>	ANC		Available	Available	Available	Available	Available
	LSK		Available	Available	Available	Available	Available
<b>Time Range(sec)</b>			0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable
<b>Inbuilt Push Buttons</b>			4 nos.(Horn, Ack, Delete, Test)	5 nos.(Horn, Ack, Delete, Test)	6 nos.(Horn, Ack, Delete, Test)	7 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)
<b>Buzzer</b>			Available	Available	Available	Available	Available
<b>Communication</b>	Protocol		Modbus-RTU	Modbus-RTU	Modbus-RTU	Modbus-RTU	Modbus-RTU
	Baud Rate		1200-57600	1200-57600	1200-57600	1200-57600	1200-57600
	Isolation		2500 Vrms	2500 Vrms	2500 Vrms	2500 Vrms	2500 Vrms
<b>Real Time Event Recording</b>			6080 logs	6081 logs	6082 logs	6083 logs	6080 logs
<b>Battery Life</b>			> 5 years	> 5 years	> 5 years	> 5 years	>5 years
<b>Supply</b>	Voltage	AC	24-50V ±%10	24-50V ±%10	24-50V ±%10	24-50V ±%10	85-300V ±%10
		DC	24-50V ±%10	24-50V ±%10	24-50V ±%10	24-50V ±%10	85-300V ±%10
	Frequency		45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz
<b>Power consumption</b>	AC		< 10VA	< 10VA	< 10VA	< 10VA	< 10VA
	DC		<5W	<5W	<5W	<5W	< 5W





						
Alarm annunciator	Alarm annunciator	Alarm annunciator	Alarm annunciator	Alarm annunciator	Alarm annunciator	Alarm annunciator
604661	604662	604663	604665	604666	604667	604668
48V	110V	220V	24V	48V	110V	220V
48V	110V	220V	24V	48V	110V	220V
45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz
24	24	24	24	24	24	24
25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec
Relay	Relay	Relay	Relay	Relay	Relay	Relay
2	2	2	2	2	2	2
1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)
5A/277V; 1385 VA	5A/277V; 1385 VA	5A/277V; 1385 VA	5A/277V; 1385 VA	5A/277V; 1385 VA	5A/277V; 1385 VA	5A/277V; 1385 VA
5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W
≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations
1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)
24	24	24	24	24	24	24
Red/Green selectable	Red/Green selectable	Red/Green selectable	Red/Green selectable	Red/Green selectable	Red/Green selectable	Red/Green selectable
24,4x11,9	24,4x11,9	24,4x11,9	24,4x11,9	24,4x11,9	24,4x11,9	24,4x11,9
With 2pcs. leds or 2 pcs. green led	With 2pcs. leds or 2 pcs. green led	With 2pcs. leds or 2 pcs. green led	With 2pcs. leds or 2 pcs. green led	With 2pcs. leds or 2 pcs. green led	With 2pcs. leds or 2 pcs. green led	With 2pcs. leds or 2 pcs. green led
60 Flash/Min	60 Flash/Min	60 Flash/Min	60 Flash/Min	60 Flash/Min	60 Flash/Min	60 Flash/Min
180 Flash/Min	180 Flash/Min	180 Flash/Min	180 Flash/Min	180 Flash/Min	180 Flash/Min	180 Flash/Min
Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.
Available	Available	Available	Available	Available	Available	Available
Available	Available	Available	Available	Available	Available	Available
0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable
4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)
Available	Available	Available	Available	Available	Available	Available
Modbus-RTU	Modbus-RTU	Modbus-RTU	Modbus-RTU	Modbus-RTU	Modbus-RTU	Modbus-RTU
1200-57600	1200-57600	1200-57600	1200-57600	1200-57600	1200-57600	1200-57600
2500 Vrms	2500 Vrms	2500 Vrms	2500 Vrms	2500 Vrms	2500 Vrms	2500 Vrms
6080 logs	6080 logs	6080 logs	6080 logs	6080 logs	6080 logs	6080 logs
>5 years	>5 years	>5 years	>5 years	>5 years	>5 years	>5 years
85-300V ±%10	85-300V ±%10	85-300V ±%10	24-50V ±%10	24-50V ±%10	24-50V ±%10	24-50V ±%10
85-300V ±%10	85-300V ±%10	85-300V ±%10	24-50V ±%10	24-50V ±%10	24-50V ±%10	24-50V ±%10
45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz
< 10VA	< 10VA	< 10VA	< 10VA	< 10VA	< 10VA	< 10VA
< 5W	< 5W	< 5W	< 5W	< 5W	< 5W	< 5W



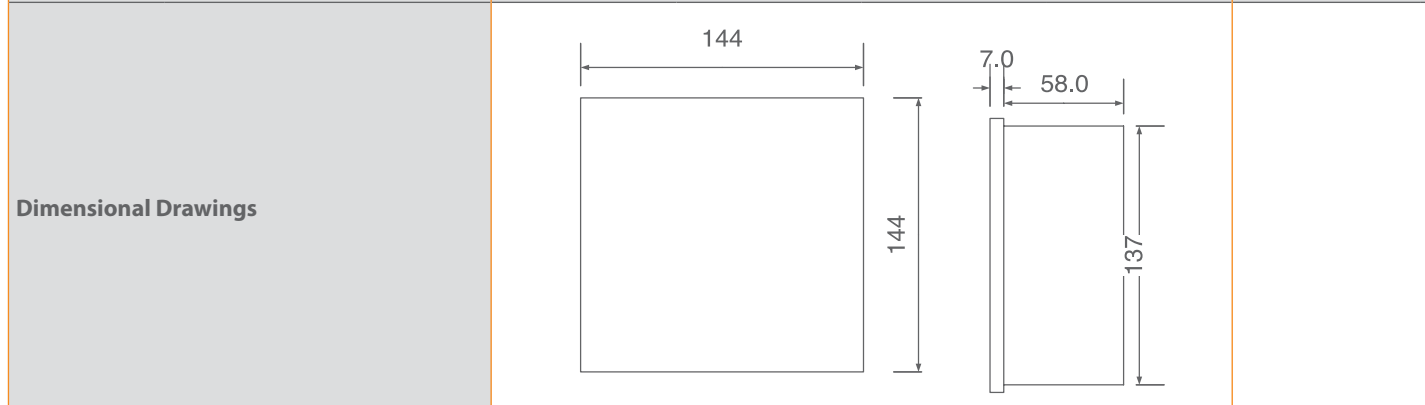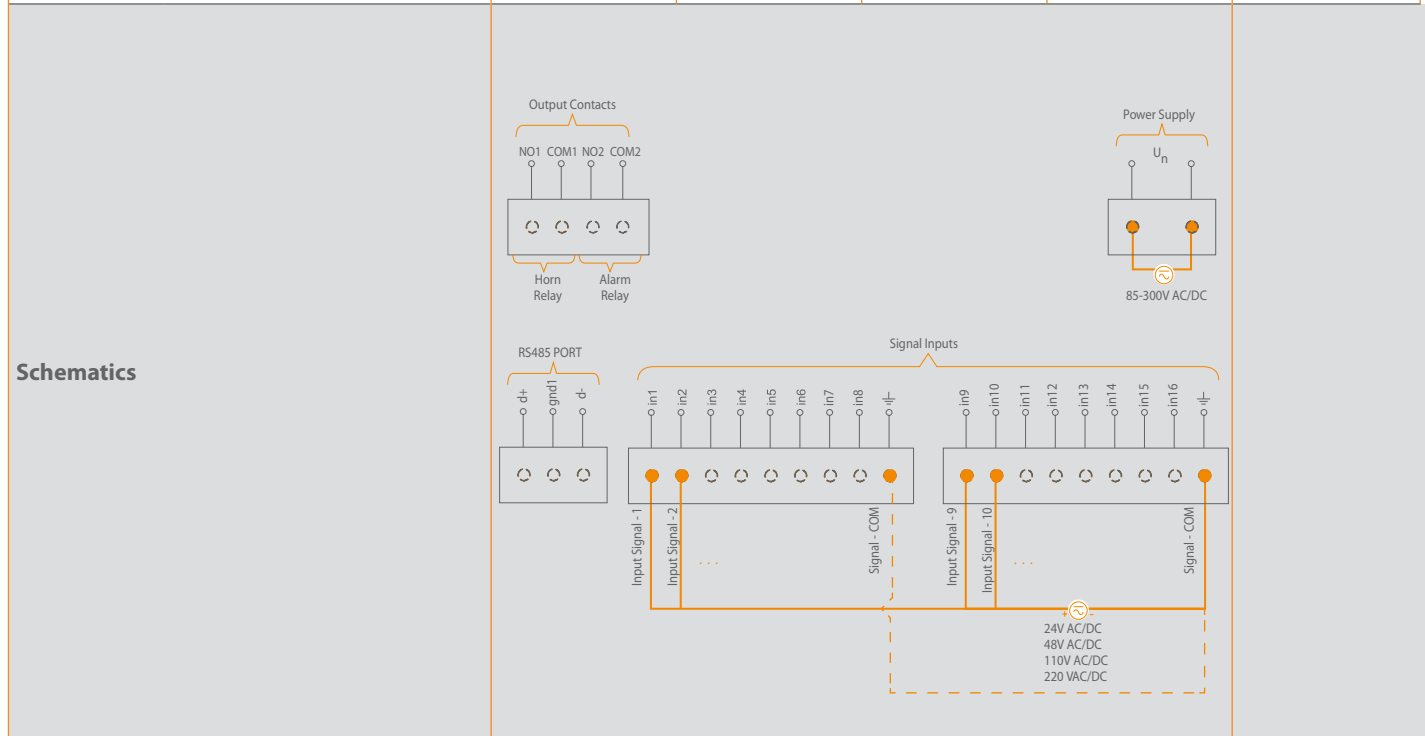

Type		ANC-16 (24VAC/DC)	ANC-16 (48VAC/DC)	ANC-16 (110VAC/DC)	ANC-16 (220VAC/DC)	ANC-24 (24V AC/DC, 85- 300V AC/DC p.s.)	
Permissible ambient temperature	During operation	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	
	During storage	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	
Relative Humidity		Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	
Degree of protection		IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	
Connections		Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	
Dimensions (mm)	Bezel/Overall	Height(mm)	144	144	144	144	
		Width(mm)	144	144	144	144	
	Panel Cutout	Height(mm)	137	137	137	137	137
		Depth(mm)	58	58	58	58	58
Weight(gr)		540	540	540	540	540	



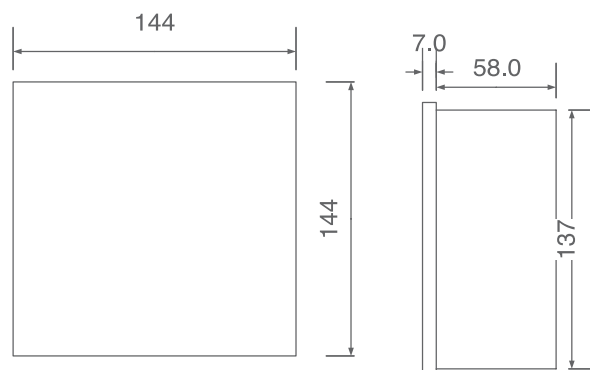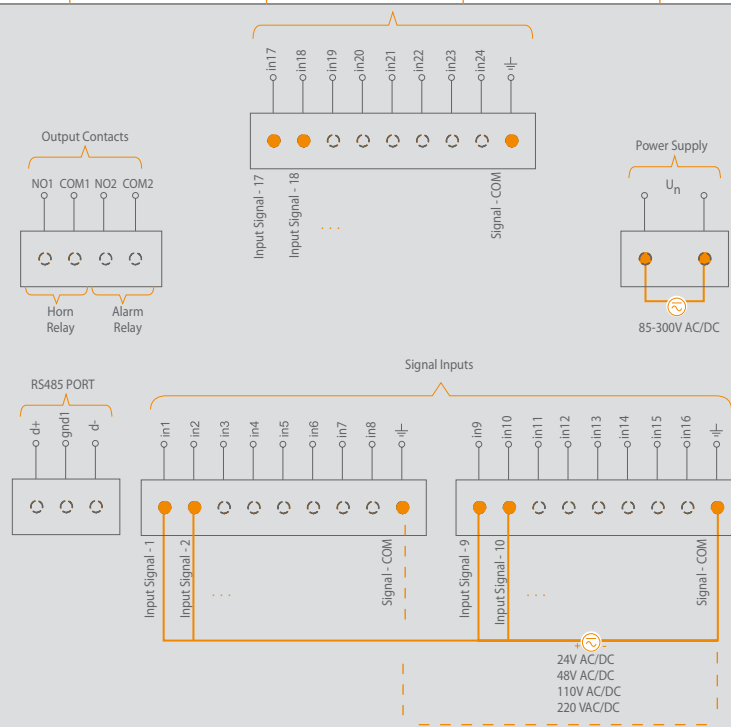





ANC-24 (48V AC/DC, 85-300V AC/ DC p.s.)	ANC-24 (110V AC/DC, 85-300V AC/ DC p.s.)	ANC-24 (220V AC/DC, 85-300V AC/ DC p.s.)	ANC-24 (24V AC/DC, 24-50VAC/DC p.s.)	ANC-24 (48V AC/DC, 24-50VAC/DC p.s.)	ANC-24 (110V AC/DC, 24-50VAC/DC p.s.)	ANC-24 (220V AC/DC, 24-50VAC/DC p.s.)
-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
144	144	144	144	144	144	144
144	144	144	144	144	144	144
137	137	137	137	137	137	137
137	137	137	137	137	137	137
58	58	58	58	58	58	58
540	540	540	540	540	540	540





						
Type			<b>ANC-32 (24V AC/DC, 85-300V AC/DC p.s.)</b>	<b>ANC-32 (48V AC/DC, 85-300V AC/DC p.s.)</b>	<b>ANC-32 (110V AC/DC, 85-300V AC/DC p.s.)</b>	<b>ANC-32 (220V AC/DC, 85-300V AC/DC p.s.)</b>
<b>Definiton</b>			Alarm annunciator	Alarm annunciator	Alarm annunciator	Alarm annunciator
<b>Order Number</b>			604670	604671	604672	604673
<b>Input Signal</b>	Voltage	AC	24V	48V	110V	220V
		DC	24V	48V	110V	220V
	Frequency		45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz
	Numbers		32	32	32	32
Response Time		25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	
<b>Output Contacts</b>	Type of Output		Relay	Relay	Relay	Relay
	Number of contacts		2	2	2	2
	Type		1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)
	Max ratings-AC		5A/277V; 1385 VA	5A/277V; 1385 VA	5A/277V; 1385 VA	5A/277V; 1385 VA
	Max ratings-DC		5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W
	Mechanical Life Time		≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations
	Electrical Life Time Operations (for NO side)		1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)
<b>Window</b>	Numbers		32	32	32	32
	Colours		Red/Green selectable	Red/Green selectable	Red/Green selectable	Red/Green selectable
	Sizes(mm)		15,3x11,9	15,3x11,9	15,3x11,9	15,3x11,9
	Illuminating for Each Window		With 2pcs. leds or 2 pcs. green led	With 2pcs. leds or 2 pcs. green led	With 2pcs. leds or 2 pcs. green led	With 2pcs. leds or 2 pcs. green led
	Flash rate	Slow	60 Flash/Min	60 Flash/Min	60 Flash/Min	60 Flash/Min
		Fast	180 Flash/Min	180 Flash/Min	180 Flash/Min	180 Flash/Min
Marking		Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	
<b>Mod</b>	ANC		Available	Available	Available	Available
	LSK		Available	Available	Available	Available
<b>Time Range(sec)</b>			0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable
<b>Inbuilt Push Buttons</b>			4 nos. (Horn, Ack, Delete, Test)	4 nos. (Horn, Ack, Delete, Test)	4 nos. (Horn, Ack, Delete, Test)	4 nos. (Horn, Ack, Delete, Test)
<b>Buzzer</b>			Available	Available	Available	Available
<b>Communication</b>	Protocol		Modbus-RTU	Modbus-RTU	Modbus-RTU	Modbus-RTU
	Baud Rate		1200-57600	1200-57600	1200-57600	1200-57600
	Isolation		2500 Vrms	2500 Vrms	2500 Vrms	2500 Vrms
<b>Real Time Event Recording</b>			6080 logs	6080 logs	6080 logs	6080 logs
<b>Battery Life</b>			> 5 years	> 5 years	> 5 years	> 5 years
<b>Voltage Supply</b>	Voltage	AC	85-300V ±%10	85-300V ±%10	85-300V ±%10	85-300V ±%10
		DC	85-300V ±%10	85-300V ±%10	85-300V ±%10	85-300V ±%10
	Frequency		45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz





			
ANC-32 (24V AC/DC, 24-50VAC/DC p.s.)	ANC-32 (48V AC/DC, 24-50VAC/DC p.s.)	ANC-32 (110V AC/DC, 24-50VAC/DC p.s.)	ANC-32 (220V AC/DC, 24-50VAC/DC p.s.)
Alarm annunciator	Alarm annunciator	Alarm annunciator	Alarm annunciator
604675	604676	604677	604678
24V	48V	110V	220V
24V	48V	110V	220V
45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz
32	32	32	32
25 ± 10 msec	25 ± 10 msec	25 ± 10 msec	25 ± 10 msec
Relay	Relay	Relay	Relay
2	2	2	2
1 NO (SPST)	1 NO (SPST)	1 NO (SPST)	1 NO (SPST)
5A/277V; 1385 VA	5A/277V; 1385 VA	5A/277V; 1385 VA	5A/277V; 1385 VA
5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W	5A/30VDC; 150W
≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations	≥ 10 <sup>8</sup> operations
1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)	1×10 <sup>5</sup> (5A@250VAC)
32	32	32	32
Red/Green selectable	Red/Green selectable	Red/Green selectable	Red/Green selectable
15,3x11,9	15,3x11,9	15,3x11,9	15,3x11,9
With 2pcs. leds or 2 pcs. green led	With 2pcs. leds or 2 pcs. green led	With 2pcs. leds or 2 pcs. green led	With 2pcs. leds or 2 pcs. green led
60 Flash/Min	60 Flash/Min	60 Flash/Min	60 Flash/Min
180 Flash/Min	180 Flash/Min	180 Flash/Min	180 Flash/Min
Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.
Available	Available	Available	Available
Available	Available	Available	Available
0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable	0, 2, 5, 10, 15, 20, 25, 30 adjustable
4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)	4 nos.(Horn, Ack, Delete, Test)
Available	Available	Available	Available
Modbus-RTU	Modbus-RTU	Modbus-RTU	Modbus-RTU
1200-57600	1200-57600	1200-57600	1200-57600
2500 Vrms	2500 Vrms	2500 Vrms	2500 Vrms
6080 logs	6080 logs	6080 logs	6080 logs
> 5 years	> 5 years	> 5 years	> 5 years
24-50V ±%10	24-50V ±%10	24-50V ±%10	24-50V ±%10
24-50V ±%10	24-50V ±%10	24-50V ±%10	24-50V ±%10
45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz



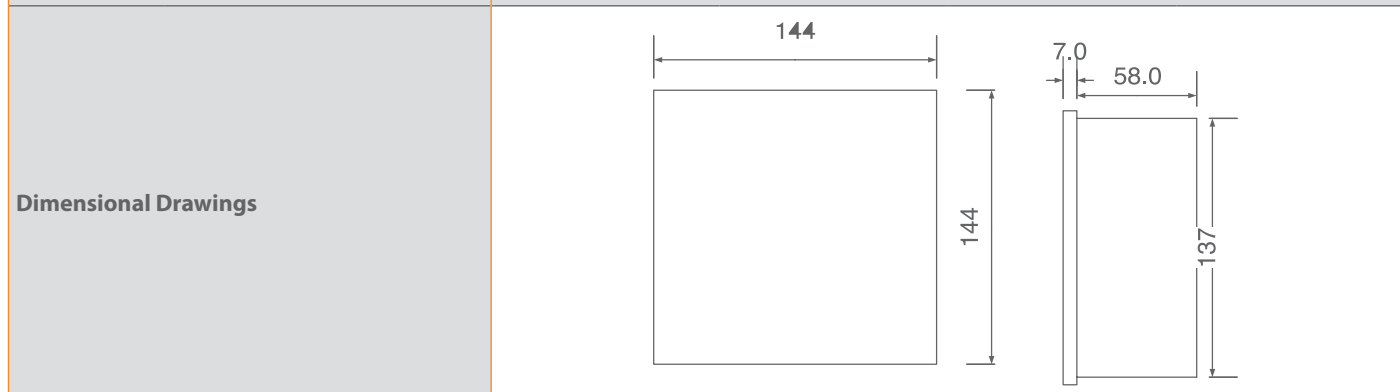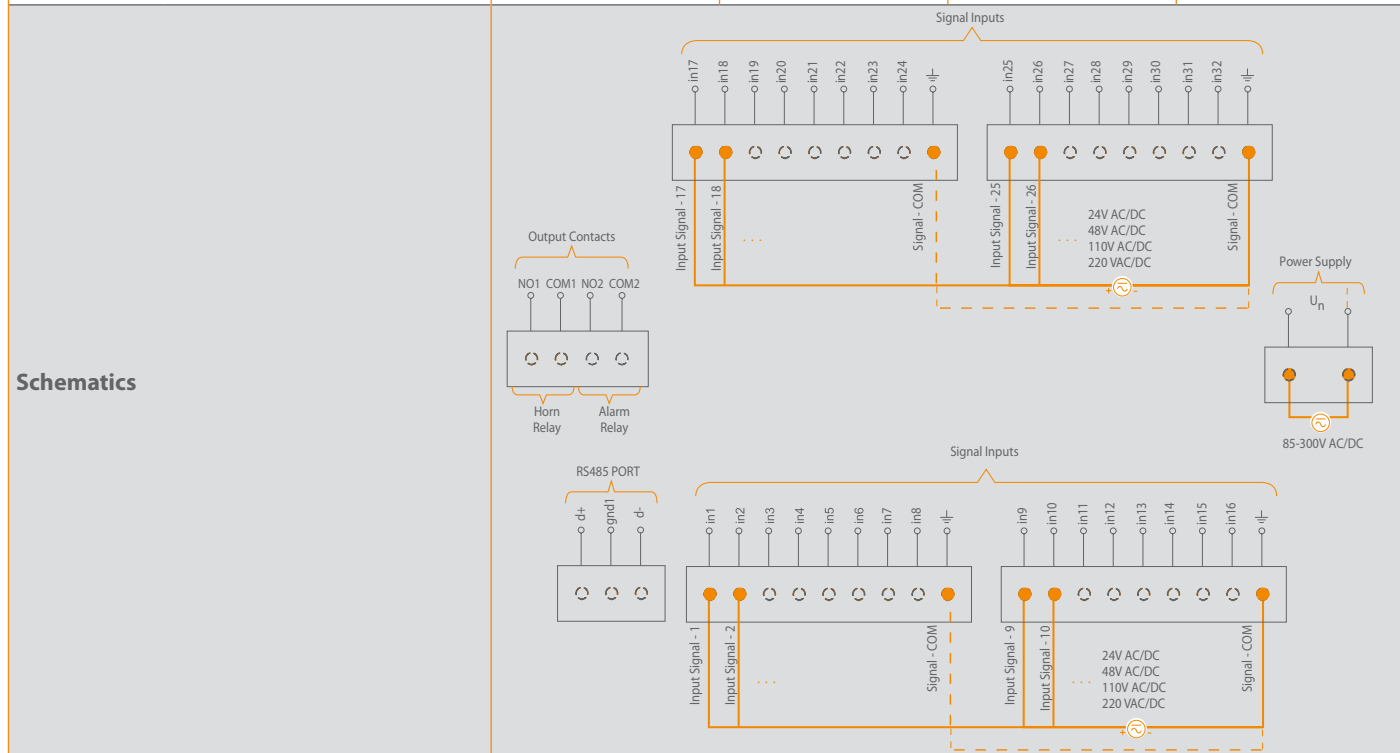


Type		ANC-32 (24V AC/DC, 85-300V AC/DC p.s.)	ANC-32 (48V AC/DC, 85-300V AC/ DC p.s.)	ANC-32 (110V AC/DC, 85-300V AC/ DC p.s.)	ANC-32 (220V AC/DC, 85-300V AC/ DC p.s.)
Power consumption	DC	< 10VA	< 10VA	< 10VA	< 10VA
	AC	<5W	<5W	<5W	<5W
Permissible ambient temperature	During operation	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
	During storage	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Relative Humidity		Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
Degree of protection		IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)
Connections		Screw terminal	Screw terminal	Screw terminal	Screw terminal
Dimensions (mm)	Bezel/Overall	Height(mm)	144	144	144
		Width(mm)	144	144	144
	Panel Cutout	Height(mm)	137	137	137
		Width(mm)	137	137	137
Weight(gr)		540	540	540	540



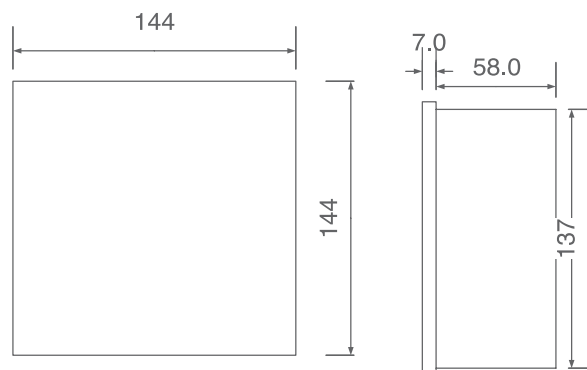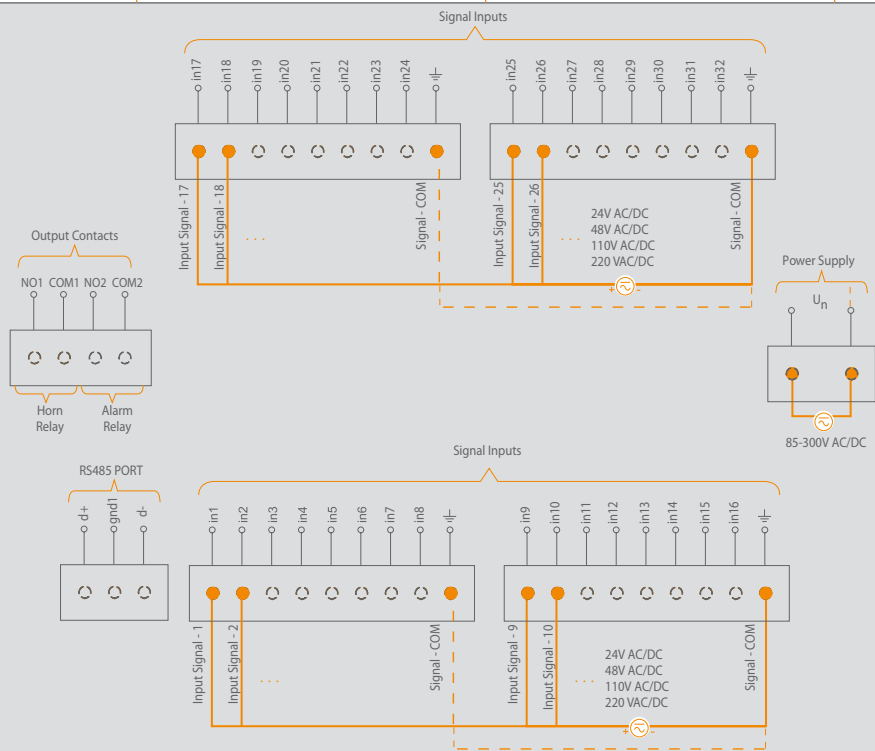








ANC-32 (24V AC/DC, 24-50VAC/ DC p.s.)	ANC-32 (48V AC/DC, 24-50VAC/ DC p.s.)	ANC-32 (110V AC/DC, 24-50VAC/ DC p.s.)	ANC-32 (220V AC/DC, 24-50VAC/ DC p.s.)
< 10VA	< 10VA	< 10VA	< 10VA
<5W	<5W	<5W	<5W
-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)
Screw terminal	Screw terminal	Screw terminal	Screw terminal
144	144	144	144
144	144	144	144
137	137	137	137
137	137	137	137
58	58	58	58
540	540	540	540




							
Type			LSK-4 (24VAC/DC)	LSK-4 (48VAC/DC)	LSK-4 (110VAC/DC)	LSK-4 (220VAC/DC)	LSK-6 (24VAC/DC)
Definiton			Signal Indicator Module	Signal Indicator Module	Signal Indicator Module	Signal Indicator Module	Signal Indicator Module
Order Number			583041	583042	583043	583045	583061
Input Signal	Voltage	AC	24V	48V	110V	220V	24V
		DC	24V	48V	110V	220V	24V
	Frequency		Min. 45Hz (for AC signal input)	Min. 45Hz (for AC signal input)	Min. 45Hz (for AC signal input)	Min. 45Hz (for AC signal input)	Min. 45Hz (for AC signal input)
	Numbers		4	4	4	4	6
Response Time:		Max. 10ms	Max. 10ms	Max. 10ms	Max. 10ms	Max. 10ms	
Output Contacts			-	-	-	-	-
Window	Numbers		4	4	4	4	6
	Colours		Red	Red	Red	Red	Red
	Sizes(mm)		34,85 x 30	34,85 x 30	34,85 x 30	34,85 x 30	34,85 x 18,70
	Illuminating for each window		With 9 pcs. red leds	With 9 pcs. red leds	With 9 pcs. red leds	With 9 pcs. red leds	With 6 pcs. red leds
	Marking		Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.
Time Range(sec)			-	-	-	-	-
Inbuilt Push Buttons			-	-	-	-	-
Buzzer			-	-	-	-	-
Communication			-	-	-	-	-
Real Time Event Recording			-	-	-	-	-
Battery Life			-	-	-	-	-
Permissible ambient temperature	During operation		-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C
	During storage		-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C
Relative Humidity			Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
Degree of protection			IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)
Connections			Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal




						
<b>LSK-6 (48VAC/DC)</b>	<b>LSK-6 (110VAC/DC)</b>	<b>LSK-6 (220VAC/DC)</b>	<b>LSK-9 (24VAC/DC)</b>	<b>LSK-9 (48VAC/DC)</b>	<b>LSK-9 (110VAC/DC)</b>	<b>LSK-9 (220VAC/DC)</b>
Signal Indicator Module	Signal Indicator Module	Signal Indicator Module	Signal Indicator Module	Signal Indicator Module	Signal Indicator Module	Signal Indicator Module
583062	583063	583065	583091	583092	583093	583095
48V	110V	220V	24V	48V	110V	220V
48V	110V	220V	24V	48V	110V	220V
Min. 45Hz (for AC signal input)	Min. 45Hz (for AC signal input)	Min. 45Hz (for AC signal input)	Min. 45Hz (for AC signal input)	Min. 45Hz (for AC signal input)	Min. 45Hz (for AC signal input)	Min. 45Hz (for AC signal input)
6	6	6	9	9	9	9
Max. 10ms	Max. 10ms	Max. 10ms	Max. 10ms	Max. 10ms	Max. 10ms	Max. 10ms
-	-	-	-	-	-	-
6	6	6	9	9	9	9
Red	Red	Red	Red	Red	Red	Red
34,85 x 18,70	34,85 x 18,70	34,85 x 18,70	20,9 x 18,7	20,9 x 18,7	20,9 x 18,7	20,9 x 18,7
With 6 pcs. red leds	With 6 pcs. red leds	With 6 pcs. red leds	With 4 pcs. red leds	With 4 pcs. red leds	With 4 pcs. red leds	With 4 pcs. red leds
Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.	Laser printed onto standard tracing paper, using templates provided by Klemsan Inc.
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C
-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C
Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)	IP50(front), IP20(back) (IP66 with accessory)
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal

Type			LSK-4 (24VAC/DC)	LSK-4 (48VAC/DC)	LSK-4 (110VAC/DC)	LSK-4 (220VAC/DC)	LSK-6 (24VAC/DC)
Dimensions (mm)	Bezel/Overall	Height(mm)	96	96	96	96	96
		Width(mm)	96	96	96	96	96
	Panel Cutout	Height(mm)	89.5	89.5	89.5	89.5	89.5
		Width(mm)	89.5	89.5	89.5	89.5	89.5
		Depth(mm)	66	66	66	66	66
Weight(gr)			218	218	218	218	220

### Schematics



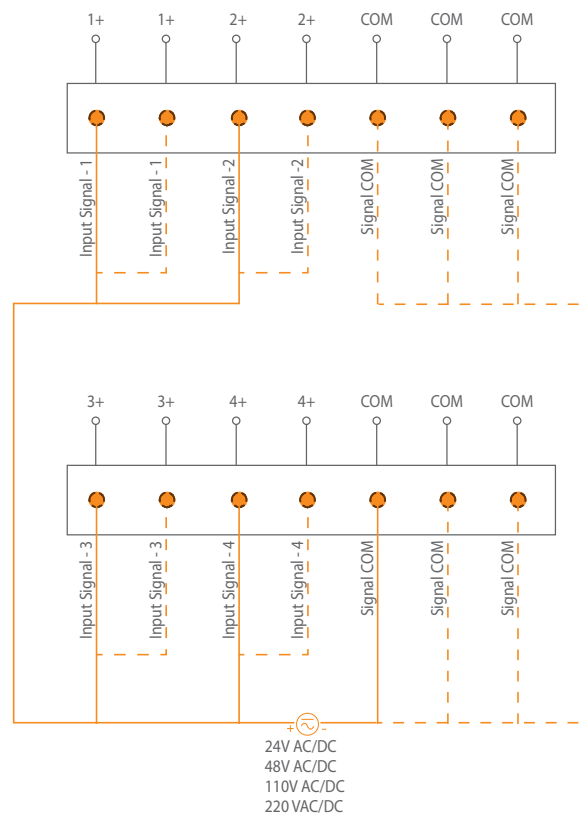


### Dimensional Drawings

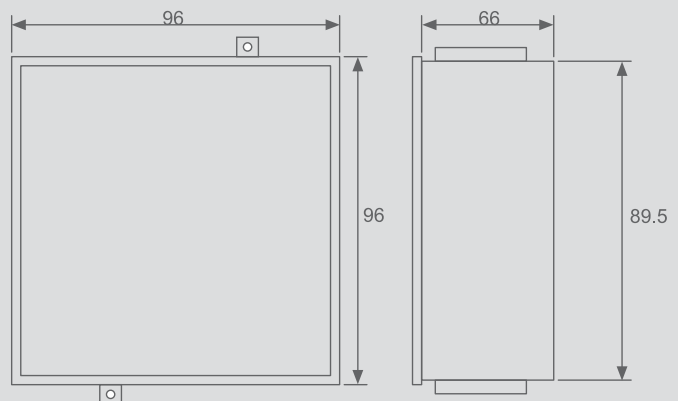



LSK-6 (48VAC/DC)	LSK-6 (110VAC/DC)	LSK-6 (220VAC/DC)	LSK-9 (24VAC/DC)	LSK-9 (48VAC/DC)	LSK-9 (110VAC/DC)	LSK-9 (220VAC/DC)
96	96	96	96	96	96	96
96	96	96	96	96	96	96
89.5	89.5	89.5	89.5	89.5	89.5	89.5
89.5	89.5	89.5	89.5	89.5	89.5	89.5
66	66	66	66	66	66	66
220	220	220	222	222	222	222

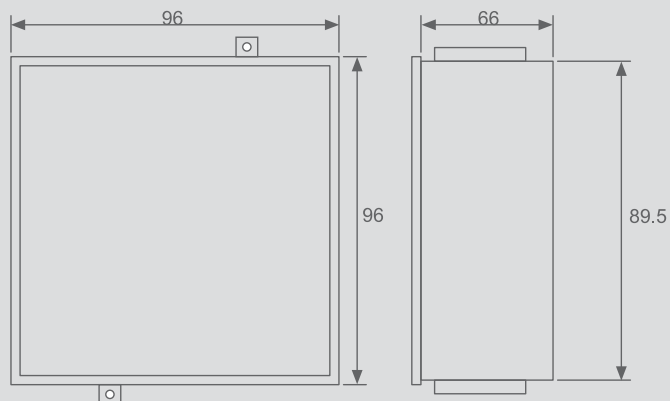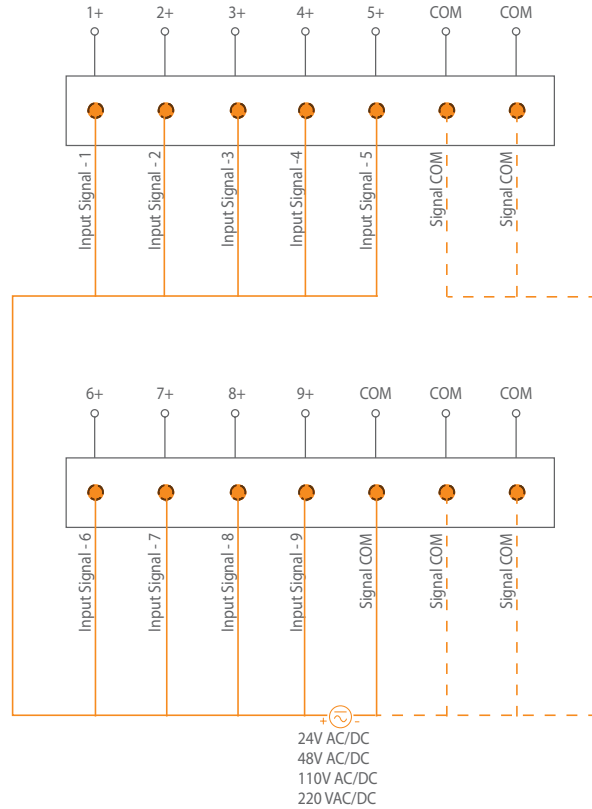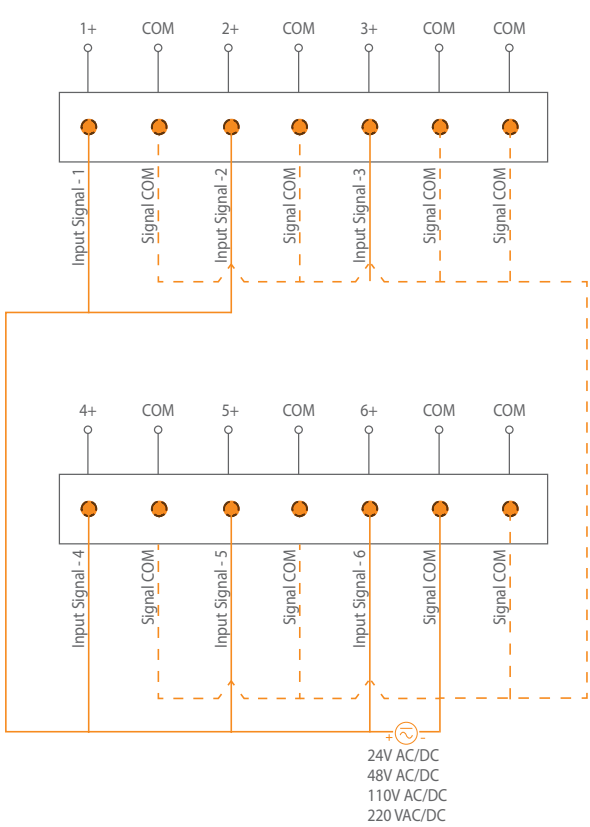

There are 4 kinds of flashing of LED displays; fast blinking, slow blinking, continuously flashing (turn on continuously) and turn off.

For ANC8 the first alarm / for ANC16 the first or the last alarm (depending on setting) display blinks faster than the remaining channel displays which also have an alarm condition.

Assume there is an alarm in the 3rd channel. Third channel's display will blink fast. After a while, assume that there appear alarms in 7th, 8th and 9th channels. Then third channel will blink fast; seventh, eighth and ninth displays will blink slowly.

When the operator presses on the "Ack" button, all the channels (only the 3rd channel other channels already blink slowly) will blink slowly and also the related relay(s) deactivate(s) (horn and/or alarm relay – depending on the setting). After that; if alarm conditions disappear, slow blinking channels will flash continuously (LEDs turn on continuously). In the above condition, when the operator presses "Del" button; all the continuously flashing displays will turn off.

**e.g.**

Input-1 is adjusted as horn(green) window and input-2 is adjusted as alarm(red) window in below figure.

When related signal is applied to first input channel, it will blink fastly in green colour in order to indicate first alarm. When related signal is applied to second channel, it blinks slowly in red colour.

If ACK(acknowledge) button is pressed, Horn and Alarm relay are de-activated. After pressing ACK button, if one of input signal is gone; it will blink constantly, otherwise it blinks slowly.

If Horn button is pressed, the buzzer will stop. Functional diagram is shown in below figure.





ALRC-6 series / Signal Control

Whenever any ALRC-6 input is excited, relay of that channel and horn relay are activated. If the related dip-switch (Alarm Relay Enable switch on the rear cover) is adjusted as ON, "alarm relay" will also be activated. If input signal is continued, display of the related channel blinks. If input signal is disconnected, display will be turned on continuously.

When HORN button is pressed, the HORN relay will be inactive. When a 'new' input signal is applied to any of the inputs, HORN relay will again be active.


When DEL button is pressed, relays of the channels whose input signals are interrupted will be inactive and displays of these channels will turn-off. For the channels whose input signals are continued, displays and relays maintain their initial state, as described above (relay active, display blinking).

When TEST button is pressed, displays of all channels will flash. This button has no effect on channel relays.

**e.g.**

Dip switch-3 is adjusted as "ON" and Dip switch-4 is adjusted as "OFF" in below figure.


FUNCTIONAL INDICATION

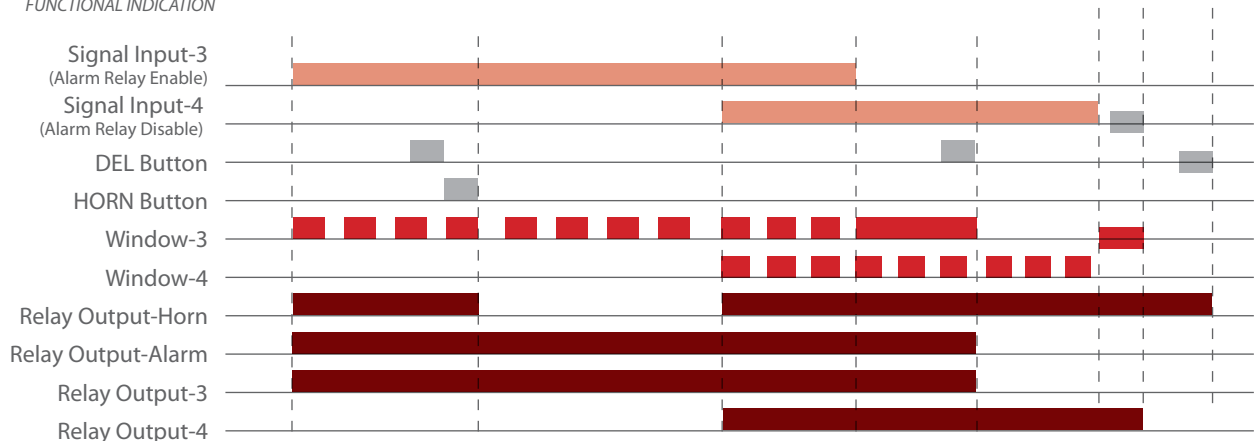

LSK series/ Signal Visualizing

When input signal is applied to input channel of LSK series, related window is turned on constantly in red colour. When the signal is gone, related window is turned off.

FUNCTIONAL INDICATION

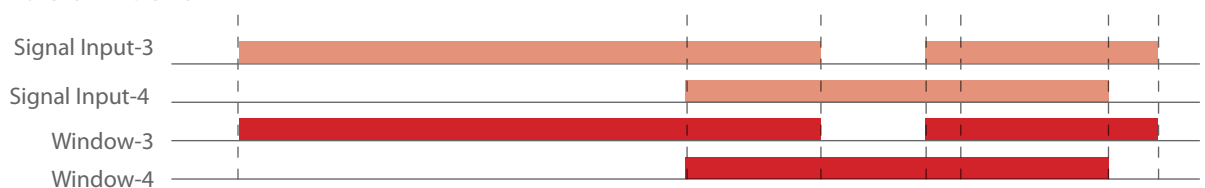





# Analog Signal Management Solutions



*Isolation with  
— accurate  
conversion*

## Defining a transducer in simple terms

---

Transducers are devices that convert measured analog signal values into other analog signal values in industrial and process automation.

It provides conversion of main electrical parameters into a voltage or mA output and isolation between inputs and outputs.

---

## In which fields are they most commonly used?

---

Measuring  
Converting  
Protection  
Isolation  
Configuration

A transducer **measures** input parameters and **converts** them to another signal form continuously.

Input, output and power supply(optional) are electrically isolated from one another in order to provide **protective isolation**.

It is possible to **configure** different input ranges and output types by means of adjustment knobs.

---

## In which fields are they most commonly used?

---

- Renewable Energy
  - Medium motors
  - Electric power plants and substations
  - Telecontrol systems
  - Industrial Process
  - Energy management systems
  - Medium voltage modular cabinets
  - Control and safety systems
  - Telecontrol systems
-




## Benefits and Advantages

- Extended measuring range
- Excellent linearity
- High system safety and reliability
- Electrical isolation with a high test voltage
- No insertion losses
- Low residual noise
- Good overall accuracy
- High quality, long useful life
- Easy configuration with knobs
- Without power supply option
- Extended temperature input range
- Multiplying analog signal (1 in-2 outs)
- DC and AC supply voltage options
- Highly compact and light weight
- High Electromagnetic Compatibility (EMC) i.e. maximum immunity to interferences.
- Self-Extinguishing plastic housing.

## Layout & Mounting

Klemsan transducers are suitable for plug-in assembly onto 35mm standard DIN rails.

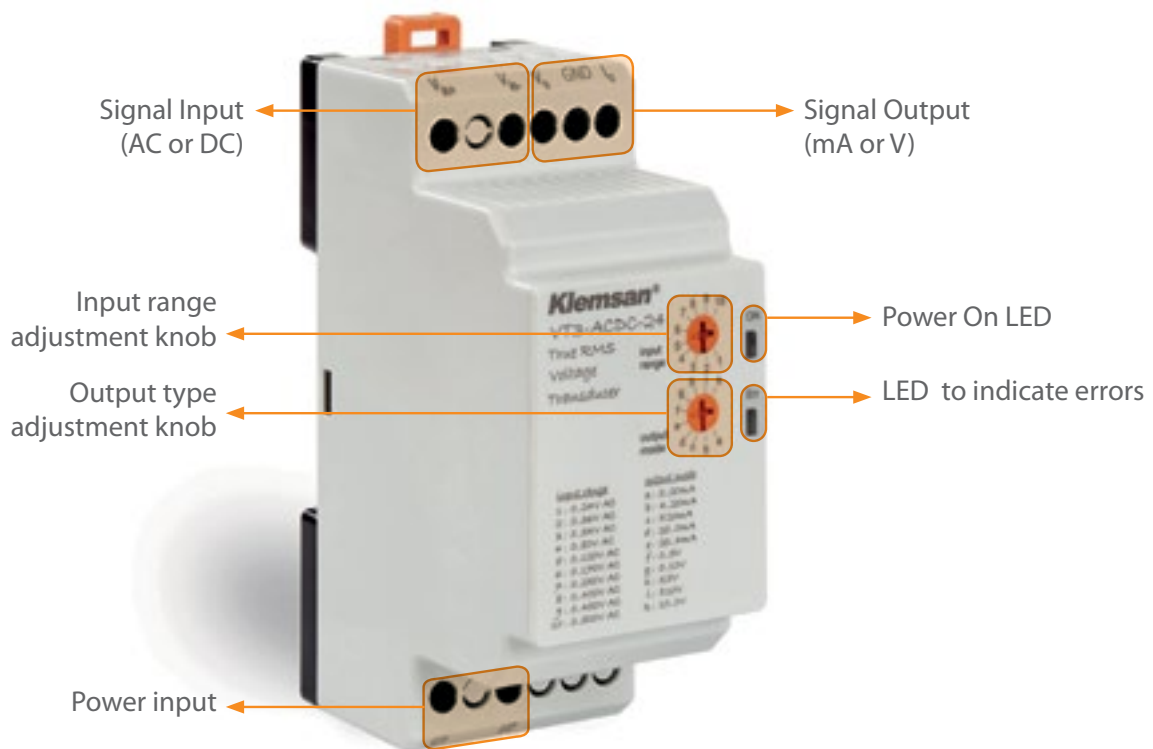

**VT3-ACDC-24 Transducer**

## Renewable Energy



Measuring current and voltage in order to help the windmills and solar installations to work at their maximum efficiency.



**SIGNAL  
CONVERTING**  
VT3-ACDC-24

## Petrochemical processing



The measurement of temperature is a vital part of instrumentation in petrochemical industries. RTD sensors are often used for their excellent temperature response. They are used in order to combine sensors with PLC/Scada system.



**SIGNAL  
CONVERTING**  
TT-RTD series  
Ascon series

## UPS Voltage Control



Inverter output voltage for UPS systems can be monitored by scada system via voltage transducers.



**SIGNAL  
CONVERTING**  
VT3-ACDC-24

## I/O applications



Passive isolators are used for the electrical isolation and converting of analog 0(4) to 20 mA standard current signals to 0-20mA, 4-20mA, 0-5V and 0-10V signals. They provide electrical isolation between the control electronics and process I/O and eliminate measurement errors caused by differences in earth potentials.



**SIGNAL  
ISOLATING**  
PISO-DC series



## Substation Automation



Measuring conversion voltage and current, and integrating them with SCADA and RTU system.



**SIGNAL CONVERTING**  
CT3 & VT3 series  
Ascon 311

## Refrigeration applications



Cold chain products such as fresh meat and dairy products require safe environmental storage conditions. So accurate measurement of low temperature is crucial. TT-RTD can measure down to  $-50^{\circ}\text{C}$  and offer a convenient solution.



**SIGNAL CONVERTING**  
TT-RTD series  
Ascon321- Ascon 331

## Elevators



With higher accuracy and speed, the feedback signal from transducers enables smoother control and reduction of energy consumption in electrical systems.



**SIGNAL CONVERTING**  
CT3 series

## On Board Automation for Railways



The electrical power is supplied to the trains via the catenaries. So, depending on the train type such as subway, trolleybuses, high speed or heavy duty trains, the locomotives can operate at different voltage levels. In order to monitor them in main panel, voltage transducers are used.



**SIGNAL CONVERTING**  
VT3 series  
Ascon 311

## Scada System



The rms value of the input AC voltage or current can be converted to a DC output which is connected to analog input of PLC module. So it is possible to monitor them by Scada System.



**SIGNAL CONVERTING**  
CT3 & VT3 series  
Ascon series

## Air conditioning and liquid temperature measurement



RTDs provide wide temperature input range from -50°C to +300°C in order to keep an industrial process in desired degree with accuracy and stability.



**SIGNAL  
CONVERTING**  
TT-RTD series

## Air Conditioning System



Monitoring of lower voltage levels and heavy load control with PLC modules.



**PROTECTION**  
CT3 & VT3 series

## Motor Traction Control



Traction is provided by electric motors driven by inverters that are relying on transducers to measure, optimize and adjust the current and voltage that are sent to the motors, improving both performance and reliability.




**PROTECTION**  
CT3 & VT3 series





## Space-critical multi-channel applications

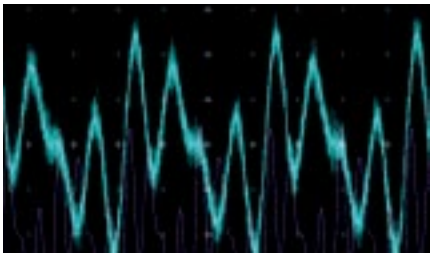

Providing two signal outputs for different control units thanks to 1-in 2-out converting feature. No auxiliary power supply is required for PISO series therefore cost savings are made.



**SIGNAL  
MULTIPLYING**  
*PISO-DC-DUO series*

## Tele-Control System



Providing an intelligent analog output module for the direct measurement of alternating variables for the use in station control applications.



**SIGNAL  
CONVERTING**  
*CT3 & VT3 series*










Type		ASCON 311	ASCON 321
<b>Definiton</b>		Configurable Signal Converter	Configurable PT100 Converter
<b>Order Number</b>		602300	602310
<b>Casing Width(mm)</b>		17,5	17,5
<b>Connections</b>		Screw terminal	Screw terminal
<b>Input</b>	Sensor Type	DC Current and Voltage(mV,V,mA)	PT100 (2,3,4 wire)
	PT100 connection Type	-	2, 3 or 4 wire
	Measuring Range	0...60mV    -6...60mV    0...5mA 0...100mV   -100...100mV   0...10mA 0...250mV   -250...250mV   0...20mA 0...500mV   -500...500mV   -5...5mA 0...1V       -1...1V           -10...10mA 0...2V       -2...2V           -20...20mA 0...2,5V     -2,5...2,5V       4...20mA 0...5V       -5...5V            0...24mA 0...10v      -10...10V        4...24mA 0...20V      -20...20V        0...12mA	-150°C...800 °C Configurable
	Sensor excitation current	-	<0.5mA
	Maximum input signal	30V DC or 50mA DC	-
	<b>Output</b>	Output Signal	0...5V    0...20mA 5...0V    20...0mA 0...10V   4...20mA 10...0V   20...4mA -5...5V   -20...20mA
	Measurement Error	< %0.2 Full scale	< %0.2 Full scale
	Max. Load	≤ 600Ω(Current Output) ≥ 10kΩ (Voltage Output)	≤ 600Ω(Current Output) ≥ 10kΩ (Voltage Output)
	Max. Output Signal	12V (Voltage Output) 24mV (Current Output)	12V (Voltage Output) 24mV (Current output)
<b>Supply</b>	Voltage	DC	11-30V DC
<b>Isolation</b>		3 way-1,5kV RMS	3 way-1,5kV RMS
<b>Power Consumptionr</b>		≤ 25mA @ 24V (ILOAD =0mA, I =0mA)	≤ 25mA @ 24V (ILOAD =0mA, I =0mA)
<b>Temperature coefficient</b>		≤ %0.004/°C	≤ %0.02/°C






ASCON 331	ASCON 341	ASCON 352
Configurable Thermocouple Converter	Configurable Frequency Converter	Signal-Temperature Converter with RS485
602320	602 330	602400
17,5	17,5	17,5
Screw terminal	Screw terminal	Screw terminal
Thermocouple( J,K,E,R,S)	2-3 wire PNP/NPN, Namur, Push-Pull, Dry contact	mV,V,mA PT100(2,3,4wire) Thermocouple(J,K,E,R,S)
-	-	2,, 3 or 4 wire
J: -200°C ... 1200°C configurable K: -200°C ... 1350°C configurable E: -200°C ... 950°C configurable R: -50°C ... 1750°C configurable S: -50°C ... 1750°C configurable	0 .. 100 kHz configurable via knobs 0...150 kHz can be learned from input signal	<b>Signal</b> -30 signal combinations; 4-20mA,0-10V,etc.  <b>PT100</b> -150°C...800 °C Configurable  <b>Thermocouple</b> J: -200°C ... 1200°C configurable K: -200°C ... 1350°C configurable E: -200°C ... 950°C configurable R: -50°C ... 1750°C configurable S: -50°C ... 1750°C configurable
-	-	<0,5mA
-	Namur: 1.7 mA NPN: 6.5 V PNP: 6,7 V	30V DC or 50mA DC
0...5V 0...20mA 5...0V 20...0mA 0...10V 4...20mA 10...0V 20...4mA -5...5V -20...20mA	0 .. 5V, 0 .. 10V, -10 .. 10V, 0 .. 20mA, 4 .. 20mA, -20 .. 20mA	RS485
3.6mA .. 23.6mA	< %0.2 Full scale	3.6mA .. 23.6mA
< %0.2 Full scale	≤ 600Ω(Current Output) ≥10kΩ (Voltage Output)	< %0.1 Full scale
≤ 600Ω(Current Output) ≥10kΩ (Voltage Output)	12V (Voltage output), 24mA (Current output)	-
11-30V DC	18 .. 30V DC	11-30V DC
3 way-1,5kV RMS	1,5kVRMS	3 way-1,5kV RMS
≤ 25mA @ 24V (ILOAD =0mA, I =0mA)	≤ 30mA @ 24V (I LOAD AUX =0mA, I =0mA)	≤ 15mA @ 24V (ILOAD =0mA)
≤ %0.004/°C	≤ %0.004/°C	≤ %0.02/°C

Type		ASCEN 311	ASCEN 321								
<b>Response Time</b>		< 150ms	< 150ms								
<b>Sensor failure indication</b>		<table border="1"> <tr> <td>Failure Status</td> <td>LED Indication</td> </tr> <tr> <td>The situation of input signal is at least 10 % different than adjusted value</td> <td>Err: </td> </tr> </table>	Failure Status	LED Indication	The situation of input signal is at least 10 % different than adjusted value	Err: 	<table border="1"> <tr> <td>Failure Status</td> <td>LED Indication</td> </tr> <tr> <td>The situation of input signal is at least 10 % different than adjusted value</td> <td>Err: </td> </tr> </table>	Failure Status	LED Indication	The situation of input signal is at least 10 % different than adjusted value	Err: 
Failure Status	LED Indication										
The situation of input signal is at least 10 % different than adjusted value	Err: 										
Failure Status	LED Indication										
The situation of input signal is at least 10 % different than adjusted value	Err: 										
<b>Protection</b>		Over voltage and reverse polarity protection	Over voltage and reverse polarity protection								
<b>Connections</b>	Power Input	DC+,DC-	DC+,DC-								
	Input Connection	mV Input : 2(+), 3(-) V Input : 4(+), 1(-) mA Input : 3(+), 1(-)	P1+ and P1- (2 wire connection) P1+ and P1-,P2- (3 wire connection) P1+,P2- and P1+,P2- (4 wire connection)								
	Output Connection	V,Gnd (Voltage Output) I,Gnd (Current Output)	V,Gnd (Voltage Output) I,Gnd (Current Output)								
<b>Communication</b>	Protocol	-	-								
	Serial Connection	-	-								
	Baud Rate	-	-								
	Parity	-	-								
<b>Permissible ambient temperature</b>	During Operation	-20 to +60 °C	-20 to +60 °C								
	During Storage	-40 to +75 °C	-40 to +75 °C								
<b>Relative Humidity</b>		Max.95% (no condensation)	Max.95% (no condensation)								
<b>Degree of protection</b>		IP20	IP20								
<b>Weight(gr)</b>		42	42								
<b>Mounting Type</b>		Rail mounted	Rail mounted								
<b>Permissible mounting position</b>		any	any								

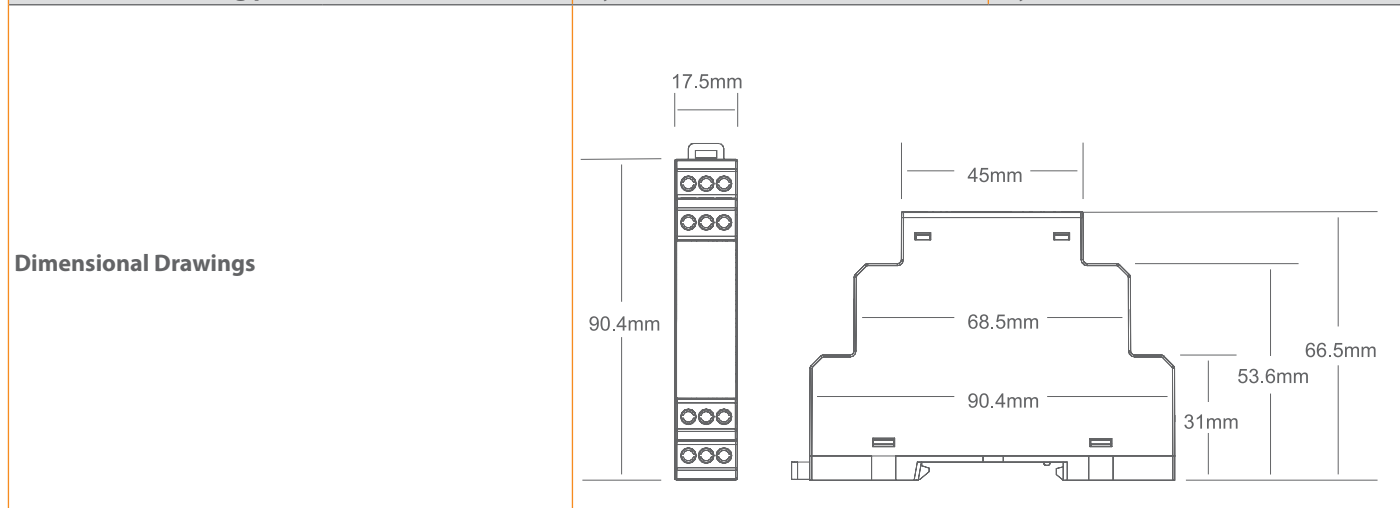




ASCN 331	ASCN 341	ASCN 352								
< 150ms	0 - 20 Hz: < 1050 msec 20 - 100 Hz: < 550 msec 100 Hz: < 300msec	<10ms								
<table border="1"> <tr> <th>Failure Status</th> <th>LED Indication</th> </tr> <tr> <td>The situation of input signal is at least 10 % different than adjusted value</td> <td>Err: </td> </tr> </table>	Failure Status	LED Indication	The situation of input signal is at least 10 % different than adjusted value	Err:	M1 M2 leds indication combinations	<table border="1"> <tr> <th>Failure Status</th> <th>LED Indication</th> </tr> <tr> <td>Voltage output mode: short circuit</td> <td>Err: </td> </tr> </table>	Failure Status	LED Indication	Voltage output mode: short circuit	Err:
Failure Status	LED Indication									
The situation of input signal is at least 10 % different than adjusted value	Err:									
Failure Status	LED Indication									
Voltage output mode: short circuit	Err:									
Over voltage and reverse polarity protection	Over voltage and reverse polarity protection	Over voltage and reverse polarity protection								
DC+,DC-	DC+,DC-	DC+,DC-								
TC1+ and TC1-	<b>PNP</b> : 4(+), 2(-), Sensor Supply : 1 or external <b>NPN</b> : 3(+), 2(-), Sensor Supply : 1 or external <b>Namur</b> : 3(+), 2(-) <b>Push Pull</b> : 4(+), 2(-) <b>Dry Contact</b> : 4(+), Sensor Supply : 1	<b>Signal</b> mV Input : 2(+), 3(-) mA Input : 3(+), 1(-) V Input : 4(+), 1(-)  <b>PT100</b> 4 and 3 (2 wire connection) 4 and 2,3(3wire connection) 1,4and2,3(4wireconcnction)  <b>Thermocouple</b> TC connection: 4,5								
V,Gnd (Voltage Output) I,Gnd (Current Output)	V,Gnd (Voltage Output) I,Gnd (Current Output)	D+, Gnd, D-								
-	-	MODBUS RTU								
-	-	RS485								
-	-	1200 9600 57600 2400 19200 4800 38400(Default)								
-	-	None(Default) Even Odd								
-20 to +60 °C	-20 to +60 °C	-20 to +60 °C								
-40 to +75 °C	-40 to +75 °C	-40 to +75 °C								
Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)								
IP20	IP20	IP20								
42	42	42								
Rail mounted	Rail Mounted	Rail mounted								
any	any	any								

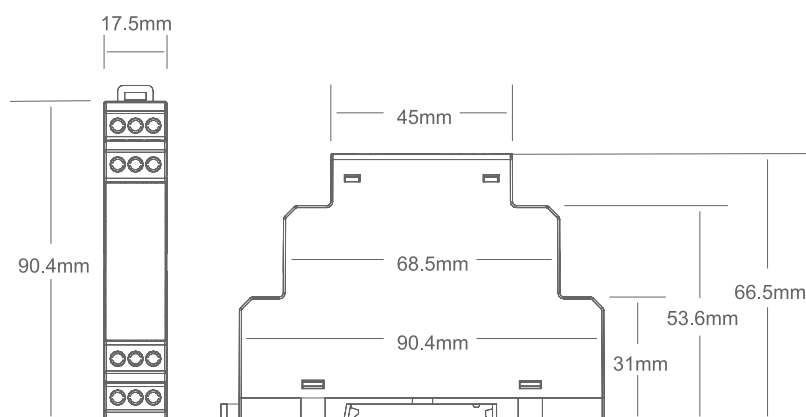

# Function Diagrams

## ASCON 311 / Converting


### ISOLATION

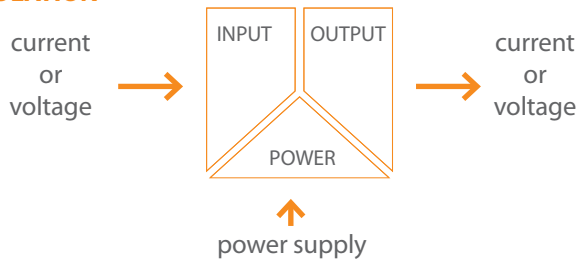

ASCON 311 measures Current/ Voltage and converts it to an industry standard output signal which is directly proportional to the measured input. These transducers provide an output which is load independent and isolated from the input. Input range and output type must be adjusted before using them.

## ASCON 321 / Converting


### ISOLATION

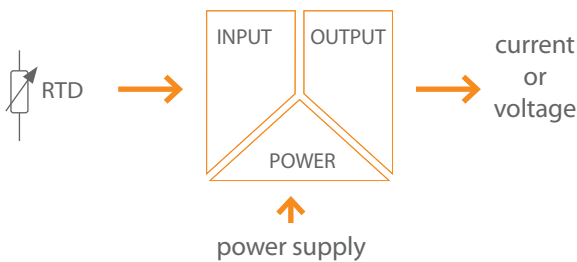

RTD's provide wide temperature input range from -150°C to +800°C when accuracy and stability are a requirement of the customer's specification in an industrial process in order to keep it in desired degree.

## ASCON 331 / Converting


### ISOLATION

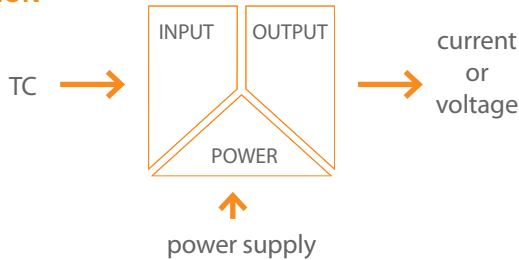

Measurement of temperature is a vital part of instrumentation in petrochemical industries, heating systems, refrigerating applications etc. Thermocouple sensors are often used for their excellent temperature response. ASCON 331 presents best solution with combining TC sensors with PLC/ Scada system.

## ASCON 341 / Converting


### ISOLATION

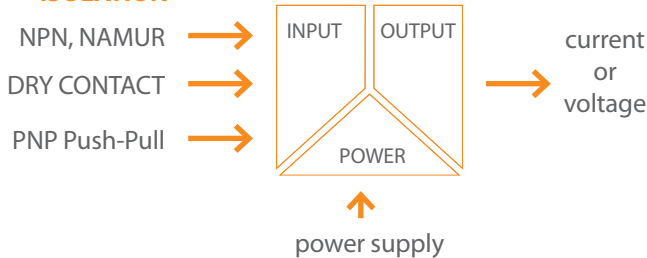

Frequency converters convert frequency into analogue standard signals. The configurable frequency transducer is suitable for the connection of 2-3 wire PNP/NPN, Namur, Push-Pull, Dry contact sensors. ASCON 341 has screw connection and standard configuration.

## ASCON 352 / Signal-Temperature Converting / RS485 Communication

### ISOLATION

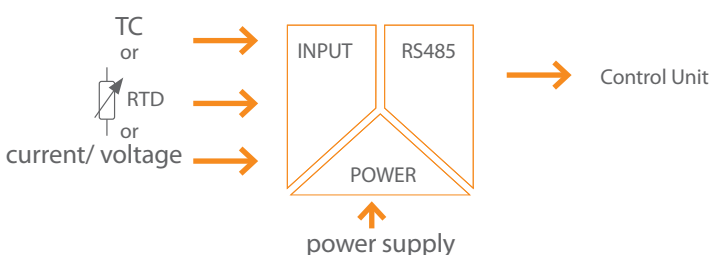

ASCON 352 involves all input ranges which are indicated on above ASCON types. Measured values can be transmitted to a PC through serial communication so that real time analog signal monitoring without PLC analog card is possible.



Modbus RTU Descriptions

**Modbus Table**

<b>Input value</b>	40001	RO	32 bit float	03H
<b>Ambient temperature</b>	40003	RO	32 bit float	03H
<b>Input type</b>	40005	R/W	32 bit integer	03H / 10H
<b>Input type - option 1</b>	40007	R/W	32 bit integer	03H / 10H
<b>Input type - option 2</b>	40009	R/W	32 bit integer	03H / 10H
<b>Input type - option 3</b>	40011	R/W	32 bit integer	03H / 10H
<b>Baudrate</b>	40013	R/W	32 bit integer	03H / 10H
<b>Parity</b>	40015	R/W	32 bit integer	03H / 10H
<b>MODBUS slave ID</b>	40017	R/W	32 bit integer	03H / 10H
<b>Record value</b>	40019	R/W	32 bit integer	03H / 10H

**If Input type is "Voltage / Current"**

		Input type - option 1		
		0, 1, 2	3, 4, 5, 6	7, 8, 9
Input Type option 2	0	0.. 60mV	-60.. 60mV	0.. 5mA
	1	0.. 100mV	-100.. 100mV	0.. 10mA
	2	0.. 250mV	-250.. 250mV	0.. 20mA
	3	0.. 500mV	-500.. 500mV	-5.. 5mA
	4	0.. 1V	-1.. 1V	-10.. 10mA
	5	0.. 2V	-2.. 2V	-20.. 20mA
	6	0.. 2.5V	-2.5.. 2.5V	4.. 20mA
	7	0.. 5V	-5.. 5V	0.. 24mA
	8	0.. 10V	-10.. 10V	4.. 24mA
	9	0.. 20V	-20.. 20V	0.. 12mA

"Input type -option 3" value must be a 9.

**If Input type is "PT100"**

Input type - option 1		
0, 1, 2	3, 4, 5, 6	7, 8, 9
PT100-2W	PT100-3W	PT100-4W

"Input type -option 2" value must be a 9.  
"Input type -option 3" value must be a 9.

**If Input type is "TC"**

Input type - option 1				
0, 1	2, 3	4, 5,	6,7	8, 9
J type TC	K type TC	E type TC	R type TC	S type TC

"Input type -option 2" value must be a 9.  
"Input type -option 3" value must be a 9.

Baudrate						
0	1	2	3	4	5	6
1200	2400	4800	9600	19200	38400	57600

Parity		
0	1	2
None	Even	Odd





Type		VT3-AC	VT3-AC-24	VT3-ACDC-24	
<b>Definiton</b>		True RMS Voltage Transducer	True RMS Voltage Transducer	True RMS Voltage Transducer	
<b>Order Number</b>		600101	600103	600106	
<b>Casing Width(mm)</b>		36	36	36	
<b>Connections</b>		Screw terminal	Screw terminal	Screw terminal	
<b>Input Signal</b>	Configurable Voltage range	0-24 VAC	Avaliable	Avaliable	Avaliable
		0-36 VAC	Avaliable	Avaliable	-
		0-54 VAC	Avaliable	Avaliable	Avaliable
		0-80 VAC	Avaliable	Avaliable	-
		0-120 VAC	Avaliable	Avaliable	Avaliable
		0-170 VAC	Avaliable	Avaliable	-
		0-250 VAC	Avaliable	Avaliable	Avaliable
		0-400 VAC	Avaliable	Avaliable	-
		0-450 VAC	Avaliable	Avaliable	Avaliable
		0-500 VAC	Avaliable	Avaliable	-
		0-24 VDC	-	-	Avaliable
		0-54 VDC	-	-	Avaliable
		0-120 VDC	-	-	Avaliable
		0-250 VDC	-	-	Avaliable
	0-450 VDC	-	-	Avaliable	
	Configurable Current Range	0-1 AAC	-	-	-
		0-2 AAC	-	-	-
		0-3 AAC	-	-	-
		0-4 AAC	-	-	-
		0-5 AAC	-	-	-
Frequency		40-70 Hz	40-70 Hz	40-70 Hz	
Surge overload		< 2 x Uinput max. range (5 pulses 1s)	< 2 x Uinput max. range (5 pulses 1s)	< 2 x Uinput max. range (5 pulses 1s)	
Constant overload		Max. 600 V	Max. 600 V	Max. 600 V	
Input impedances		240 kΩ	240 kΩ	240 kΩ	
<b>Output</b>	Type	0-20 mA	Avaliable	Avaliable	Avaliable
		4-20 mA	Avaliable	Avaliable	Avaliable
		±20 mA	Avaliable	Avaliable	Avaliable
		20-0 mA	Avaliable	Avaliable	Avaliable
		20-4 mA	Avaliable	Avaliable	Avaliable
		0-5 V	Avaliable	Avaliable	Avaliable
		0-10 V	Avaliable	Avaliable	Avaliable
		±5 V	Avaliable	Avaliable	Avaliable
		± 10 V	Avaliable	Avaliable	Avaliable
		10-0 V	Avaliable	Avaliable	Avaliable
	Analog Output	Max. Current	24 mA	24 mA	24 mA
		Max. Voltage	12 V	12 V	12 V
		Max. Load	10kΩ(for voltage) / 600Ω(for current)	10kΩ(for voltage) / 600Ω(for current)	10kΩ(for voltage) / 600Ω(for current)



VT3-AC-LP	CT3-AC	CT3-AC-24	CT3-AC-LP
True RMS Voltage Transducer	True RMS Current Transducer	True RMS Current Transducer	True RMS Current Transducer
600105	600100	600102	600104
36	36	36	36
Screw terminal	Screw terminal	Screw terminal	Screw terminal
Avaliable	-	-	-
Avaliable	-	-	-
Avaliable	-	-	-
Avaliable	-	-	-
Avaliable	-	-	-
Avaliable	-	-	-
Avaliable	-	-	-
Avaliable	-	-	-
Avaliable	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	Avaliable	Avaliable	Avaliable
-	Avaliable	Avaliable	Avaliable
-	Avaliable	Avaliable	Avaliable
-	Avaliable	Avaliable	Avaliable
-	Avaliable	Avaliable	Avaliable
40-70 Hz	40-70 Hz	40-70 Hz	40-70 Hz
< 2 x Uinput max. range (5 pulses 1s)	20xin(100A) for 1 Sec.	20xin(100A) for 1 Sec.	20xin(100A) for 1 Sec.
Max. 600 V	10A(2x Rated IN)	10A(2x Rated IN)	10A(2x Rated IN)
240 kΩ	49.9 Ω (burden resistor)	49.9 Ω (burden resistor)	49.9 Ω (burden resistor)
-	Avaliable	Avaliable	-
Avaliable	Avaliable	Avaliable	Avaliable
-	Avaliable	Avaliable	-
-	Avaliable	Avaliable	-
-	Avaliable	Avaliable	-
-	Avaliable	Avaliable	-
-	Avaliable	Avaliable	-
-	Avaliable	Avaliable	-
-	Avaliable	Avaliable	-
-	Avaliable	Avaliable	-
-	Avaliable	Avaliable	-
24 mA	24 mA	24 mA	24 mA
-	12 V	12 V	-
10kΩ(for voltage) / 600Ω(for current)	10kΩ(for voltage) / 600Ω(for current)	10kΩ(for voltage) / 600Ω(for current)	10kΩ(for voltage) / 600Ω(for current)

# Selection & Ordering Guide




Type		VT3-AC	VT3-AC-24	VT3-ACDC-24
Supply	Voltage	AC	85-265V	-
		DC	85-265V	10-36V
	Frequency	40-70 Hz	-	-
Power consumption	DC	<1.5W	<1.5W	<1.5W
	AC	<4VA	<4VA	<4VA
Isolation		1.5 kVrms, 3-way	1.5 kVrms, 3-way	1.5 kVrms, 3-way
Test Voltage between input-output		4kV during 1 min	4kV during 1 min	4kV during 1 min
Linearity		<0.2%	<0.2%	<0.2%
Response Time		350 ms	350 ms	350 ms
Ripple		<80mV	<80mV	<80mV
Accuracy		< %0.2 (full scale, 25°C)	< %0.2 (full scale, °C)	< %0.2 (full scale, °C)
Temperature coefficient		150 ppm/°C	150 ppm/°C	150 ppm/°C
Permissible ambient temperature	During operation	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
	During storage	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Relative Humidity		Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
Degree of protection		IP20	IP20	IP20
Weight(gr)		84	76	70
Permissible mounting position		any	any	any

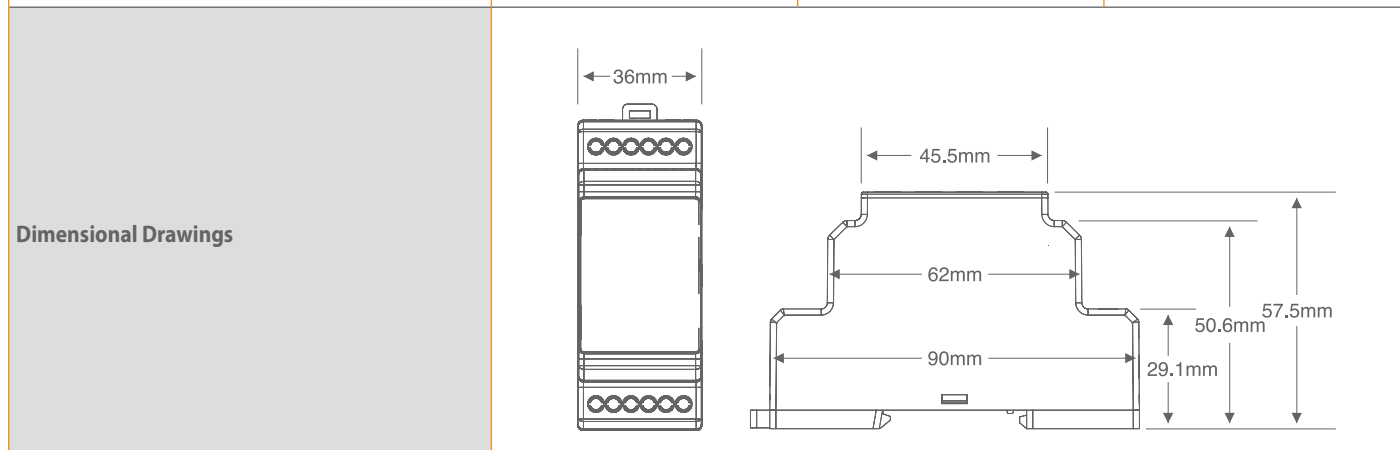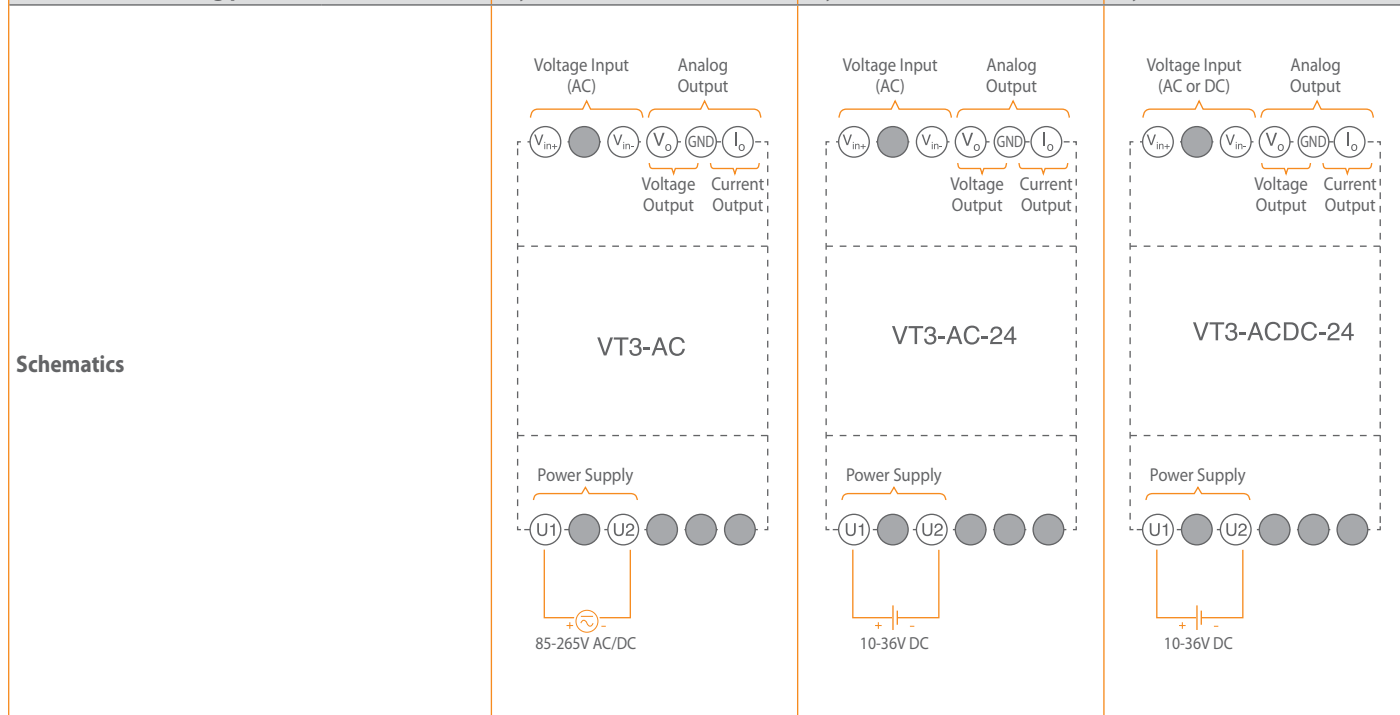







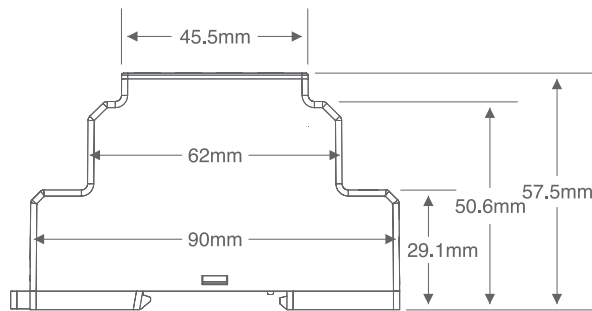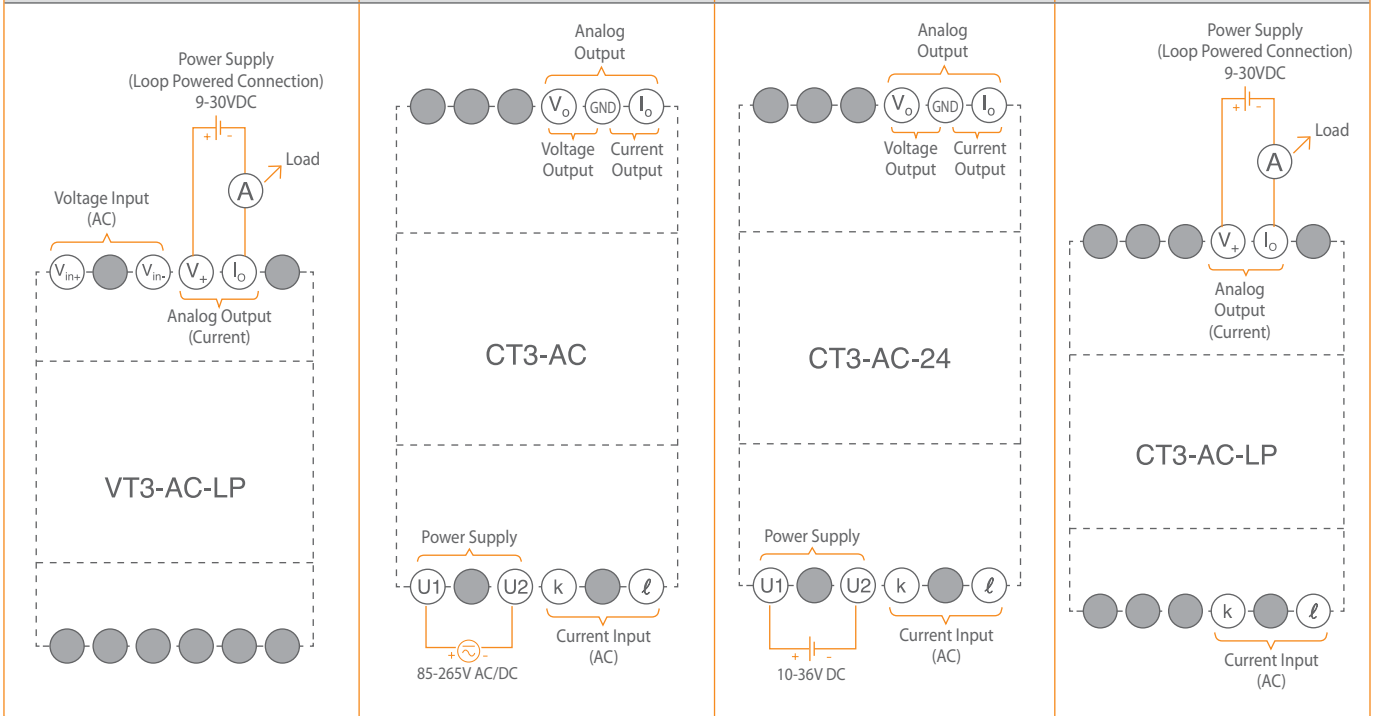





VT3-AC-LP	CT3-AC	CT3-AC-24	CT3-AC-LP
-	85-265V	-	-
9-30V	85-265V	10-36V	9-30V
-	40-70 Hz	-	-
<1.5W	<1.5W	<1.5W	<1.5W
<4VA	<4VA	<4VA	<4VA
1.5 kVrms, 2-way	1.5 kVrms, 3-way	1.5 kVrms, 3-way	1.5 kVrms, 2-way
4kV during 1 min	4kV during 1 min	4kV during 1 min	4kV during 1 min
<0.2%	<0.2%	<0.2%	<0.2%
350 ms	350 ms	350 ms	350 ms
<80mV	<80mV	<80mV	<80mV
< %0.2 (full scale, °C)	< %0.2 (full scale, °C)	< %0.2 (full scale, °C)	< %0.2 (full scale, °C)
150 ppm/°C	150 ppm/°C	150 ppm/°C	150 ppm/°C
-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
IP20	IP20	IP20	IP20
68	87	81	71
any	any	any	any










				
<b>Type</b>		TT-RTD-LP (-50 .. 100)	TT-RTD-LP (0 .. 100)	TT-RTD-LP (0 .. 150)
<b>Definiton</b>		Non-Isolated PT100 Transducer	Non-Isolated PT100 Transducer	Non-Isolated PT100 Transducer
<b>Order Number</b>		603860	603861	603862
<b>Casing Width(mm)</b>		17,5	17,5	17,5
<b>Connections</b>		Screw terminal	Screw terminal	Screw terminal
<b>Input</b>	Sensor Type	PT100	PT100	PT100
	Connection Method	2 wire or 3 wire	2 wire or 3 wire	2 wire or 3 wire
	Temperature Measuring Range	-50°C .. 100°C	0°C .. 100 °C	0°C .. 150 °C
	Sensor excitation current	<0.6mA	<0.6mA	<0.6mA
<b>Output</b>	Output Signal	4-20mA	4-20mA	4-20mA
	Linear output range	3.6mA .. 23.6mA	3.6mA .. 23.6mA	3.6mA .. 23.6mA
	Max. Load	≤ 750Ω	≤ 750Ω	≤ 750Ω
	Ripple	< 20 mVPP (at 750 Ω)	< 20 mVPP (at 750 Ω)	< 20 mVPP (at 750 Ω)
<b>Supply</b>	Voltage	AC	-	-
		DC	10-30V	10-30V
<b>Isolation</b>		-	-	-
<b>Measurement error</b>		< %0.1 Full scale	< %0.1 Full scale	< %0.1 Full scale
<b>Temperature coefficient</b>		≤ %0.02/°C	≤ %0.02/°C	≤ %0.02/°C
<b>Response Time</b>		< 20ms	< 20ms	< 20ms
<b>Sensor failure indication</b>		3.1mA (1 wire is broken), 24.6mA (at least 2 wire is broken)	3.1mA (1 wire is broken), 24.6mA (at least 2 wire is broken)	3.1mA (1 wire is broken), 24.6mA (at least 2 wire is broken)
<b>Permissible ambient temperature</b>	During operation	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
	During storage	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
<b>Relative Humidity</b>		Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
<b>Degree of protection</b>		IP20	IP20	IP20
<b>Weight(gr)</b>		42	42	42
<b>Permissible mounting position</b>		any	any	any

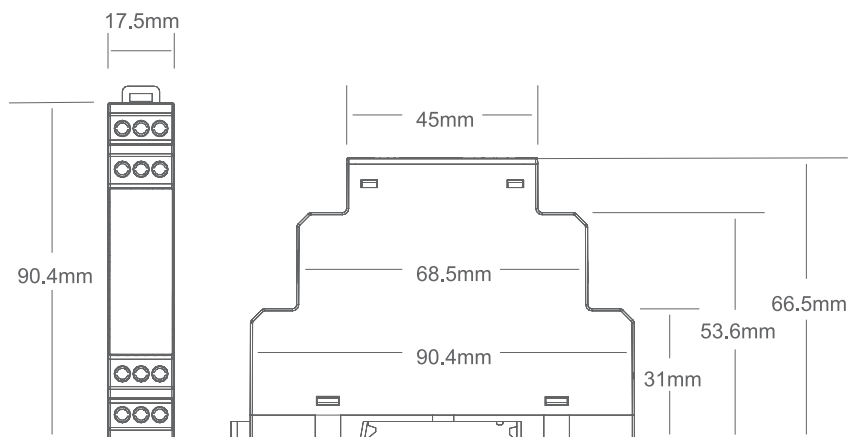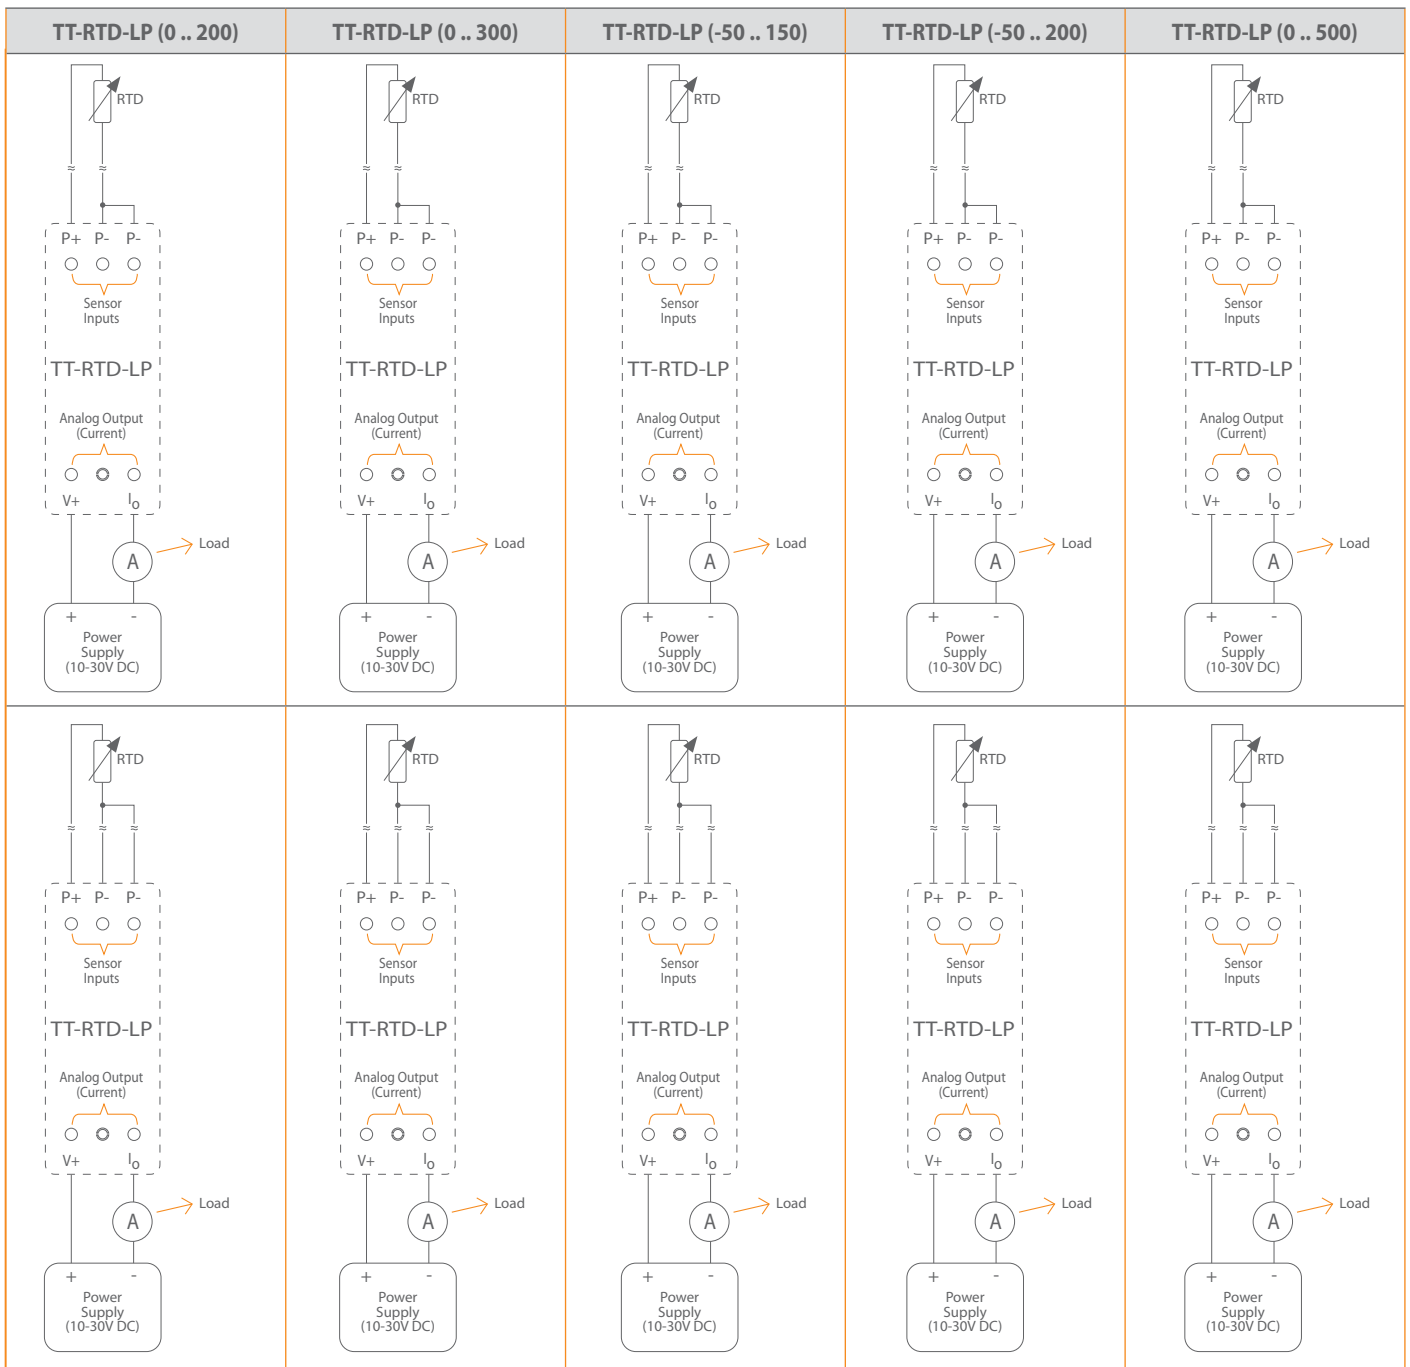

				
TT-RTD-LP (0 .. 200)	TT-RTD-LP (0 .. 300)	TT-RTD-LP (-50 .. 150)	TT-RTD-LP (-50 .. 200)	TT-RTD-LP (0 .. 500)
Non-Isolated PT100 Transducer	Non-Isolated PT100 Transducer	Non-Isolated PT100 Transducer	Non-Isolated PT100 Transducer	Non-Isolated PT100 Transducer
603863	603864	603865	603866	603867
17,5	17,5	17,5	17,5	17,5
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
PT100	PT100	PT100	PT100	PT100
2 wire or 3 wire	2 wire or 3 wire	2 wire or 3 wire	2 wire or 3 wire	2 wire or 3 wire
0°C .. 200 °C	0°C .. 300 °C	-50°C .. 150°C	-50°C .. 200°C	0°C .. 500°C
<0.6mA	<0.6mA	<0.6mA	<0.6mA	<0.6mA
4-20mA	4-20mA	4-20mA	4-20mA	4-20mA
3.6mA .. 23.6mA	3.6mA .. 23.6mA	3.6mA .. 23.6mA	3.6mA .. 23.6mA	3.6mA .. 23.6mA
≤ 750Ω	≤ 750Ω	≤ 750Ω	≤ 750Ω	≤ 750Ω
< 20 mVPP (at 750 Ω)	< 20 mVPP (at 750 Ω)	< 20 mVPP (at 750 Ω)	< 20 mVPP (at 750 Ω)	< 20 mVPP (at 750 Ω)
-	-	-	-	-
10-30V	10-30V	10-30V	10-30V	10-30V
-	-	-	-	-
< %0.1 Full scale	< %0.1 Full scale	< %0.1 Full scale	< %0.1 Full scale	< %0.1 Full scale
≤ %0.02/°C	≤ %0.02/°C	≤ %0.02/°C	≤ %0.02/°C	≤ %0.02/°C
< 20ms	< 20ms	< 20ms	< 20ms	< 20ms
3.1mA (1 wire is broken), 24.6mA (at least 2 wire is broken)	3.1mA (1 wire is broken), 24.6mA (at least 2 wire is broken)	3.1mA (1 wire is broken), 24.6mA (at least 2 wire is broken)	3.1mA (1 wire is broken), 24.6mA (at least 2 wire is broken)	3.1mA (1 wire is broken), 24.6mA (at least 2 wire is broken)
-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
IP20	IP20	IP20	IP20	IP20
42	42	42	42	42
any	any	any	any	any




Type		TT-RTD-LP (-50 .. 100)	TT-RTD-LP (0 .. 100)	TT-RTD-LP (0 .. 150)
Schematics	<p>2 wire connection</p>			
Schematics	<p>3 wire connection</p>			
Dimensional Drawings				



						
<b>Type</b>		<b>PISO-DC-1</b> (0-20mA/0-20mA)	<b>PISO-DC-1</b> (4-20mA/4-20mA)	<b>PISO-DC-1</b> (0-20mA/0-10V)	<b>PISO-DC-1</b> (0-20mA/0-5V)	<b>PISO-DC-2</b> (0-20mA/0-20mA)
<b>Definiton</b>		Passive DC Signal Isolator	Passive DC Signal Isolator	Passive DC Signal Isolator	Passive DC Signal Isolator	Passive DC Signal Isolator
<b>Order Number</b>		602800	602801	602802	602803	602850
<b>Casing Width(mm)</b>		17,5	17,5	17,5	17,5	17,5
<b>Connections</b>		Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
<b>Input</b>	Number of Channels	1 pc.	1 pc.	1 pc.	1 pc.	2 pc.
	Signal type	0-20mA	4-20mA	0-20mA	0-20mA	0-20mA
	Maximum input signal	50mA	50mA	50mA	50mA	50mA
<b>Output</b>	Number of Channels	1 pc.	1 pc.	1 pc.	1 pc.	2 pcs.
	Signal Type	0-20 mA	4-20 mA	0-10 V	0-5 V	0-20 mA
	Max. Current	24 mA	24 mA	-	-	24 mA
	Max. Voltage	-	-	12 V	12 V	-
	Ripple	< 20 mV (full scale)	< 20 mV (full scale)	< 20 mV (full scale)	< 20 mV (full scale)	< 20 mV (full scale)
	Load Resistance	≤ 250Ω	≤ 250Ω	≥ 5MΩ	≥ 5MΩ	≤ 250Ω
<b>Isolation</b>		1.5 kVrms	1.5 kVrms	1.5 kVrms	1.5 kVrms	1.5 kVrms
<b>Measurement error(Full Scale)</b>		< %0.1	< %0.1	< %0.2	< %0.2	< %0.1
<b>Response Time</b>		20 ms	20 ms	20 ms	20 ms	20 ms
<b>Temperature coefficient</b>		<50 ppm/K	<50 ppm/K	<50 ppm/K	<50 ppm/K	<50 ppm/K
<b>Permissible ambient temperature</b>	During operation	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
	During storage	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
<b>Relative Humidity</b>		Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)




						
<b>PISO-DC-2 (4-20mA/4-20mA)</b>	<b>PISO-DC-2 (0-20mA/0-10V)</b>	<b>PISO-DC-2 (0-20mA/0-5V)</b>	<b>PISO-DC-DUO (0-20mA/0-20mA, 0-20mA)</b>	<b>PISO-DC-DUO (4-20mA/4-20mA, 4-20mA)</b>	<b>PISO-DC-DUO (0-20mA/0-10V,0- 10V)</b>	<b>PISO-DC-DUO (0-20mA/0-5V,0- 5V)</b>
Passive DC Signal Isolator	Passive DC Signal Isolator	Passive DC Signal Isolator	Passive DC Signal Isolator	Passive DC Signal Isolator	Passive DC Signal Isolator	Passive DC Signal Isolator
602851	602852	602853	602700	602701	602702	602703
17,5	17,5	17,5	17,5	17,5	17,5	17,5
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
2 pc.	2 pc.	2 pc.	1 pc.	1 pc.	1 pc.	1 pc.
4-20mA	0-20mA	0-20mA	0-20mA	4-20mA	0-20mA	0-20mA
50mA	50mA	50mA	50mA	50mA	50mA	50mA
2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.
4-20 mA	0-10 V	0-5 V	0-20 mA	4-20 mA	0-10 V	0-5 V
24 mA	-	-	24 mA	24 mA	-	-
-	12 V	12 V	-	-	12 V	12 V
< 20 mV (full scale)	< 20 mV (full scale)	< 20 mV (full scale)	< 20 mV (full scale)	< 20 mV (full scale)	< 20 mV (full scale)	< 20 mV (full scale)
≤ 250Ω	≥ 5MΩ	≥ 5MΩ	≤ 250Ω	≤ 250Ω	≥ 5MΩ	≥ 5MΩ
1.5 kVrms	1.5 kVrms	1.5 kVrms	1.5 kVrms	1.5 kVrms	1.5 kVrms	1.5 kVrms
< %0.1	< %0.2	< %0.2	< %0.1	< %0.1	< %0.2	< %0.2
20 ms	20 ms	20 ms	20 ms	20 ms	20 ms	20 ms
<50 ppm/K	<50 ppm/K	<50 ppm/K	<50 ppm/K	<50 ppm/K	<50 ppm/K	<50 ppm/K
-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)

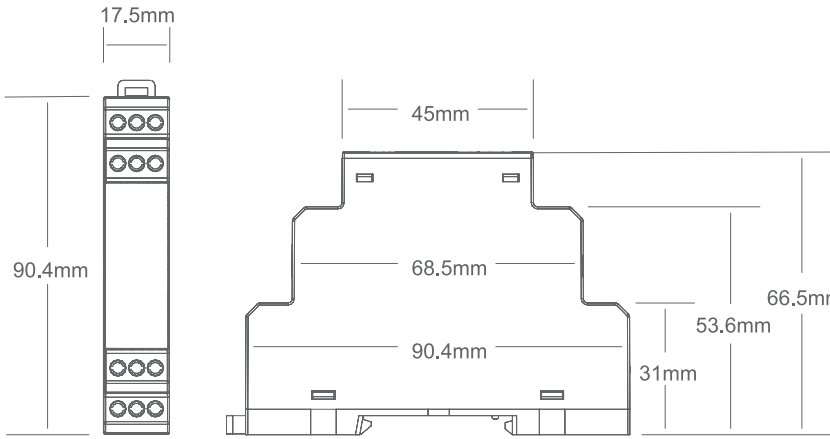Type	PISO-DC-1 (0-20mA/0-20mA)	PISO-DC-1 (4-20mA/4-20mA)	PISO-DC-1 (0-20mA/0-10V)	PISO-DC-1 (0-20mA/0-5V)	PISO-DC-2 (0-20mA/0-20mA)
Degree of protection	IP20	IP20	IP20	IP20	IP20
Permissible mounting position	any	any	any	any	any
Schematics					
Dimensional Drawings					







PISO-DC-2 (4-20mA/4-20mA)	PISO-DC-2 (0-20mA/0-10V)	PISO-DC-2 (0-20mA/0-5V)	PISO-DC-DUO (0-20mA/0-20mA, 0-20mA)	PISO-DC-DUO (4-20mA/4-20mA, 4-20mA)	PISO-DC-DUO (0-20mA/0-10V, 0-10V)	PISO-DC-DUO (0-20mA/0-5V,0-5V)
IP20	IP20	IP20	IP20	IP20	IP20	IP20
any	any	any	any	any	any	any





**NOTE:** Channel-1 and Channel-2 are totally isolated from each other.



**NOTE:** Channel-1 and Channel-2 are totally isolated from each other.




**NOTE:** If only one output channel is used, the other channel (which is not used) must be short-circuited.

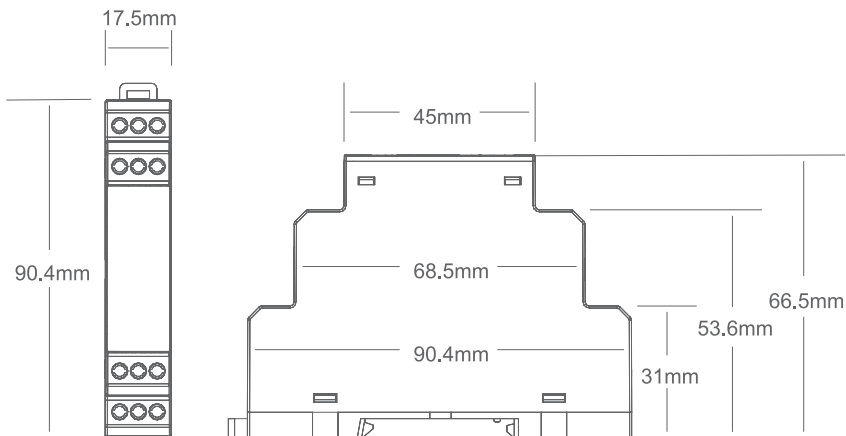

## CT3 series / Converting

### ISOLATION

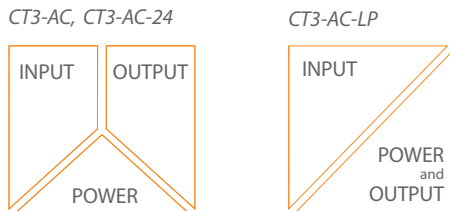


CT3 series transducers measure AC Current and convert it to an industry standard output signal which is directly proportional to the measured input. These transducers provide an output which is load independent and isolated from the input. Input range and output type must be adjusted before using them.

### LED INDICATION

Failure Status	LED Indication
Voltage Output Mode: Short Circuit	Err:
Current Output Mode: Open Circuit	Err:
No Signal	ON:

## VT3 series / Converting

### ISOLATION

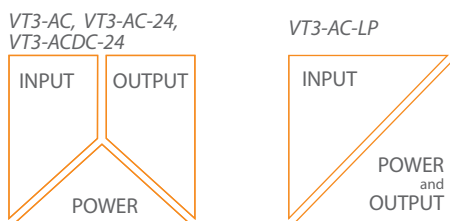

VT3 series transducers measure AC or DC(optional) voltage and converts it to an industry standard output signal which is directly proportional to the measured input. These transducers provide an output which is load independent and isolated from the input. Input range and output type must be adjusted before using them.


### LED INDICATION

Failure Status	LED Indication
Voltage Output Mode: Short Circuit	Err:
Current Output Mode: Open Circuit	Err:
No Signal	ON:



TT-RTD series / **Converting**


**NO ISOLATION**

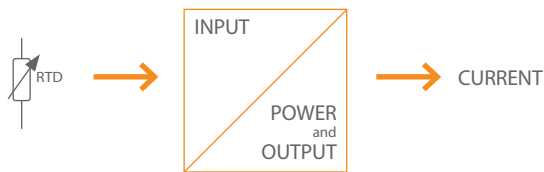

TT-RTD series transducers convert temperature signals from PT100 sensors to an industry standard output signal (4-20mA) which is directly proportional to the measured input.

Passive Isolator series / **Isolating**

**ISOLATION**



Passive signal isolator series serve to electrically isolate the analog DC signal in the range from 0-20 or 4-20mA which depending on version, then converted it to 0-20 mA, 4-20mA, 0-5V, 0-10V. It does not require an external power supply. These transducers provide an output which is load independent and isolated from the input.





# Switching Management Solutions

*Industrial  
switching  
with wide range*

## Defining an interface relay in simple terms

---

An interface relay is an electromagnetic switch operated by a relatively small electric current that can turn on or turn off a much larger electric current.

---

## In which fields are they most commonly used?

---

Switching  
Protection  
Controlling  
Filtering Isolation

An interface relay is an electrically operated switch that is used where it is necessary to control a circuit by a low-power signal.

It provides complete electrical protective isolation between control and controlled circuits.

Filtering AC power input signals in order to prevent current leakage.

Saving money and increasing efficiency for PLC outputs.

Reduced PLC outputs to meet energy consumption goals.

---

## In which fields are they most commonly used?

---

- PLC automation systems
  - Electric power plants
  - Energy management systems
  - Medium Voltage Panels
  - Industrial Machines
-




## Benefits and Advantages

- A wide range of power input from 6V to 230V
- DC and AC supply voltage options
- Integrated RCZ filter option
- 6, 8 and 12A current switching options
- High quality, long life
- Saving space with 6.2mm design
- LED status indicator in order to see actual movement of the contacts
- Labeling with terminal block marking materials
- Specially designed filtered models are not affected by voltage leakages.
- High level of Electromagnetic compatibility (EMC) i.e. maximum immunity to interferences.
- Self-Extinguishing plastic housing
- UL certificate

## Layout & Mounting

Klemsan interface relays are suitable for plug-in assembly onto 35 mm standard DIN rails.

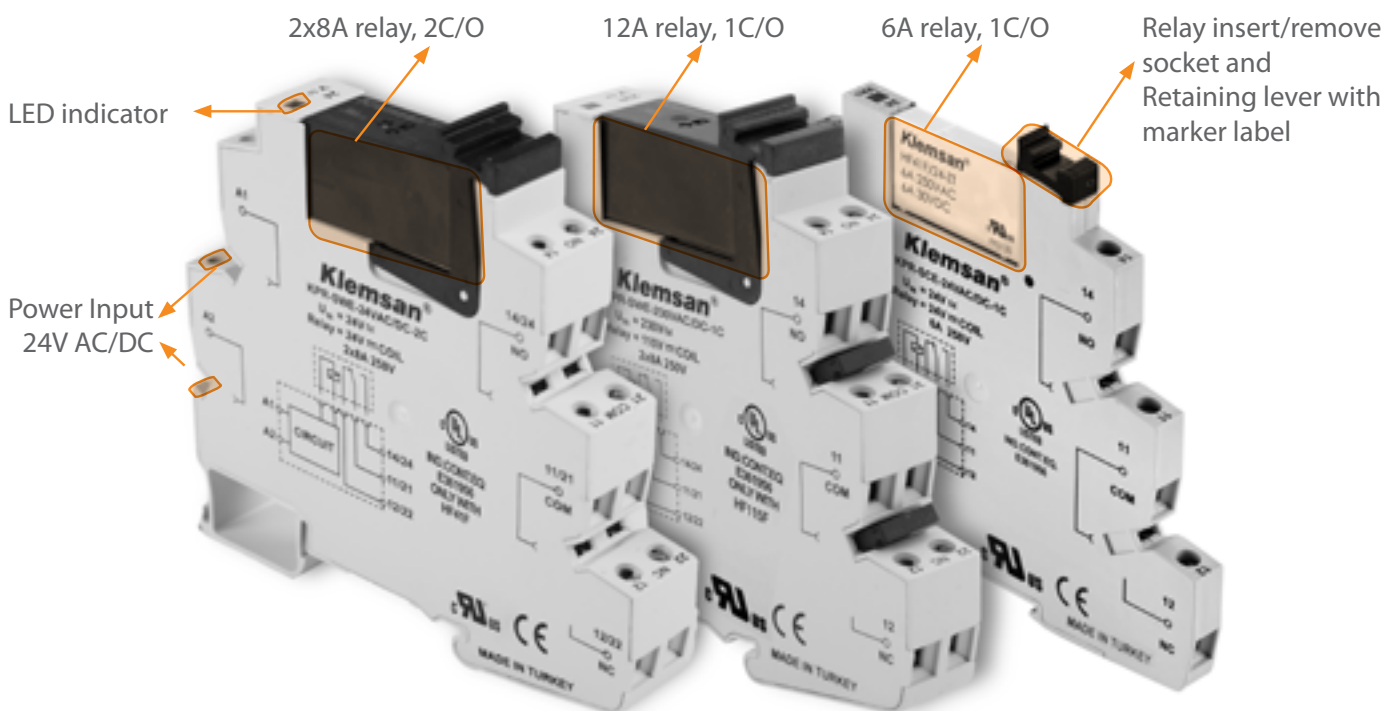

**KPR-SWE-230VAC/DC-2C**

**KPR-SWE-230VAC/DC-1C**

**KPR-SCE-24VAC/DC-1C**

## Automation System



Wide supply voltage range (up to 250VAC) and high switching current (up to 12A) provide longer PLC life.



**I/O CONTROL**  
All models

## Machine Control and Safety



Provides isolation between control and controlled circuits.



**ISOLATION**  
All models

## Scada System



Extends the life of PLC outputs by using interface relay to turn many devices on and off simultaneously.



**I/O CONTROL**  
All models

## Control Panels



It provides to control more than one load with external pluggable bridges.



**I/O CONTROL**  
All models





## Chemical Industry



Safe isolation between inputs and outputs for pumps, compressors and air conditioning applications.



**CONTROLLING**  
All models

## Electrical Test Systems



The interface between test equipment and system I/O devices with a high switching capacity.



**CONTROLLING**  
All models

## Pneumatic Control



Switching currents or voltage too high for PLC outputs to handle.



**SWITCHING**  
All models

## Tight Cabinets



Only 6.2 mm or 14 mm wide, thus saving considerable space in your enclosures.



**SPACE SAVING**  
All models










## Voltage Leakages











The voltage leakage causes the relay to stuck in the 'ON' state while the relay is switched as "OFF" or to activate the relay even though there is no voltage at the input. Thanks to the special filter circuit design, it prevents from on-off actions caused by voltage leakages.









**FILTERING**  
Filtered Models

									
Pre-assembled module (relay + socket)	Type	KPR-SCE-6VDC-1C	KPR-SCE-12VAC/DC-1C	KPR-SCE-12VDC-1C	KPR-SCE-24VAC/DC-1C	KPR-SCE-24VDC-1C	KPR-SCE-48VAC/DC-1C	KPR-SCE-48VDC-1C	
	Definition	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	
	Order Number	270794	270800	270804	270810	270814	270820	270824	
<b>Casing Width(mm)</b>		6,2	6,2	6,2	6,2	6,2	6,2	6,2	
<b>Connection</b>		Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	
<b>Packaging unit</b>		10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	
<b>Input</b>	Nominal Voltage(Un)	6VDC	12VAC/DC	12VDC	24VAC/DC	24VDC	48VAC/DC	48VDC	
	Operating voltage range	(0,8 – 1,15) x Un	(0,8 – 1,15) x Un	(0,8 – 1,15) x Un	(0,8 – 1,15) x Un	(0,8 – 1,15) x Un	(0,8 – 1,15) x Un	(0,8 – 1,15) x Un	
	Release voltage	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	
	Integrated RCZ filter	-	-	-	-	-	-	-	
	Power Consumption	AC	-	<0.35VA	-	<0.35VA	-	<0.6VA	-
	DC	<0.35W	<0.35W	<0.35W	<0.35W	<0.2W	<0.6W	<0.6W	
<b>Contact Characteristic</b>	Type	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	
	Material	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	
	Coil voltage	5VDC	12VDC	12VDC	24VDC	24VDC	24VDC	24VDC	
	Coil impedance	147x(1± 10%) Ω	848x(1± 10%) Ω	848x(1± 10%) Ω	3390x(1± 10%) Ω	3390x(1± 10%) Ω	3390x(1± 10%) Ω	3390x(1± 10%) Ω	
	Coil consumption	170mW	170mW	170mW	170mW	170mW	170mW	170mW	
	Operate time	10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.	
	Release time	5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.	
	Max. ratings (AC)	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	
	Max. ratings (DC)	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	
	Mechanical life time	10 <sup>7</sup> operations	10 <sup>7</sup> operations	10 <sup>7</sup> operations	10 <sup>7</sup> operations	10 <sup>7</sup> operations	10 <sup>7</sup> operations	10 <sup>7</sup> operations	
	Electrical life time operations (UL approval, 85°C)	NO	3 × 10 <sup>4</sup> operations	3 × 10 <sup>4</sup> operations	3 × 10 <sup>4</sup> operations	3 × 10 <sup>4</sup> operations	3 × 10 <sup>4</sup> operations	3 × 10 <sup>4</sup> operations	
		NC	1 × 10 <sup>4</sup> operations	1 × 10 <sup>4</sup> operations	1 × 10 <sup>4</sup> operations	1 × 10 <sup>4</sup> operations	1 × 10 <sup>4</sup> operations	1 × 10 <sup>4</sup> operations	
<b>Isolation resistance</b>		1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	
<b>Dielectric Strength</b>	Between relay coil and contacts	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	
	Between contacts	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	
<b>Permissible ambient temperature</b>	During operation	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	
	During storage	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	
<b>Relative Humidity</b>		5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	
<b>Degree of protection</b>		IP20	IP20	IP20	IP20	IP20	IP20	IP20	
<b>Weight(gr)</b>		32	32	32	32	32	32	32	
<b>Max. cable cross-section</b>		2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	
<b>Max. torque</b>		0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	
<b>Permissible mounting position</b>		any	any	any	any	any	any	any	
<b>Accessories and Components</b>		Type	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	
		Definition	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	
		Order Number	463 247	463 247	463 247	463 247	463 247	463 247	
		Packaging unit	25	25	25	25	25	25	
		Type	KPR-SCE-6VDC-1C (RELAY SOCKET)	KPR-SCE-12VAC/DC-1C (RELAY SOCKET)	KPR-SCE-12VDC-1C (RELAY SOCKET)	KPR-SCE-24VAC/DC-1C (RELAY SOCKET)	KPR-SCE-24VDC-1C (RELAY SOCKET)	KPR-SCE-48VAC/DC-1C (RELAY SOCKET)	KPR-SCE-48VDC-1C (RELAY SOCKET)
		Definition	Interface relay socket (6VDC)	Interface relay socket (12VAC/DC)	Interface relay socket (12VDC)	Interface relay socket (24VAC/DC)	Interface relay socket (24VDC)	Interface relay socket (48VAC/DC)	Interface relay socket (48VDC)
		Order Number	270795	270801	270805	270811	270815	270821	270825
		Packaging unit	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.





							
KPR-SCE-60VAC/DC-1C	KPR-SCE-60VDC-1C	KPR-SCE-115VAC/DC-1C	KPR-SCE-115VDC-1C	KPR-SCF-115VAC/DC-1C	KPR-SCE-230VAC/DC-1C	KPR-SCE-230VAC-1C	KPR-SCF-230VAC-1C
Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module with filter	Interface relay module	Interface relay module	Interface relay module with filter
270830	270834	270840	270844	270846	270850	270852	270858
6,2	6,2	6,2	6,2	6,2	6,2	6,2	6,2
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.
60VAC/DC	60VDC	115VAC/DC	115VDC	115VAC/DC	230VAC/DC	230VAC	230VAC
(0,8 – 1,15) x Un	(0,8 – 1,15) x Un	(0,8 – 1,15) x Un	(0,8 – 1,15) x Un	(0,8 – 1,15) x Un	(0,8 – 1,15) x Un	(0,8 – 1,15) x Un	(0,8 – 1,15) x Un
0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un
-	-	-	-	OK	-	-	OK
<0.4VA	-	<0.7VA	-	<0.7VA	<1.3VA	-	<2.5VA
<0.3W	<0.3W	<0.6W	<0.6W	<0.6W	<1.2W	-	-
1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)
AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2
60VDC	60VDC	60VDC	60VDC	60VDC	60VDC	60VDC	60VDC
16600x(1± 15%) Ω	16600x(1± 15%) Ω	16600x(1± 15%) Ω	16600x(1± 15%) Ω	16600x(1± 15%) Ω	16600x(1± 15%) Ω	16600x(1± 15%) Ω	16600x(1± 15%) Ω
210mW	210mW	210mW	210mW	210mW	210mW	170mW	170mW
10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.
5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.
6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA
6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W
10 <sup>7</sup> operations	10 <sup>7</sup> operations	10 <sup>7</sup> operations	10 <sup>7</sup> operations	10 <sup>7</sup> operations	10 <sup>7</sup> operations	10 <sup>7</sup> operations	10 <sup>7</sup> operations
3 × 10 <sup>4</sup> operations	3 × 10 <sup>4</sup> operations	3 × 10 <sup>4</sup> operations	3 × 10 <sup>4</sup> operations	3 × 10 <sup>4</sup> operations	3 × 10 <sup>4</sup> operations	3 × 10 <sup>4</sup> operations	3 × 10 <sup>4</sup> operations
1 × 10 <sup>4</sup> operations	1 × 10 <sup>4</sup> operations	1 × 10 <sup>4</sup> operations	1 × 10 <sup>4</sup> operations	1 × 10 <sup>4</sup> operations	1 × 10 <sup>4</sup> operations	1 × 10 <sup>4</sup> operations	1 × 10 <sup>4</sup> operations
1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)
4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.
1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.
-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C
-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C
5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)
IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
32	32	32	32	32	32	32	32
2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>
0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm
any	any	any	any	any	any	any	any
APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR
Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate
463 247	463 247	463 247	463 247	463 247	463 247	463 247	463 247
25	25	25	25	25	25	25	25
KPR-SCE-60VAC/DC-1C (RELAY SOCKET)	KPR-SCE-60VDC-1C (RELAY SOCKET)	KPR-SCE-115VAC/DC-1C (RELAY SOCKET)	KPR-SCE-115VDC-1C (RELAY SOCKET)	KPR-SCF-115VAC/DC-1C (RELAY SOCKET)	KPR-SCE-230VAC/DC-1C (RELAY SOCKET)	KPR-SCE-230VAC-1C (RELAY SOCKET)	KPR-SCF-230VAC-1C (RELAY SOCKET)
Interface relay socket (60VAC/DC)	Interface relay socket (60VDC)	Interface relay socket (115VAC/DC)	Interface relay socket (115VDC)	Interface relay socket with RCZ filter (115VAC/DC)	Interface relay socket (230VAC/DC)	Interface relay socket (230VAC)	Interface relay socket with RCZ filter (230VAC)
270831	270835	270841	270845	270847	270851	270853	270859
10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.

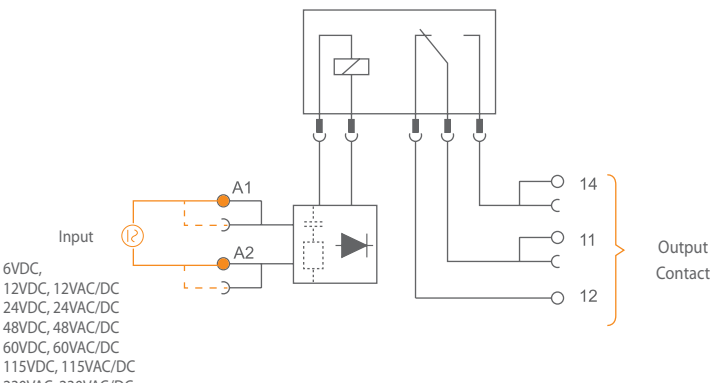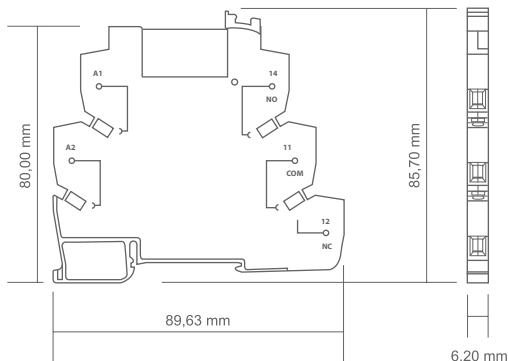Type		KPR-SCE-6VDC-1C	KPR-SCE-12VAC/DC-1C	KPR-SCE-12VDC-1C	KPR-SCE-24VAC/DC-1C	KPR-SCE-24VDC-1C	KPR-SCE-48VAC/DC-1C	KPR-SCE-48VDC-1C		
Accessories and Components	 Relay	Type	Slim type 5VDC relay	Slim type 12VDC relay	Slim type 12VDC relay	Slim type 24VDC relay	Slim type 24VDC relay	Slim type 24VDC relay	Slim type 24VDC relay	
		Definiton	Relay for 270794 and 270795	Relay for 270800 and 270801	Relay for 270804 and 270805	Relay for 270810 and 270811	Relay for 270814 and 270815	Relay for 270820 and 270821	Relay for 270824 and 270825	
		Order Number	095043	095042	095042	095041	095041	095041	095041	
		Packaging unit	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	
	 Plug-in bridge-16	Type	TK-KPR-S (KPR-SCE BRIDGE/16)							
		Definiton	Plug-in bridge for 16 hole							
		Order Number	476605							
		Packaging unit	25 pcs.							
	 Plug-in bridge-8	Type	TK-KPR-S (KPR-SCE BRIDGE/8)							
		Definiton	Plug-in bridge for 8 hole							
		Order Number	476606							
		Packaging unit	50 pcs.							
	 Dekafix	Type	DG 10/6T							
		Definiton	Terminal Labels for interface relays							
		Order Number	505390							
		Packaging unit	360 pcs.							
Schematics	 <p>Input</p> <p>6VDC, 12VDC, 12VAC/DC 24VDC, 24VAC/DC 48VDC, 48VAC/DC 60VDC, 60VAC/DC 115VDC, 115VAC/DC 230VAC, 230VAC/DC</p> <p>Output Contact</p>									
Dimensional Drawings	 <p>80,00 mm</p> <p>89,63 mm</p> <p>85,70 mm</p> <p>6,20 mm</p>									





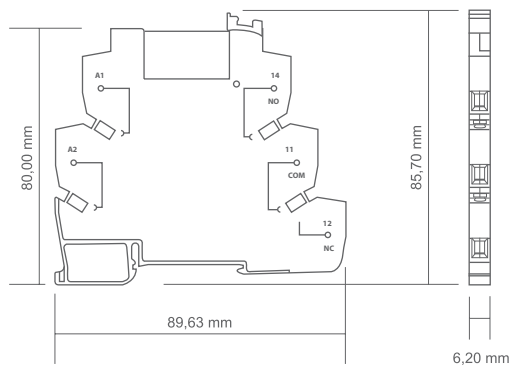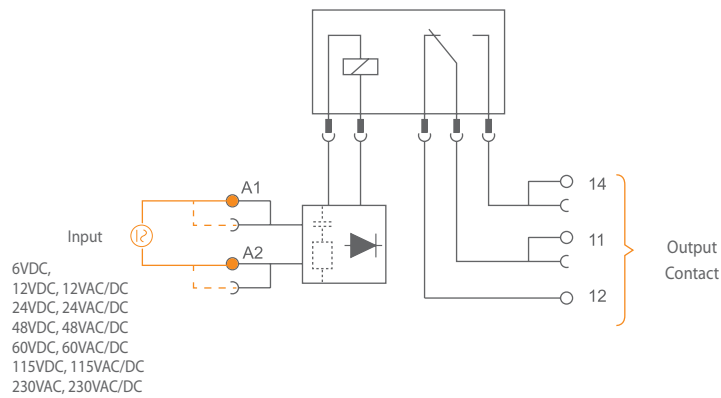






KPR-SCE-60VAC/DC-1C	KPR-SCE-60VDC-1C	KPR-SCE-115VAC/DC-1C	KPR-SCE-115VDC-1C	KPR-SCF-115VAC/DC-1C	KPR-SCE-230VAC/DC-1C	KPR-SCE-230VAC-1C	KPR-SCF-230VAC-1C
Slim type 60VDC relay	Slim type 60VDC relay	Slim type 60VDC relay	Slim type 60VDC relay	Slim type 60VDC relay	Slim type 60VDC relay	Slim type 24VDC relay	Slim type 60VDC relay
Relay for 270830 and 270831	Relay for 270834 and 270835	Relay for 270840 and 270841	Relay for 270844 and 270845	Relay for 270846 and 270847	Relay for 270850 and 270851	Relay for 270852 and 270853	Relay for 270856 and 270857
095040	095040	095040	095040	095040	095040	095041	095040
10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.
TK-KPR-S (KPR-SCE BRIDGE/16)							
Plug-in bridge for 16 hole							
476605							
25 pcs.							
TK-KPR-S (KPR-SCE BRIDGE/8)							
Plug-in bridge for 8 hole							
476606							
50 pcs.							
DG 10/6 T							
Terminal Labels for interface relays							
505390							
360 pcs.							



									
<b>Pre-assembled module (relay + socket)</b>	<b>Type</b>	KPR-SWE-6VDC-1C	KPR-SWE-12VAC/DC-1C	KPR-SWE-12VDC-1C	KPR-SWE-24VAC/DC-1C	KPR-SWE-24VDC-1C	KPR-SWE-48VAC/DC-1C	KPR-SWE-48VDC-1C	
	<b>Definition</b>	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	
	<b>Order Number</b>	272 004	272 020	272 024	272 040	272 044	272 060	272 064	
<b>Casing Width(mm)</b>		14	14	14	14	14	14	14	
<b>Connection</b>		Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	
<b>Packaging unit</b>		10	10	10	10	10	10	10	
<b>Input</b>	<b>Nominal Voltage(Un)</b>	6VDC	12VAC/DC	12VDC	24VAC/DC	24VDC	48VAC/DC	48VDC	
	<b>Operating voltage range</b>	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	
	<b>Release voltage</b>	< %40 x UN	< %40 x UN	< %40 x UN	< %40 x UN	< %40 x UN	< %30 x UN	< %30 x UN	
	<b>Integrated RCZ filter</b>	-	-	-	-	-	-	-	
	<b>Power</b>	AC	-	<1VA	-	<1VA	-	<1VA	
	<b>Consumption</b>	DC	<1W	<1W	<1W	<1W	<1W	<1W	
<b>Contact Characteristic</b>	<b>Type</b>	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	
	<b>Material</b>	AgSnO2	AgSnO3	AgSnO4	AgSnO5	AgSnO6	AgSnO7	AgSnO8	
	<b>Coil voltage</b>	5VDC	12VDC	12VDC	24VDC	24VDC	48VDC	48VDC	
	<b>Coil impedance</b>	147x(± 10%) Ω	848x(± 10%) Ω	848x(± 10%) Ω	3390x(± 15%) Ω	3390x(± 15%) Ω	10600x(± 15%) Ω	10600x(± 15%) Ω	
	<b>Coil consumption</b>	400mW	400mW	400mW	400mW	400mW	400mW	400mW	
	<b>Operate time</b>	15 ms Maks.	15 ms Maks.	15 ms Maks.	15 ms Maks.	15 ms Maks.	15 ms Maks.	15 ms Maks.	
	<b>Release time</b>	8 ms Maks.	8 ms Maks.	8 ms Maks.	8 ms Maks.	8 ms Maks.	8 ms Maks.	8 ms Maks.	
	<b>Max. ratings (AC)</b>	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	
	<b>Max. ratings (DC)</b>	12A/ 30VDC; 240W	12A/ 30VDC; 240W	12A/ 30VDC; 240W	12A/ 30VDC; 240W	12A/ 30VDC; 240W	12A/ 30VDC; 240W	12A/ 30VDC; 240W	
	<b>Mechanical life time</b>	1 x 10 <sup>4</sup> 7	1 x 10 <sup>4</sup> 7	1 x 10 <sup>4</sup> 7	1 x 10 <sup>4</sup> 7	1 x 10 <sup>4</sup> 7	1 x 10 <sup>4</sup> 7	1 x 10 <sup>4</sup> 7	
	<b>Electrical life time</b>	NO NC	3x10 <sup>4</sup> 4 (85°C) 1x10 <sup>4</sup> 5 (85°C)	3x10 <sup>4</sup> 4 (85°C) 1x10 <sup>4</sup> 5 (85°C)	3x10 <sup>4</sup> 4 (85°C) 1x10 <sup>4</sup> 5 (85°C)	3x10 <sup>4</sup> 4 (85°C) 1x10 <sup>4</sup> 5 (85°C)	3x10 <sup>4</sup> 4 (85°C) 1x10 <sup>4</sup> 5 (85°C)	3x10 <sup>4</sup> 4 (85°C) 1x10 <sup>4</sup> 5 (85°C)	3x10 <sup>4</sup> 4 (85°C) 1x10 <sup>4</sup> 5 (85°C)
	<b>Isolation resistance</b>		1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)
<b>Dielectric Strength</b>	<b>Between relay coil and contacts</b>	5000VAC 1 min.	5000VAC 1 min.	5000VAC 1 min.	5000VAC 1 min.	5000VAC 1 min.	5000VAC 1 min.	5000VAC 1 min.	
	<b>Between contacts</b>	1000VAC 1 min...	1000VAC 1 min...	1000VAC 1 min...	1000VAC 1 min...	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	
<b>Permissible ambient temperature</b>	<b>During operation</b>	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	
	<b>During storage</b>	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	
<b>Relative Humidity</b>		5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	
<b>Degree of protection</b>		IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	
<b>Weight(gr)</b>		56	56	56	56	56	56	56	
<b>Max. cable cross-section</b>		2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	
<b>Max. Torque</b>		0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	
<b>Permissible mounting position</b>		any	any	any	any	any	any	any	
<b>Accessories and Components</b>		<b>Type</b>	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	
		<b>Definition</b>	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate
		<b>Order Number</b>	463 247	464 247	465 247	466 247	467 247	468 247	469 247
		<b>Packaging unit</b>	25	25	25	25	25	25	25
		<b>Type</b>	"KPR-SWE-6VDC-1C (Röle Soket)"	"KPR-SWE-12VAC/DC-1C (Relay Socket)"	KPR-SWE-12VDC-1C	KPR-SWE-24VAC/DC-1C (Relay Socket)	KPR-SWE-24VDC-1C (Relay Socket)	KPR-SWE-48VAC/DC-1C (Relay Socket)	KPR-SWE-48VDC-1C (Relay Socket)
		<b>Definition</b>	Interface relay socket(6V DC)	Interface relay socket(12VAC/DC)	Interface relay socket(12VAC/DC)	Interface relay socket(24VAC/DC)	Interface relay socket(24VDC)	Interface relay socket(48VAC/DC)	Interface relay socket(48VDC)
		<b>Order Number</b>	272 005	272 021	272 025	272 041	272 045	272 061	272 065
		<b>Packaging unit</b>	10	10	10	10	10	10	10
		<b>Type</b>	1 C/O 5VDC Relay	1 C/O 12VDC Relay	1 C/O 12VDC Relay	1 C/O 24VDC Relay	1 C/O 24VDC Relay	1 C/O 48VDC Relay	1 C/O 48VDC Relay
		<b>Definition</b>	Relay for 272 004 and 272 505	Relay for 272 020 and 272 521	Relay for 272 024 and 272 525	Relay for 272 040 and 272 541	Relay for 272 044 and 272 545	Relay for 272 060 and 272 561	Relay for 272 064 and 272 565
		<b>Order Number</b>	095 064	095 063	095 063	095 062	095 062	095 061	095 061
		<b>Packaging unit</b>	50	50	50	50	50	50	50
		<b>Type</b>	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)
		<b>Definition</b>	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole
		<b>Order Number</b>	476 900	476 900	476 900	476 900	476 900	476 900	476 900
		<b>Packaging unit</b>	25	25	25	25	25	25	25
		<b>Type</b>	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI
		<b>Definition</b>	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole
		<b>Order Number</b>	476 910	476 910	476 910	476 910	476 910	476 910	476 910
		<b>Packaging unit</b>	25	25	25	25	25	25	25
									



								
KPR-SWE-60VAC/DC-1C	KPR-SWE-60VDC-1C	KPR-SWE-115VAC/DC-1C	KPR-SWE-115VDC-1C	KPR-SWF-115VAC/DC-1C	KPR-SWE-230VAC/DC-1C	KPR-SWE-230VAC-1C	KPR-SWF-230VAC/VDC-1C	KPR-SWF-230VAC-1C
Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module
272 080	272 084	272 100	272 104	272 106	272 120	272 122	272 126	272 128
14	14	14	14	14	14	14	14	14
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
10	10	10	10	10	10	10	10	10
60VAC/DC	60VDC	115VAC/DC	115VDC	115VAC/DC	230VAC/DC	30VAC	230VAC/VDC	230VAC
> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN
< %30 x UN	< %30 x UN	< %30 x UN	< %30 x UN	< %30 x UN	< %40 x UN	< %30 x UN	< %30 x UN	< %30 x UN
-	-	-	-	Available	-	-	Available	Available
<1VA	-	<1VA	-	<1VA	<1VA	<1VA	<1VA	<1VA
<1W	<1W	<1W	<1W	<1W	<1W	<1W	<1W	<1W
1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)	1 C/O (SPDT)
AgSnO9	AgSnO10	AgSnO11	AgSnO12	AgSnO13	AgSnO14	AgSnO15	AgSnO16	AgSnO17
48VDC	48VDC	110VDC	110VDC	110VDC	110VDC	110VDC	110VDC	110VDC
10600x(1± 15%) Ω	10600x(1± 15%) Ω	10600x(1± 15%) Ω	10600x(1± 15%) Ω	10600x(1± 15%) Ω	10600x(1± 15%) Ω	10600x(1± 15%) Ω	10600x(1± 15%) Ω	10600x(1± 15%) Ω
400mW	400mW	400mW	400mW	400mW	400mW	400mW	400mW	400mW
15 ms Maks.	15 ms Maks.	15 ms Maks.	15 ms Maks.	15 ms Maks.	15 ms Maks.	15 ms Maks.	15 ms Maks.	15 ms Maks.
8 ms Maks.	8 ms Maks.	8 ms Maks.	8 ms Maks.	8 ms Maks.	8 ms Maks.	8 ms Maks.	8 ms Maks.	8 ms Maks.
12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA	12A/ 400VAC; 2000VA
12A/ 30VDC ; 240W	12A/ 30VDC ; 240W	12A/ 30VDC ; 240W	12A/ 30VDC ; 240W	12A/ 30VDC ; 240W	12A/ 30VDC ; 240W	12A/ 30VDC ; 240W	12A/ 30VDC ; 240W	12A/ 30VDC ; 240W
1x10 <sup>-7</sup>	1x10 <sup>-7</sup>	1x10 <sup>-7</sup>	1x10 <sup>-7</sup>	1x10 <sup>-7</sup>	1x10 <sup>-7</sup>	1x10 <sup>-7</sup>	1x10 <sup>-7</sup>	1x10 <sup>-7</sup>
3x10 <sup>-4</sup> (85°C)	3x10 <sup>-4</sup> (85°C)	3x10 <sup>-4</sup> (85°C)	3x10 <sup>-4</sup> (85°C)	3x10 <sup>-4</sup> (85°C)	3x10 <sup>-4</sup> (85°C)	3x10 <sup>-4</sup> (85°C)	3x10 <sup>-4</sup> (85°C)	3x10 <sup>-4</sup> (85°C)
1x10 <sup>-5</sup> (85°C)	1x10 <sup>-5</sup> (85°C)	1x10 <sup>-5</sup> (85°C)	1x10 <sup>-5</sup> (85°C)	1x10 <sup>-5</sup> (85°C)	1x10 <sup>-5</sup> (85°C)	1x10 <sup>-5</sup> (85°C)	1x10 <sup>-5</sup> (85°C)	1x10 <sup>-5</sup> (85°C)
1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)
5000VAC 1 min.	5000VAC 1 min.	5000VAC 1 min.	5000VAC 1 min.	5000VAC 1 min.	5000VAC 1 min.	5000VAC 1 min.	5000VAC 1 min.	5000VAC 1 min.
1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.
-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C
-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C
5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)
IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
56	56	56	56	56	56	56	56	56
2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>
0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm
any	any	any	any	any	any	any	any	any
APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR
Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate
470 247	471 247	472 247	473 247	474 247	475 247	476 247	477 247	478 247
25	25	25	25	25	25	25	25	25
KPR-SWE-60VAC/DC-1C (Relay Socket)	KPR-SWE-60VDC-1C (Relay Socket)	KPR-SWE-115VAC/DC-1C (Relay Socket)	KPR-SWE-115VDC-1C (Relay Socket)	KPR-SWF-115VAC/DC-1C (Relay Socket)	KPR-SWE-230VAC/DC-1C (Relay Socket)	KPR-SWE-230VAC-1C (Relay Socket)	KPR-SWF-230VAC/VDC-1C (Relay Socket)	KPR-SWF-230VAC-1C (Relay Socket)
Interface relay socket(60VAC/DC)	Interface relay socket(60VDC)	Interface relay socket(115VAC/DC)	Interface relay socket(115VDC)	"Interface relay socket with RCZ filter(115VAC/DC)"	Interface relay socket(230VAC/DC)	Interface relay socket(230VDC)	Interface relay socket with RCZ filter(230VAC/DC)	Interface relay socket with RCZ filter(230VAC)
272 081	272 085	272 101	272 105	272 107	272 121	272 123	272 127	272 129
10	10	10	10	10	10	10	10	10
1 C/O 48VDC Relay	1 C/O 48VDC Relay	1 C/O 110VDC Relay	1 C/O 110VDC Relay	1 C/O 110VDC Relay	1 C/O 110VDC Relay	1 C/O 110VDC Relay	1 C/O 110VDC Relay	1 C/O 110VDC Relay
Relay for 272 080 and 272 581	Relay for 272 084 and 272 585	Relay for 272 100 and 272 601	Relay for 272 104 and 272 605	Relay for 272 106 and 272 607	Relay for 272 120 and 272 621	Relay for 272 122 and 272 623	Relay for 272 126 and 272 627	Relay for 272 128 and 272 629
095 061	095 061	095 060	095 060	095 060	095 060	095 060	095 060	095 060
50	50	50	50	50	50	50	50	50
TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)
Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole
476 900	476 900	476 900	476 900	476 900	476 900	476 900	476 900	476 900
25	25	25	25	25	25	25	25	25
K-KPR-SWE-2-LI	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI	K-KPR-SWE-2-LI
Plug-in bridge for 2 hole	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole	Plug-in bridge for 2 hole
476 910	476 910	476 910	476 910	476 910	476 910	476 910	476 910	476 910
25	25	25	25	25	25	25	25	25

Type		KPR-SWE-6VDC-1C	KPR-SWE-12VAC/DC-1C	KPR-SWE-12VDC-1C	KPR-SWE-24VAC/DC-1C	KPR-SWE-24VDC-1C	KPR-SWE-48VAC/DC-1C	KPR-SWE-48VDC-1C
<b>Accessories and Components</b>	Dekafix	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T
	Definiton	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays
	Order Number	505 390	505 390	505 390	505 390	505 390	505 390	505 390
	Packaging unit	360	360	360	360	360	360	360

**Schematics**

Giriş

6VDC,  
12VDC, 12VAC/DC  
24VDC, 24VAC/DC  
48VDC, 48VAC/DC  
60VDC, 60VAC/DC  
115VDC, 115VAC/DC  
230VAC, 230VAC/DC

Output Contact

**Dimensional Drawings**















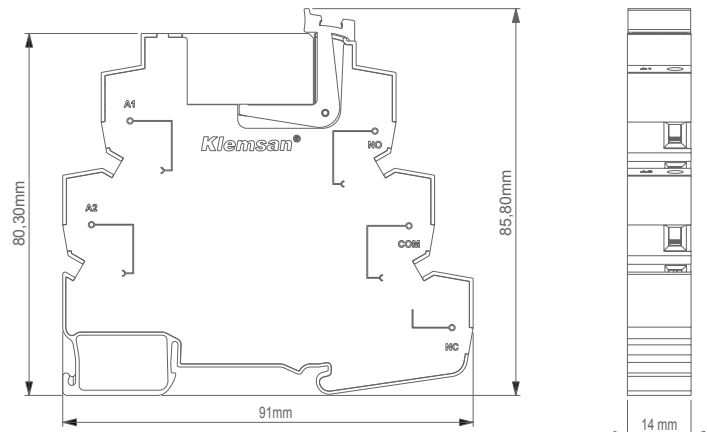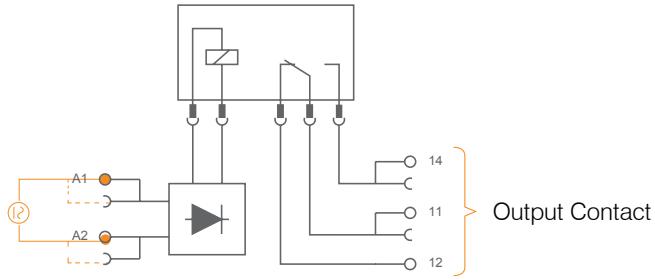



KPR-SWE-60VAC/DC-1C	KPR-SWE-60VDC-1C	KPR-SWE-115VAC/DC-1C	KPR-SWE-115VDC-1C	KPR-SWF-115VAC/DC-1C	KPR-SWE-230VAC/DC-1C	KPR-SWE-230VAC-1C	KPR-SWF-230VAC/VDC-1C	KPR-SWF-230VAC-1C
DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T
Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays
505 390	505 390	505 390	505 390	505 390	505 390	505 390	505 390	505 390
360	360	360	360	360	360	360	360	360








Giriş

6VDC,  
12VDC, 12VAC/DC  
24VDC, 24VAC/DC  
48VDC, 48VAC/DC  
60VDC, 60VAC/DC  
115VDC, 115VAC/DC  
230VAC, 230VAC/DC



									
Pre-assembled module (relay + socket)	Type	KPR-SWE-6VDC-2C	KPR-SWE-12VAC/DC-2C	KPR-SWE-12VDC-2C	KPR-SWE-24VAC/DC-2C	KPR-SWE-24VDC-2C	KPR-SWE-48VAC/DC-2C	KPR-SWE-48VDC-2C	
	Definition	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	
	Order Number	272 504	272 520	272 524	272 540	272 544	272 560	272 564	
<b>Casing Width(mm)</b>		14	14	14	14	14	14	14	
<b>Connection</b>		Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	
<b>Packaging unit</b>		10	10	10	10	10	10	10	
<b>Input</b>	Nominal Voltage(Un)	6VDC	12VAC/DC	12VDC	24VAC/DC	24VDC	48VAC/DC	48VDC	
	Operating voltage range	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	
	Release voltage	< %40 x UN	< %40 x UN	< %40 x UN	< %40 x UN	< %40 x UN	< %30 x UN	< %30 x UN	
	Integrated RCZ filter	-	-	-	-	-	-	-	
	Power Consumption	AC DC	- <1W	<1W	<1W	<1W	<1W	<1W	
<b>Contact Characteristic</b>	Type	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	
	Material	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	
	Coil voltage	5VDC	12VDC	12VDC	24VDC	24VDC	48VDC	48VDC	
	Coil impedance	62 x (1 ±10%) Ω	360 x (1 ±10%)	360 x (1 ±10%)	1440 x (1 ±10%)	1440 x (1 ±10%)	5760 x (1 ±10%)	5760 x (1 ±10%)	
	Coil consumption	400mW	400mW	400mW	400mW	400mW	400mW	400mW	
	Operate time	15ms Max.	15ms Max.	15ms Max.	15ms Max.	15ms Max.	15ms Max.	15ms Max.	
	Release time	8ms Max.	8ms Max.	8ms Max.	8ms Max.	8ms Max.	8ms Max.	8ms Max.	
	Max. ratings (AC)	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	
	Max. ratings (DC)	8A/30VDC; 240W	8A/30VDC; 240W	8A/30VDC; 240W	8A/30VDC; 240W	8A/30VDC; 240W	8A/30VDC; 240W	8A/30VDC; 240W	
	Mechanical life time	10 <sup>^7</sup>	10 <sup>^7</sup>	10 <sup>^7</sup>	10 <sup>^7</sup>	10 <sup>^7</sup>	10 <sup>^7</sup>	10 <sup>^7</sup>	
	Electrical life time	NO NC	3x10 <sup>^4</sup> 1x10 <sup>^4</sup>	3x10 <sup>^4</sup> 1x10 <sup>^4</sup>	3x10 <sup>^4</sup> 1x10 <sup>^4</sup>	3x10 <sup>^4</sup> 1x10 <sup>^4</sup>	3x10 <sup>^4</sup> 1x10 <sup>^4</sup>	3x10 <sup>^4</sup> 1x10 <sup>^4</sup>	
<b>Isolation resistance</b>		1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	
<b>Dielectric Strength</b>	Between relay coil and contacts	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	
	Between contacts	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	
<b>Permissible ambient temperature</b>	During operation	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	
	During storage	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	
<b>Relative Humidity</b>		5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	
<b>Degree of protection</b>		IP20	IP20	IP20	IP20	IP20	IP20	IP20	
<b>Weight(gr)</b>		56	56	56	56	56	56	56	
<b>Max. cable cross-section</b>		2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	
<b>Max. Torque</b>		0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	
<b>Permissible mounting position</b>		any	any	any	any	any	any	any	
<b>Accessories and Components</b>		Type	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	
		Definition	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	
		Order Number	463 247	463 247	463 247	463 247	463 247	463 247	
		Type	KPR-SWE-6VDC-2C (RELAY SOCKET)	KPR-SWE-12VAC/DC-2C (RELAY SOCKET)	KPR-SWE-12VDC-2C (RELAY SOCKET)	KPR-SWE-24VAC/DC-2C (RELAY SOCKET)	KPR-SWE-24VDC-2C (RELAY SOCKET)	KPR-SWE-48VAC/DC-2C (RELAY SOCKET)	KPR-SWE-48VDC-2C (RELAY SOCKET)
		Definition	Interface relay socket (6VDC)	Interface relay socket (12VAC/DC)	Interface relay socket (12VDC)	Interface relay socket (24VAC/DC)	Interface relay socket (24VDC)	Interface relay socket (48VAC/DC)	Interface relay socket (48VDC)
		Order Number	272 505	272 521	272 525	272 541	272 545	272 561	272 565
		Type	2 C/O 5VDC Relay	2 C/O 12VDC Relay	2 C/O 12VDC Relay	2 C/O 24VDC Relay	2 C/O 24VDC Relay	2 C/O 48VDC Relay	2 C/O 48VDC Relay
		Definition	Relay for 272 504 and 272 505	Relay for 272 520 and 272 521	Relay for 272 524 and 272 525	Relay for 272 540 and 272 541	Relay for 272 544 and 272 545	Relay for 272 560 and 272 561	Relay for 272 564 and 272 565
		Order Number	095 054	095 053	095 053	095 052	095 052	095 051	095 051
		Type	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)
		Definition	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole
		Order Number	476 900	476 900	476 900	476 900	476 900	476 900	476 900
		Type	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T
		Definition	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays
		Order Number	505 390	505 390	505 390	505 390	505 390	505 390	505 390
			Packaging unit	360	360	360	360	360	360



								
KPR-SWE-60VAC/DC-2C	KPR-SWE-60VDC-2C	KPR-SWE-115VAC/DC-2C	KPR-SWE-115VDC-2C	KPR-SWF-115VAC/DC-2C	KPR-SWE-230VAC/DC-2C	KPR-SWE-230VAC-2C	KPR-SWF-230VAC/VDC-2C	KPR-SWF-230VAC-2C
Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module	Interface relay module
272 580	272 584	272 600	272 604	272 606	272 620	272 622	272 626	272 628
14	14	14	14	14	14	14	14	14
Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal	Screw terminal
10	10	10	10	10	10	10	10	10
60VAC/DC	60VDC	115VAC/DC	115VDC	115VAC/DC	230VAC/DC	230VAC	230VAC/DC	230VAC
> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN	> %80 x UN
< %30 x UN	< %30 x UN	< %30 x UN	< %30 x UN	< %30 x UN	< %30 x UN	< %30 x UN	< %30 x UN	< %30 x UN
-	-	-	-	Available	-	-	Available	Available
<1VA	-	<1VA	-	<1VA	<2VA	<2VA	<2VA	<2VA
<1W	<1W	<1W	<1W	<1W	<1W	-	<2W	-
2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)	2 C/O (SPDT)
AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2
60VDC	60VDC	115VDC	115VDC	115VDC	115VDC	115VDC	115VDC	115VDC
5760 x (1 ±10%)	5760 x (1 ±10%)	25200 x (1 ±10%)	25200 x (1 ±10%)	25200 x (1 ±10%)	25200 x (1 ±10%)	25200 x (1 ±10%)	25200 x (1 ±10%)	25200 x (1 ±10%)
400mW	400mW	400mW	400mW	400mW	400mW	400mW	400mW	400mW
15ms Max.	15ms Max.	15ms Max.	15ms Max.	15ms Max.	15ms Max.	15ms Max.	15ms Max.	15ms Max.
8ms Max.	8ms Max.	8ms Max.	8ms Max.	8ms Max.	8ms Max.	8ms Max.	8ms Max.	8ms Max.
8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA	8A / 250VAC; 2000VA
8A/30VDC; 240W	8A/30VDC; 240W	8A/30VDC; 240W	8A/30VDC; 240W	8A/30VDC; 240W	8A/30VDC; 240W	8A/30VDC; 240W	8A/30VDC; 240W	8A/30VDC; 240W
10 <sup>^</sup> 7	10 <sup>^</sup> 7	10 <sup>^</sup> 7	10 <sup>^</sup> 7	10 <sup>^</sup> 7	10 <sup>^</sup> 7	10 <sup>^</sup> 7	10 <sup>^</sup> 7	10 <sup>^</sup> 7
3x10 <sup>^</sup> 4	3x10 <sup>^</sup> 4	3x10 <sup>^</sup> 4	3x10 <sup>^</sup> 4	3x10 <sup>^</sup> 4	3x10 <sup>^</sup> 4	3x10 <sup>^</sup> 4	3x10 <sup>^</sup> 4	3x10 <sup>^</sup> 4
1x10 <sup>^</sup> 4	1x10 <sup>^</sup> 4	1x10 <sup>^</sup> 4	1x10 <sup>^</sup> 4	1x10 <sup>^</sup> 4	1x10 <sup>^</sup> 4	1x10 <sup>^</sup> 4	1x10 <sup>^</sup> 4	1x10 <sup>^</sup> 4
1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)
4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.	4000VAC 1 min.
1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.	1000VAC 1 min.
-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C
-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C	-40°C .. +85°C
5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)
IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
56	56	56	56	56	56	56	56	56
2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>
0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm
any	any	any	any	any	any	any	any	any
APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR	APP/KPR
Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate	Separator plate
463 247	463 247	463 247	463 247	463 247	463 247	463 247	463 247	463 247
25	25	25	25	25	25	25	25	25
KPR-SWE-60VAC/DC-2C (RELAY SOCKET)	KPR-SWE-60VDC-2C (RELAY SOCKET)	KPR-SWE-115VAC/DC-2C (RELAY SOCKET)	KPR-SWE-115VDC-2C (RELAY SOCKET)	KPR-SWF-115VDC-2C (RELAY SOCKET)	KPR-SWE-230VAC/DC-2C (RELAY SOCKET)	KPR-SWE-230VAC-2C (RELAY SOCKET)	KPR-SWF-230VAC/DC-2C (RELAY SOCKET)	KPR-SWF-230VAC-2C (RELAY SOCKET)
Interface relay socket (60VAC/DC)	Interface relay socket (60VDC)	Interface relay socket (115VAC/DC)	Interface relay socket (115VDC)	Interface relay socket with RCZ filter (115VAC/DC)	Interface relay socket (230VAC/DC)	Interface relay socket (230VAC)	Interface relay socket with RCZ filter (230VAC/DC)	Interface relay socket with RCZ filter (230VAC)
272 581	272 585	272 601	272 605	272 607	272 621	272 623	272 627	272 629
10	10	10	10	10	10	10	10	10
2 C/O 48VDC Relay	2 C/O 48VDC Relay	2 C/O 115VDC Relay	2 C/O 115VDC Relay	2 C/O 115VDC Relay	2 C/O 115VDC Relay	2 C/O 115VDC Relay	2 C/O 115VDC Relay	2 C/O 115VDC Relay
Relay for 272 580 and 272 581	Relay for 272 584 and 272 585	Relay for 272 600 and 272 601	Relay for 272 604 and 272 605	Relay for 272 606 and 272 607	Relay for 272 620 and 272 621	Relay for 272 622 and 272 623	Relay for 272 626 and 272 627	Relay for 272 628 and 272 629
095 051	095 051	095 050	095 050	095 050	095 050	095 050	095 050	095 050
50	50	50	50	50	50	50	50	50
TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)	TK-KPR-S (KPR-SCE BRIDGE/8)
Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole	Plug-in bridge for 8 hole
476 900	476 900	476 900	476 900	476 900	476 900	476 900	476 900	476 900
25	25	25	25	25	25	25	25	25
DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T	DG 10/6T
Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays	Terminal Labels for interface relays
505 390	505 390	505 390	505 390	505 390	505 390	505 390	505 390	505 390
360	360	360	360	360	360	360	360	360

# Selection & Ordering Guide

Type	KPR-SWE-6VDC-2C	KPR-SWE-12VAC/ DC-2C	KPR-SWE-12VDC-2C	KPR-SWE-24VAC/ DC-2C	KPR-SWE-24VDC-2C	KPR-SWE-48VAC/ DC-2C	KPR-SWE-48VDC-2C
<p><b>Schematics</b></p>							
<p><b>Dimensional Drawings</b></p>							



KPR-SWE-60VAC/  
DC-2C

KPR-SWE-60VDC-2C

KPR-SWE-115VAC/  
DC-2C

KPR-SWE-115VDC-2C



KPR-SWF-115VAC/  
DC-2C

KPR-SWE-230VAC/  
DC-2C

KPR-SWE-230VAC-2C

KPR-SWF-230VAC/  
VDC-2C

KPR-SWF-230VAC-2C

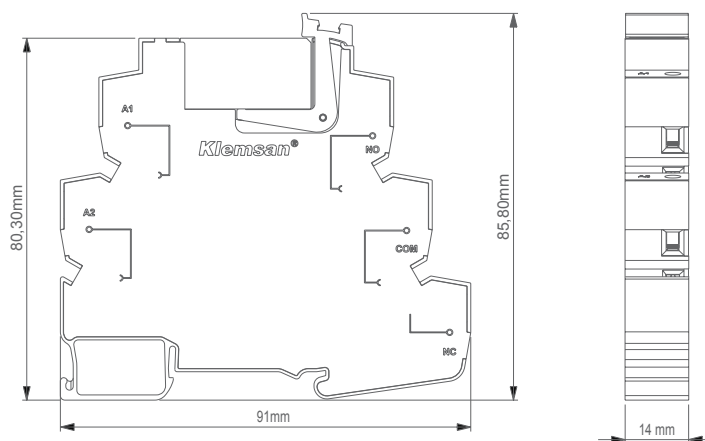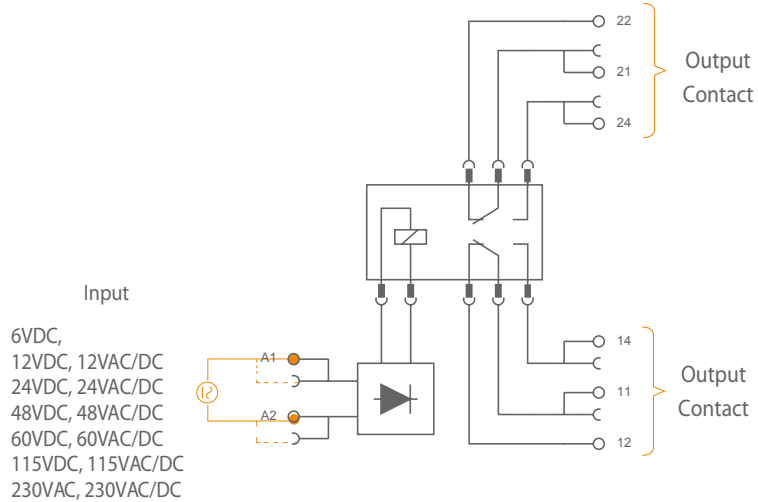

### Defining Interface Relays in simple terms

---

An interface relay is an electromagnetic switch operated by a relatively small electric current that can turn on or off a much larger electric current.

---

### In which fields are they most commonly used?

---

Switching  
Controlling  
Filtering Isolation

An interface relay is an electrically operated **switch** that is used where it is necessary to control a circuit by a low-power signal. It provides complete electrical protective **isolation** between **control** and controlled circuits. **Filtering** AC power input signals in order to prevent leakage current.

---

### In which fields are they most commonly used?

---

- PLC automation systems
  - Industrial Machines
  - Control and protection systems
  - Energy management systems
  - Electric power plants
  - Medium voltage modular systems
-




## Benefits and Advantages

- Wide range of power input from 6 V to 230 V
- AC, DC and AC/DC input voltage options
- Spring clamp connection
- Integrated RCZ filter option
- Saving time with plug-in bridges
- High quality, long life
- Space-saving 6.2 mm design
- LED status indicator to see actual movements of the contacts
- Labelling with terminal block marking equipments
- Highly compact and lightweight
- High level of electromagnetic compatibility (EMC)
- Maximum immunity to interferences
- Self-extinguishing plastic housing

## Layout & Mounting

Klemsan interface relays are suitable for plug-in assembly onto 35 mm standard DIN rails.

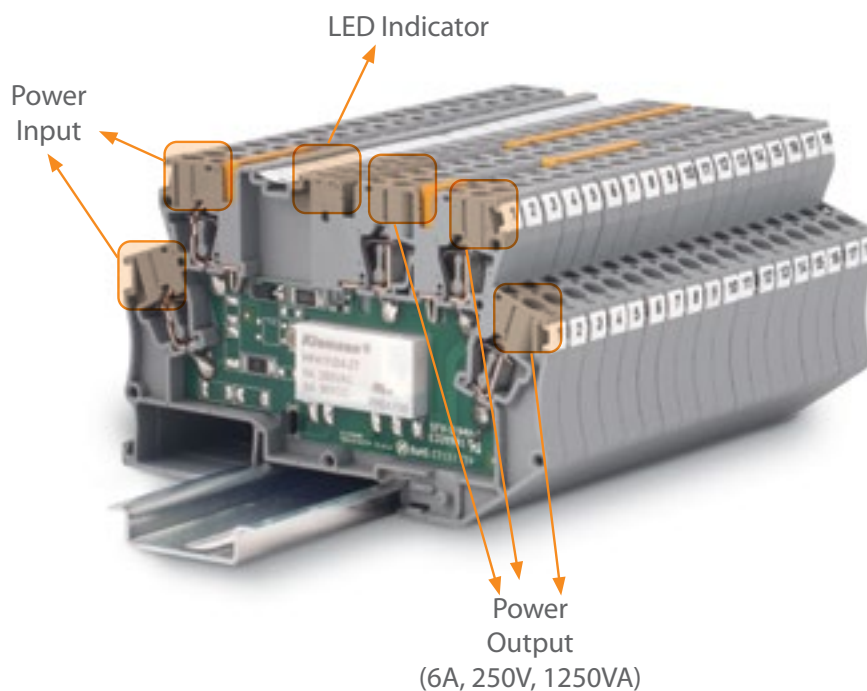

## SCADA System



**I/O CONTROL**  
All models



Extends the lives of PLC outputs by using interface relay to turn many devices on and off simultaneously.

## Under Vibration



**SWITCHING**  
All models



Balances the bad effects of vibration and keep switching with its spring clamp connection. Provides the best solution even under abnormal conditions.

## Voltage Leakages



**FILTRELEME**  
Filtreli Modeller



Thanks to the special filter circuit design, it prevents from on-off actions caused by voltage leakages.





## Tight Cabinets



Only 6.2 mm wide, thus saving considerable space in your enclosures.



**SPACE SAVING**  
*All models*

## Pneumatic Control



Switching currents or voltage too high to handle for PLC outputs.



**AMPLIFICATION**  
*All models*

## Machine Control and Safety




Prevents isolations between input and control circuits.






**ISOLATION**  
*All models*









# Selection & Ordering Guide






								
<b>Module</b>	<b>Type</b>	KPR-CIE-6VDC-1C	KPR-CIE-12VAC/DC-1C	KPR-CIE-12VDC-1C	KPR-CIE-24VAC/DC-1C	KPR-CIE-24VDC-1C	KPR-CIE-48VAC/DC-1C	
	<b>Definition</b>	Integrated Interface relay module	Integrated Interface relay module	Integrated Interface relay module	Integrated Interface relay module	Integrated Interface relay module	Integrated Interface relay module	
	<b>Order Number</b>	271504	271510	271514	271520	271524	271530	
<b>Casing Width(mm)</b>		6.2	6.2	6.2	6.2	6.2	6.2	
<b>Connection</b>		Cage Clamp	Cage Clamp	Cage Clamp	Cage Clamp	Cage Clamp	Cage Clamp	
<b>Packaging unit</b>		10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	
<b>Input</b>	Nominal Voltage(Un)	6VDC	12VAC/DC	12VDC	24VAC/DC	24VDC	48VAC/DC	
	Operating voltage range	0,8 x Un	0,8 x Un	0,8 x Un	0,8 x Un	0,8 x Un	0,8 x Un	
	Release voltage	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	
	Power Consumption	AC		<0.35VA	<0.35VA	<0.35VA	<0.35VA	<0.35VA
		DC	<0.35W	<0.35W	<0.35W	<0.35W	<0.35W	<0.35W
<b>Contact Characteristic</b>	Type	1 C/O	1 C/O	1 C/O	1 C/O	1 C/O	1 C/O	
	Material	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	
	Coil voltage	5VDC	12VDC	12VDC	24VDC	24VDC	24VDC	
	Coil impedance	147x(1± 10%) Ω	147x(1± 10%) Ω	147x(1± 10%) Ω	147x(1± 10%) Ω	147x(1± 10%) Ω	147x(1± 10%) Ω	
	Coil consumption	170mW	170mW	170mW	170mW	170mW	170mW	
	Operate time	10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.	
	Release time	5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.	
	Max. ratings (AC)	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	
	Max. ratings (DC)	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	
	Mechanical life time	10 <sup>^</sup> 7 operations	10 <sup>^</sup> 7 operations	10 <sup>^</sup> 7 operations	10 <sup>^</sup> 7 operations	10 <sup>^</sup> 7 operations	10 <sup>^</sup> 7 operations	
	Electrical life time operations (UL approval, 85°C )	NO	3 × 10 <sup>^</sup> 4 operations	3 × 10 <sup>^</sup> 4 operations	3 × 10 <sup>^</sup> 4 operations	3 × 10 <sup>^</sup> 4 operations	3 × 10 <sup>^</sup> 4 operations	3 × 10 <sup>^</sup> 4 operations
NC		1 × 10 <sup>^</sup> 4 operations	1 × 10 <sup>^</sup> 4 operations	1 × 10 <sup>^</sup> 4 operations	1 × 10 <sup>^</sup> 4 operations	1 × 10 <sup>^</sup> 4 operations	1 × 10 <sup>^</sup> 4 operations	
<b>Isolation resistance</b>		1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	
<b>Dielectric Strength</b>	Between relay coil and contacts	4000VAC 1 min	4000VAC 1 min	4000VAC 1 min	4000VAC 1 min	4000VAC 1 min	4000VAC 1 min	
	Between contacts	1000VAC 1 min	1000VAC 1 min	1000VAC 1 min	1000VAC 1 min	1000VAC 1 min	1000VAC 1 min	
<b>Permissible ambient temperature</b>	During operation	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	
	During storage	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	
<b>Relative Humidity</b>		5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	
<b>Degree of protection</b>		IP20	IP20	IP20	IP20	IP20	IP20	
<b>Weight(gr)</b>		26gr	26gr	26gr	26gr	26gr	26gr	
<b>Max. cable cross-section</b>		2.5mm <sup>2</sup>	2.5mm <sup>3</sup>	2.5mm <sup>3</sup>	2.5mm <sup>3</sup>	2.5mm <sup>3</sup>	2.5mm <sup>3</sup>	
<b>Max. torque</b>		0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	
<b>Permissible mounting position</b>		any	any	any	any	any	any	
<b>Integrated RCZ Filter</b>		x	x	x	x	x	x	

## Accessories and Components

				
<b>Definition</b>	End Plate	Plug in bridge for 2 hole	Plug in bridge for 3 hole	Plug in bridge for 4 hole
<b>Order Number</b>	450389	470112	470113	470114
<b>Package Unit</b>	10 pcs.	25 pcs.	20 pcs.	15 pcs.



							
KPR-CIE-48VDC-1C	KPR-CIE-60VAC/DC-1C	KPR-CIE-60VDC-1C	KPR-CIE-115VAC/DC-1C	KPR-CIE-115VDC-1C	KPR-CIF-115VAC/DC-1C	KPR-CIE-230VAC/DC-1C	KPR-CIE-230VAC/DC-1C
Integrated Interface relay module	Integrated Interface relay module	Integrated Interface relay module	Integrated Interface relay module	Integrated Interface relay module	Integrated Interface relay module	Integrated Interface relay module	Integrated Interface relay module
271534	271540	271544	271550	271554	271556	271560	271562
6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
Cage Clamp	Cage Clamp	Cage Clamp	Cage Clamp	Cage Clamp	Cage Clamp	Cage Clamp	Cage Clamp
10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.
48VDC	60VAC/DC	60VDC	115VAC/DC	115VDC	115VAC/DC	230VAC/DC	230VAC/DC
0,8 x Un	0,8 x Un	0,8 x Un	0,8 x Un	0,8 x Un	0,8 x Un	0,8 x Un	0,8 x Un
0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un	0,2 x Un
<0.35VA	<0.35VA	<0.35VA	<0.35VA	<0.35VA	<0.35VA	<0.35VA	<0.35VA
<0.35W	<0.35W	<0.35W	<0.35W	<0.35W	<0.35W	<0.35W	<0.35W
1 C/O	1 C/O	1 C/O	1 C/O	1 C/O	1 C/O	1 C/O	1 C/O
AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2
24VDC	60VDC	60VDC	60VDC	60VDC	60VDC	60VDC	60VDC
147x(1± 10%) Ω	147x(1± 10%) Ω	147x(1± 10%) Ω	147x(1± 10%) Ω	147x(1± 10%) Ω	147x(1± 10%) Ω	147x(1± 10%) Ω	147x(1± 10%) Ω
170mW	170mW	170mW	170mW	170mW	170mW	170mW	170mW
10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.	10 ms max.
5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.	5 ms max.
6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA	6A/250VAC; 1500VA
6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W	6A/30VDC; 180W
10 <sup>^</sup> 7 operations	10 <sup>^</sup> 7 operations	10 <sup>^</sup> 7 operations	10 <sup>^</sup> 7 operations	10 <sup>^</sup> 7 operations	10 <sup>^</sup> 7 operations	10 <sup>^</sup> 7 operations	10 <sup>^</sup> 7 operations
3 × 10 <sup>^</sup> 4 operations	3 × 10 <sup>^</sup> 4 operations	3 × 10 <sup>^</sup> 4 operations	3 × 10 <sup>^</sup> 4 operations	3 × 10 <sup>^</sup> 4 operations	3 × 10 <sup>^</sup> 4 operations	3 × 10 <sup>^</sup> 4 operations	3 × 10 <sup>^</sup> 4 operations
1 × 10 <sup>^</sup> 4 operations	1 × 10 <sup>^</sup> 4 operations	1 × 10 <sup>^</sup> 4 operations	1 × 10 <sup>^</sup> 4 operations	1 × 10 <sup>^</sup> 4 operations	1 × 10 <sup>^</sup> 4 operations	1 × 10 <sup>^</sup> 4 operations	1 × 10 <sup>^</sup> 4 operations
1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)	1000MΩ (500VDC)
4000VAC 1 min	4000VAC 1 min	4000VAC 1 min	4000VAC 1 min	4000VAC 1 min	4000VAC 1 min	4000VAC 1 min	4000VAC 1 min
1000VAC 1 min	1000VAC 1 min	1000VAC 1 min	1000VAC 1 min	1000VAC 1 min	1000VAC 1 min	1000VAC 1 min	1000VAC 1 min
-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C
-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C
5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)	5% .. 85% (no condensation)
IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
26gr	26gr	26gr	26gr	26gr	26gr	26gr	26gr
2.5mm3	2.5mm3	2.5mm3	2.5mm3	2.5mm3	2.5mm3	2.5mm3	2.5mm3
0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm	0.4Nm
any	any	any	any	any	any	any	any
x	x	x	x	x	Available	x	Available

				
Plug in bridge for 5 hole	Plug in bridge for 10 hole	DG 6/5 - Label	DB 5 - Label	11.2 Strip label
470115	470119	505330	505850	1020100
10 pcs.	5 pcs.	440 pcs.	500 pcs.	1 pc.

**NOTE:** This product is only compatible with below items:  
-112710N -112720N -112730N

### Defining OPK-EKI modules in simple terms

OPK-EKI is an optocoupler module that uses a short optical transmission path to transfer an electrical signal between circuits or elements of a circuit, while keeping them electrically isolated from each other. They can be used to switch loads like mechanical relays but they are much more than simply switching...

### In which fields are they most commonly used?

Switching  
prevents inrush current  
Controlling  
Driving Isolation

OPK-EKI module is an electrically operated **switch** that is used where it is necessary to **control** a circuit by a low-power signal.

The main purpose of an optocoupler is to prevent rapidly changing voltages or high voltages on one side of a circuit from distorting transmissions or damaging components on the other side of the circuit. It uses light waves to provide complete electrical **isolation** between control and controlled circuits while transferring an electrical signal.

Zero volt switching circuit **prevents inrush current** so loads can be switched more stable.

**High side and low side** switching option allows **driving** a load in two different ways.

### In which fields are they most commonly used?

- PLC automation systems
- Industrial Machines
- Control and safety systems
- Energy management systems
- Electric power plants
- Medium voltage modular cabinets




## Benefits and Advantages

- A wide range of voltage input from 5V to 220V
- Providing high switching frequency due to short switch-on and switch-off times
- Long service life
- Quite working
- No contact arching
- Resistant to vibration and shock
- Preventing inrush current
- High side and low side switching options
- AC and DC load switching options
- Cage clamp connection
- Saving space with 6.2mm design
- Saving wiring time with plug-in bridges
- LED status indicator in order to see actual movement of the contacts
- Self-Extinguishing plastic housing
- Labeling with terminal block marking materials

## Layout & Mounting

Klemsan interface relays are suitable for plug-in assembly onto 35 mm standard DIN rails.

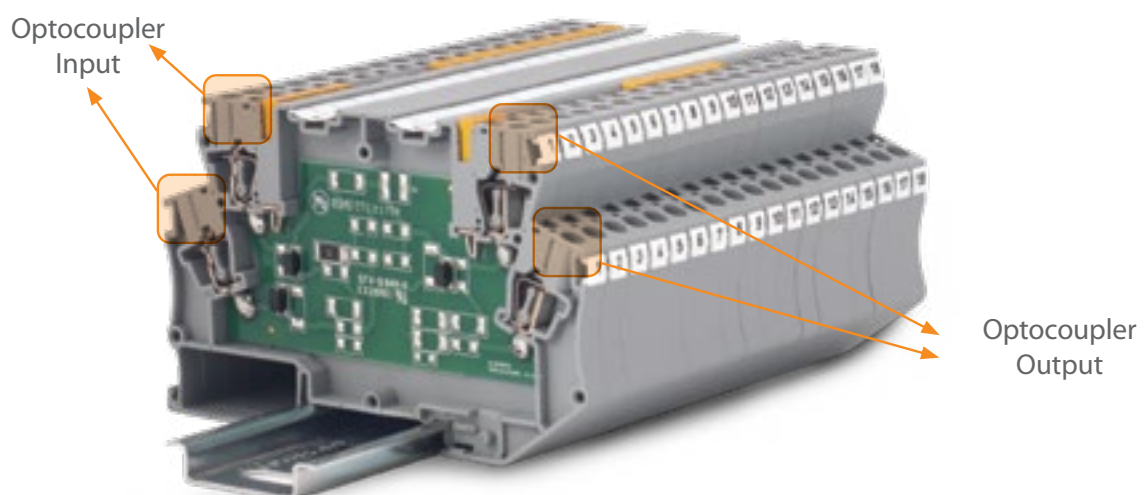

### Industrial Applications



**ISOLATION and  
AMPLIFICATION**  
All models



Optocoupler modules are used in industrial environments where high voltages, magnetic fields and noise are commonly present, reliability is critical to avoid downtime and ensure data accuracy. In this environment circuit designers use optocouplers to insulate high voltages and isolate unwanted signals.

Klemsan presents OPK-EKI modules that are designed to meet the stringent requirements of industrial applications.

### Under Vibration



**SWITCHING**  
All models



Klemsan OPK-EKI modules compensate the bad effects of vibration and shock and continue to switch current and voltage thanks to their cage clamp connection and having no moving parts like electromechanical relays.

They ensure continuous and uninterrupted operation for any system.



## Solid State Relay Applications

**I/O CONTROL**

*All models*



OPK-EKI modules can be used instead of solid state relays due to high switching frequency, short switch-on and switch-off times, no contact bouncing, silent switching and long operation.

## Narrow Cabinets



**SPACE SAVING**









*All models*







Only 6.2 mm wide, thus saving considerable space in your enclosures. OPK-EKI modules are particularly suitable for the modification and extension of equipment and machinery, where it helps to make optimum use of the limited space available in switchgear cabinets.

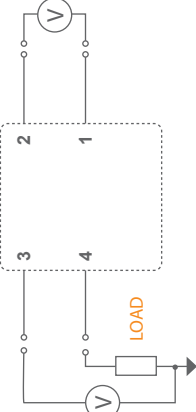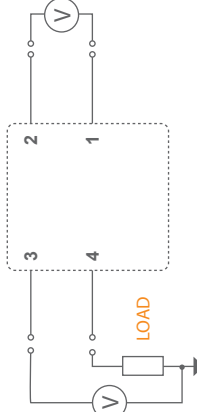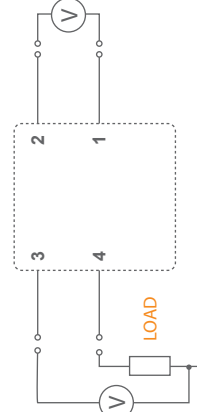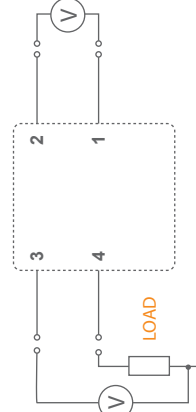

# Selection & Ordering Guide













					
<b>Pre-assembled module (relay + socket)</b>	<b>Type</b>	<b>OPK - EKI 5 VAC/DC</b>	<b>OPK - EKI 12 VAC/DC</b>	<b>OPK - EKI 24 VAC/DC</b>	<b>OPK - EKI 48 VAC/DC</b>
	Definition	Optocoupler module	Optocoupler module	Optocoupler module	Optocoupler module
	Order Number	112010N	112110N	112220N	112320N
<b>Width/Depth/ Height (mm)</b>		6.2/56/81.9	6.2/56/81.9	6.2/56/81.9	6.2/56/81.9
<b>Connection</b>		Cage clamp	Cage clamp	Cage clamp	Cage clamp
<b>Packaging unit</b>		1 pc.	1 pc.	1 pc.	1 pc.
<b>Mounting</b>		Rail Mount	Rail Mount	Rail Mount	Rail Mount
<b>Input</b>	Input Voltage	5V AC/DC	12V AC/DC	24V AC/DC	48V AC/DC
<b>Output</b>	Switching Voltage Range	5-48V DC	5-48V DC	5-48V DC	5-48V DC
	Maximum Switching Current	0.65A DC	0.65A DC	0.65A DC	0.65A DC
<b>Switching Type</b>		High Side	High Side	High Side	High Side
<b>Zero volt switching circuit</b>		-	-	-	-
<b>Response time</b>		<10msec	<10msec	<10msec	<10msec
<b>Schematics</b>					






## Accessories and Components

				
<b>Definition</b>	End Plate	Plug in bridge for 2 hole	Plug in bridge for 3 hole	Plug in bridge for 4 hole
<b>Order Number</b>	450389	470112	470113	470114
<b>Package Unit</b>	10 pcs.	25 pcs.	20 pcs.	15 pcs.

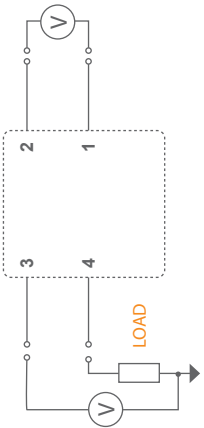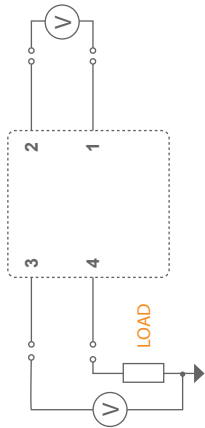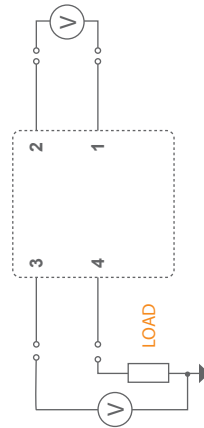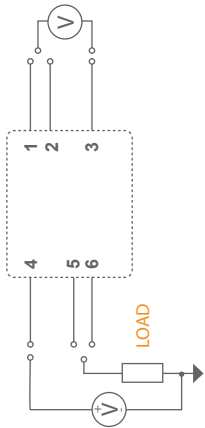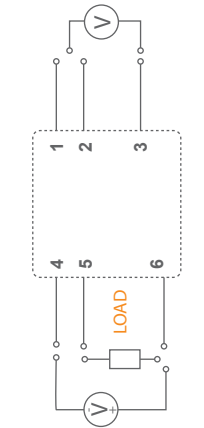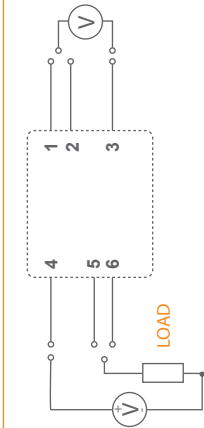



























					
OPK - EKI 60 VAC/DC	OPK - EKI 110 VAC/DC	OPK - EKI 220 VAC/DC	OPK - EKI 9-72 VDC	OPK - EKI 9-72 VDC	OPK - EKI 9-72 VDC
Optocoupler module	Optocoupler module	Optocoupler module	Optocoupler module	Optocoupler module	Optocoupler module
112420N	112520N	112620N	112710N	112720N	112730N
6.2/56/81.9	6.2/56/81.9	6.2/56/81.9	6.2/56/81.9	6.2/56/81.9	6.2/56/81.9
Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp
1 pc.	1 pc.	1 pc.	1 pc.	1 pc.	1 pc.
Rail Mount	Rail Mount	Rail Mount	Rail Mount	Rail Mount	Rail Mount
60V AC/DC	110V AC/DC	220V AC/DC	9-72V DC	9-72V DC	9-72V DC
5-48V DC	5-48V DC	5-48V DC	3-30V DC	3-30V DC	24-260V AC
0.65A DC	0.65A DC	0.65A DC	5A DC	5A DC	0.5A AC
High Side	High Side	High Side	High Side	Low Side	High Side
-	-	-	-	-	available
<10msec	<10msec	<10msec	<500µsec	<500µsec	<500µsec
					





				
Plug in bridge for 5 hole	Plug in bridge for 10 hole	DG 6/5 - Label	DB 5 - Label	11.2 Strip label
470115	470119	505330	505850	1020100
10 pcs.	5 pcs.	440 pcs.	500 pcs.	1 pc.
				<b>NOTE:</b> This product is only compatible with below items: -112710N -112720N -112730N

# Selection & Ordering Guide

							
Module	Type	WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI
	Definiton	Reverse Current Protection	Reverse Current Protection	Reverse Current Protection	Reverse Current Protection	Lamp / Test Circuit	Lamp / Test Circuit
	Order Number	110010N	110020N	110030N	110040N	110050N	110060N
<b>Casing Width (mm)</b>		6.2	6.2	6.2	6.2	6.2	6.2
<b>Connection</b>		Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp
<b>Packing Unit</b>		10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.
<b>Nominal Voltage</b>		x	x	x	x	x	x
<b>Diode Coltage</b>		1000V	1000V	1000V	1000V	1000V	1000V
<b>Diode Voltage Drop</b>		0,7V	0,7V	0,7V	0,7V	0,7V	0,7V
<b>Degree of Protection</b>		IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
<b>Weight</b>		19.8gr	19.8gr	19.8gr	19.8gr	19.8gr	19.8gr
<b>Diode Current</b>		1A	1A	1A	1A	1A	1A
<b>Circuit Diagram</b>							

							
Module	Type	WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI
	Definiton	Voltage Indicator	Voltage Indicator	Voltage Indicator	Voltage Indicator	Voltage Indicator + Flyback Diode	Voltage Indicator + Flyback Diode
	Order Number	110160N	110170N	110180N	110190N	110200N	110210N
<b>Casing Width (mm)</b>		6.2	6.2	6.2	6.2	6.2	6.2
<b>Connection</b>		Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp
<b>Packing Unit</b>		10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.
<b>Nominal Voltage</b>		220VDC	24VDC	110VDC	220VDC	24VDC	24VDC
<b>Diode Coltage</b>		1000V	1000V	1000V	1000V	1000V	1000V
<b>Diode Voltage Drop</b>		0,7V	0,7V	0,7V	0,7V	0,7V	0,7V
<b>Degree of Protection</b>		IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
<b>Weight</b>		19.8gr	19.8gr	19.8gr	19.8gr	19.8gr	19.8gr
<b>Diode Current</b>		1A	1A	1A	1A	1A	1A
<b>Circuit Diagram</b>							

## Accessories and Components

				
<b>Definition</b>	End Plate	Plug in bridge for 2 hole	Plug in bridge for 3 hole	Plug in bridge for 4 hole
<b>Order Number</b>	450389	470112	470113	470114
<b>Package Unit</b>	10 pcs.	25 pcs.	20 pcs.	15 pcs.




WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI
Reverse Current Protection	Reverse Current Protection	Lamp / Test Circuit	Lamp / Test Circuit	Lamp / Test Circuit	Lamp / Test Circuit	Lamp / Test Circuit	Voltage Indicator	Voltage Indicator
110070N	110080N	110090N	110100N	110110N	110120N	110130N	110140N	110150N
6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp
10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.
x	x	x	x	x	24VAC/DC	24VAC/DC	24VDC	110VDC
1000V	1000V	1000V	1000V	1000V	1000V	1000V	1000V	1000V
0,7V	0,7V	0,7V	0,7V	0,7V	0,7V	0,7V	0,7V	0,7V
IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
19.8gr	19.8gr	19.8gr	19.8gr	19.8gr	19.8gr	19.8gr	19.8gr	19.8gr
1A	1A	1A	1A	1A	1A	1A	1A	1A

WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI	WG-EKI
Voltage Indicator	Voltage Indicator	Voltage Indicator	Voltage Indicator	Voltage Indicator + Rectifier	Voltage Indicator + Rectifier	Voltage Indicator + Rectifier	Terminal with Cross Connection	Voltage Divider
110270N	110280N	110290N	110300N	110310N	110320N	110330N	110380N	110410N
6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp	Cage clamp
10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.	10 pcs.
24VAC/DC	48VAC/DC	110VAC/DC	220VAC/DC	24VAC/DC	110VAC/DC	220VAC/DC	X	24VAC/DC
1000V	1000V	1000V	1000V	1000V	1000V	1000V	1000V	1000V
0,7V	0,7V	0,7V	0,7V	0,7V	0,7V	0,7V	0,7V	0,7V
IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
19.8gr	19.8gr	19.8gr	19.8gr	19.8gr	19.8gr	19.8gr	19.8gr	19.8gr
1A	1A	1A	1A	1A	1A	1A	1A	1A

Plug in bridge for 5 hole	Plug in bridge for 10 hole	DG 6/5 - Label	DB 5 - Label	11.2 Strip label
470115	470119	505330	505850	1020100
10 pcs.	5 pcs.	440 pcs.	500 pcs.	1 pc.
<p><b>NOTE:</b> This product is only compatible with below items: -112710N -112720N -112730N</p>				



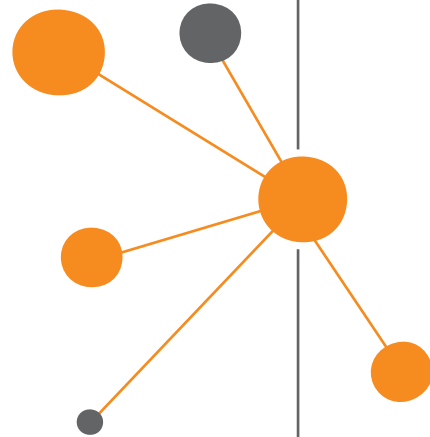

# Communication

## Management Solutions

*Made **to** communicate*

## Defining an ethernet gateway in simple terms

An ethernet gateway is an automation device which converts between serial to ethernet, GPRS or WI - FI protocols in order to monitor and control serial devices.

## In which fields are they most commonly used?

Converting the data  
Fast data transmission  
Querying simultaneously  
Bidirectional working  
Protective Isolation  
Dual-mode configuration  
Ping blocking  
Auto-learning IP address

An ethernet gateway covers the data between different protocols and supports system integrators by ensuring a consistent flow of information throughout the entire facility. Etor, Wtor and Gtor gateway provides fast data transmission for serial devices up to 115Kbps. Simultaneous queries that belong to 6 different users can be replied by 64 slave devices over one Etor-4, Gtor and Wtor gateway. It is possible to control serial devices over internet network(server mode) or ethernet based devices over serial interface(client mode) thanks to bidirectional working feature. The integrated galvanic isolation between ethernet, modbus and supply parts provides line protection against over voltage and the anti-noise circuit eliminates the effects of EMI. It has the ability to be configured over USB or Web server thanks to dual-mode configuration. Ping queries from unauthorized people can be prevented thus your network can be secured, thanks to ping blocking feature. Auto-learning IP address feature allows you to adopt ethernet gateway ETOR to your system more easily.

## In which fields are they most commonly used?

- Electrical power plants and substations
- PLC-Scada applications
- Submetering station
- Building automation
- Food and agriculture industry
- Railway automation
- Machine tool industry
- IT centres
- Alarm station
- Production line management



## Benefits and Advantages

- First class quality to fulfill all your communication needs
- Quick view of status with leds
- Line protection by galvanic isolation
- Isolates noise on Remote I/O cable for improved communications
- Bidirectional protocol converting; client and server mode
- Ethernet-RS485 and Ethernet-RS232 options
- Supports 6 simultaneous TCP masters with up to 64 simultaneous serial slave devices
- Multi-Slave gateway solutions for large data transfers
- Converting between Modbus TCP and Modbus RTU/ASCII
- Easy configuration over USB or Web Server
- User friendly configuration software
- 300-115200 bps baudrate adjustment
- Dual supply option: 18-50VAC/DC or can be powered up through a mini USB cable
- Automatic or manual IP addressing
- Ping blocking
- High mechanical endurance
- Sleek 17.5mm wide housing and compact design saves panel space.
- Perfect to fit in modular enclosure
- Self-Extinguishing plastic housing
- High level of Electromagnetic compatibility (EMC) i.e. maximum immunity to interferences.

## Layout & Mounting

Klemsan interface relays are suitable for plug-in assembly onto 35 mm standard DIN rails.



*ETOR-4 Ethernet Gateway - WTOR WI - FI Gateway - GTOR GPRS Gateway*

## Data Center Management



Efficiency of IT infrastructure depends on accessing, monitoring, and managing IT equipment remotely. Although some equipments may be installed in data center, supporting remote offices, factory floors or other unattended locations, is also important. Many devices have a serial port for making configuration changes or uploading new firmware. However, visiting remote equipment cabinets with a serial cable and laptop is a time-consuming and expensive task. KLEMSAN gateways bridge the distance between remote IT equipment and data center. Costs and cut downtime can be reduced by allowing remote access.



**ETHERNET  
GATEWAY**

*ETOR-4, ETOR-2,  
GTOR, WTOR*

## Wastewater Treatment Plants



Because of the dynamic nature of many water treatment systems and the worldwide need for improved reliability and quality, a higher degree of precision is required in the monitoring and control of water treatment programs than that obtained through manual monitoring. To achieve the degree of precision needed, continuous on-line monitoring with automatic instrumentation is required. Some engineers use radio modems to collect RTU system data in Modbus RTU format. However, since most SCADA monitors use Modbus TCP for remote monitoring, a gateway is used to connect the two protocols.



**ETHERNET  
GATEWAY**

*ETOR-4, GTOR,  
WTOR*

## Factory Automation



TCP/IP is widely used in many electrical systems for remote monitoring to ensure reliable performance and energy control.

Although systems and equipments can often be managed from the network itself, such access may not always be possible. The problem comes when such equipment doesn't support TCP/IP protocol. It is an option to modify these devices with TCP/IP versions but it may be too expensive and sometimes not possible. Fortunately, most of electrical devices, computers, equipments provide a serial port for local access. Users are able to have access from anywhere, just as if they were connected locally through a serial connection. So that's why gateways have become a popular way to achieve TCP/IP requirements.



**ETHERNET  
GATEWAY**

*ETOR-4, ETOR-2,  
WTOR, GTOR*

## Power Generation System



Generally, power plants have their own generation system in order to provide uninterrupted power supply. It is highly important to get data continuously from power RTUs, smart electronic devices, energy measuring devices which support serial communication and transmit them to TCP network which is required to reach those information from anywhere in the world. At this point, Etor gateways present best solution between serial devices and TCP network.



**ETHERNET  
GATEWAY**

*ETOR-4, ETOR-2,  
WTOR*





## Industrial Motors



The consumption of industrial motors should be monitored carefully by energy meters that are located throughout the facility because they use a significant amount of energy, with many factories spending 70% of their total production budget on this expense. Generally meters support Modbus RTU protocol so the data from the meters is transmitted via an industrial gateway to a Modbus TCP network and monitored in any place in the world.



**ETHERNET GATEWAY**  
ETOR-4, ETOR-2,  
GTOR, WTOR

## Energy Metering Applications



These days most of energy meters support RS232 or RS485 communication protocols. Human efforts and wasted time that are spent for meter readings can be reduced by using remote monitoring system and Etor gateway.



**ETHERNET GATEWAY**  
ETOR-4, ETOR-2,  
GTOR, WTOR

## Multi-User & Multi-Device Applications



Ethernet is a general purpose communication protocol that is very fast, can be used for any purpose and can be found anywhere in the world. 6 users located from different places can connect to one gateway simultaneously and communicate up to 64 serial devices over one gateway. So ethernet gateway presents cost-effective solution for IP-based systems which are growing at an exponential rate nowadays.



**ETHERNET GATEWAY**  
ETOR-4, WTOR

## Wind & Solar Power Plants



Renewable energy power plants are required to be monitored in long distance because of their locations. In order not transmission distance to become a problem, data should be transmitted through the ethernet gateways over TCP/IP protocol which provides safe, reliable and fast communication all over the world.



**ETHERNET GATEWAY**  
ETOR-4, GTOR,  
WTOR

## Oil and Gas Automation



For most oil and gas industries, the need for accurate, real-time information obtained through a SCADA system is crucial. These industrial facilities are looking for ways to improve efficiencies in data communication by connecting serial devices which support RS485 or RS232 protocols. KLEMSAN gateways can be used to optimize efficiency, productivity, reliability, and safety at any stage of oil and gas production.



**ETHERNET GATEWAY**  
ETOR-4, ETOR-2,  
GTOR, WTOR

# Selection & Ordering Guide








Type	ETOR-4		ETOR-2
<b>Definiton</b>	Ethernet gateway (TCP/IP - RS485)		Ethernet gateway (TCP/IP - RS232)
<b>Order Number</b>	601400		601401
<b>Casing Width(mm)</b>	17.5		17.5
<b>Connections</b>	Screw terminal (for supply and serial interface)		Screw terminal (for supply and serial interface)
<b>General Information</b>	Working Mode		Server or Client selectable (Bidirectional)
	Configuration		Mini USB port or WEB interface
	DHCP (Automatic IP Receive)		Available
	ARP		Available
	Ping blocking		Available
	LED indicators		Available
	Reset Function		Available
	ESD protection		Available
<b>Ethernet Interface</b>	Driver Supported		Windows® XP/Vista/7/8/8.1
	Number of Ports		1
	Operation Modes		Modbus TCP, Modbus RTU over TCP, Modbus ASCII over TCP
	Number of Remote Connections	Server mode	6
		Client mode	1
Connector		RJ45	
Data Transmission Rate		10/100 Base-TX	
<b>Serial Interface</b>	Number of Ports		1
	Operation Modes		MODBUS RTU, MODBUS ASCII
	Serial Standard		RS485
	Number of Serial Devices	Server mode	64
		Client mode	1
	Serial Communication Parameters	Baud Rate	300 to 115200 bps
		Data Bit	8
Stop Bits		1 or 2	
Parity		None, Even, Odd	
<b>Supply</b>	Voltage	AC	18-50V
		DC	18-50V
	Consumption	AC	< 2.2VA
		DC	< 1.2W
Frequency		45-65Hz	
<b>Galvanic Isolation</b>	Supply- Ethernet port		1500VRMS, 2250VDC
	Supply- Serial port		1500VRMS, 2250VDC
	Serial port-Ethernet port		2500VRMS
<b>Mechanical Properties</b>	Weight(g)		58
	Protection Class		IP20
	Assembly Type		Rail Mount
	Permissible mounting position		Any
<b>Ambient Conditions</b>	Operating Temperature		-10 to +60 °C
	Storage Temperature		-30 to +80 °C
	Relative Humidity (no condensation)		Max.95%




ETOR-4 (with external power supply)	ETOR-2 (with external power supply)
Ethernet gateway (TCP/IP - RS485)	Ethernet gateway (TCP/IP - RS232)
601402	601403
17.5	17.5
Screw terminal (for supply and serial interface)	Screw terminal (for supply and serial interface)
Server or Client selectable (Bidirectional)	Server or Client selectable (Bidirectional)
Mini USB port or WEB interface	Mini USB port or WEB interface
Available	Available
Available	Available
Available	Available
Available	Available
Available	Available
Available	Available
Windows® XP/Vista/7/8/8.1	Windows® XP/Vista/7/8/8.1
1	1
Modbus TCP, Modbus RTU over TCP, Modbus ASCII over TCP	Modbus TCP, Modbus RTU over TCP, Modbus ASCII over TCP
6	6
1	1
RJ45	RJ45
10/100 Base-TX	10/100 Base-TX
1	1
MODBUS RTU, MODBUS ASCII	MODBUS RTU, MODBUS ASCII
RS485	RS232
64	1
1	1
300 to 115200 bps	300 to 115200 bps
8	8
1 or 2	1 or 2
None, Even, Odd	None, Even, Odd
18-50V	18-50V
18-50V	18-50V
< 2.2VA	< 2.2VA
< 1.2W	< 1.2W
45-65Hz	45-65Hz
1500VRMS, 2250VDC	1500VRMS, 2250VDC
1500VRMS, 2250VDC	1500VRMS, 2250VDC
2500VRMS	2500VRMS
58	58
IP20	IP20
Rail Mount	Rail Mount
Any	Any
-10 to +60 °C	-10 to +60 °C
-30 to +80 °C	-30 to +80 °C
Max.95%	Max.95%

# Selection & Ordering Guide

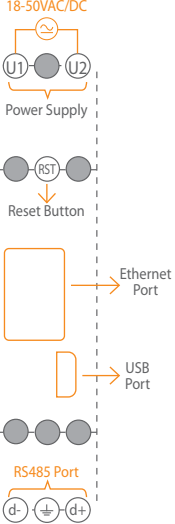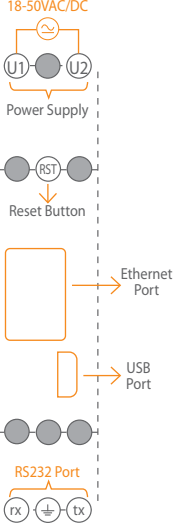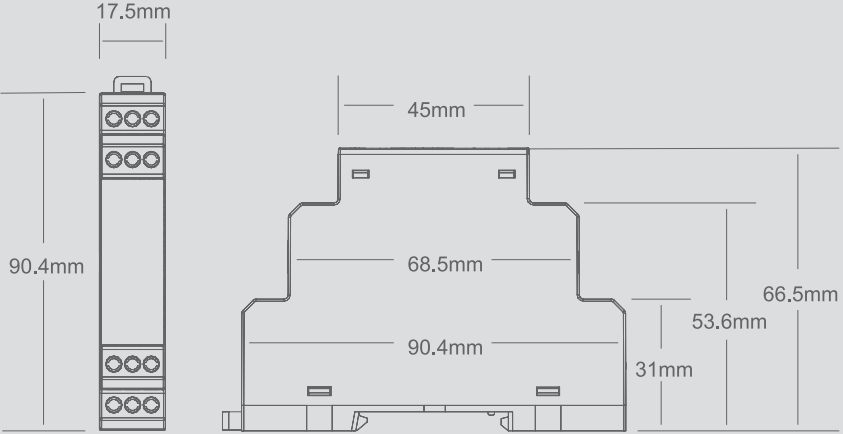Type		ETOR-4	ETOR-2
Accessories	Mini USB Cable 	Available	Available
	External Power Supply (220/110VAC to 24VDC) 		
Schematics			
Dimensional Drawings			




ETOR-4 (with external power supply)	ETOR-2 (with external power supply)
Available	Available
Available	Available

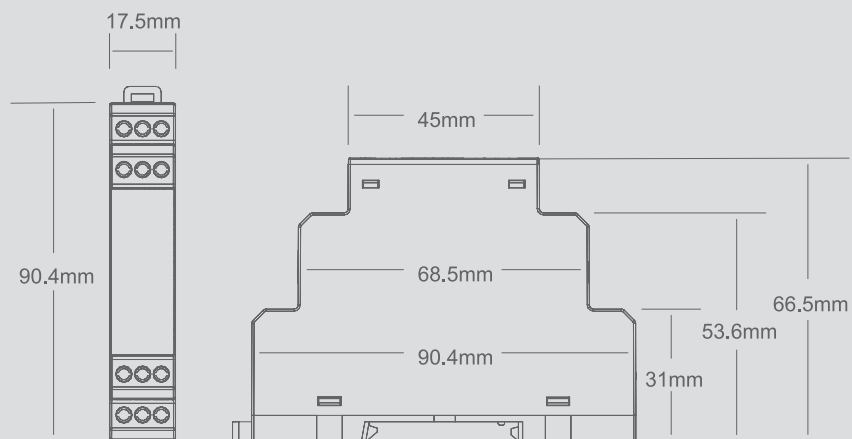

## ETOR-4 / Ethernet-RS485 Bidirectional Converting


### Server Mode

When running in the server mode; ETOR-4 converts the MODBUS TCP, MODBUS RTU over TCP and MODBUS ASCII over TCP queries to MODBUS RTU and MODBUS ASCII queries and transmits these queries to the serial devices. After that, it converts the responses which are received by slave devices, then transmits them to master devices. 6 TCP masters and 64 serial devices can be communicated simultaneously over one Etor-4 gateway in server mode.

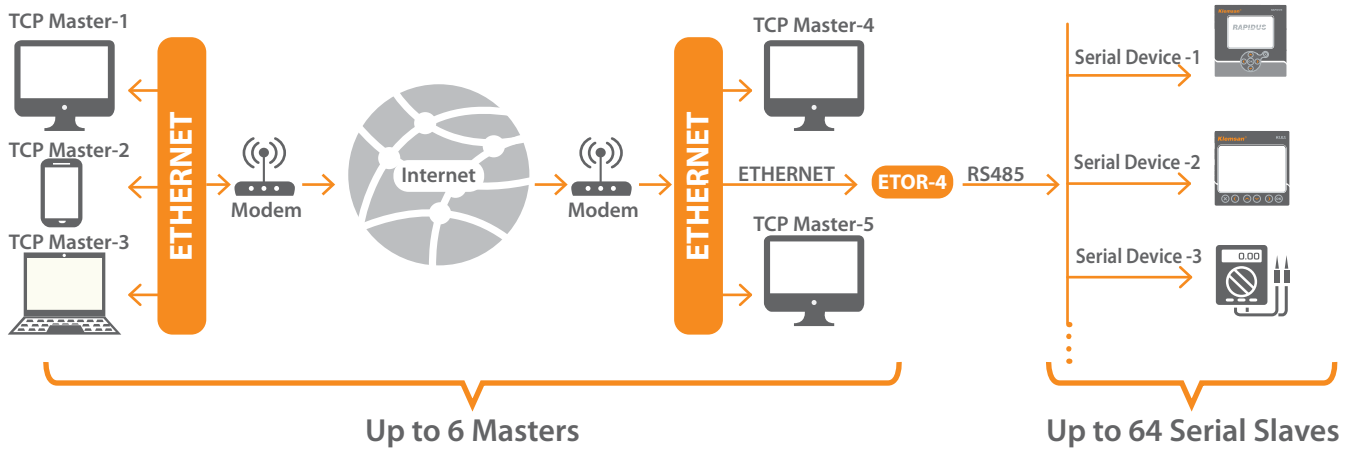

### Client Mode

When running in the client mode; ETOR-4 converts the MODBUS RTU and MODBUS ASCII queries to MODBUS TCP, MODBUS RTU over TCP and MODBUS ASCII over TCP queries and transmits these queries to the remote device which is connected to the internet or the local network. After that, it converts the responses which are received by slave devices, then transmits them to master devices. 1 TCP master and 1 serial device can be communicated simultaneously over one Etor-4 gateway in client mode.

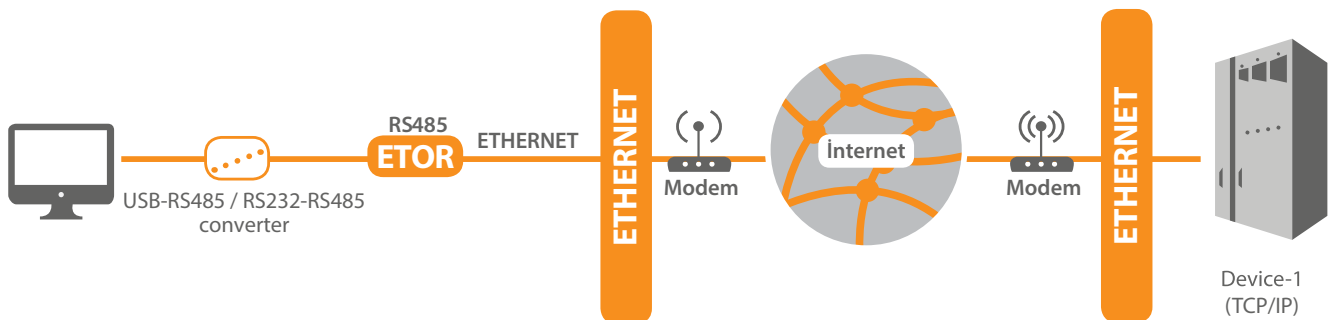




ETOR-2 / Ethernet-RS232 Bidirectional Converting


**Server Mode**

When running in the server mode; ETOR-2 converts the MODBUS TCP, MODBUS RTU over TCP and MODBUS ASCII over TCP queries to MODBUS RTU and MODBUS ASCII queries and transmits these queries to the serial device. After that, it converts the responses which are received by slave device, then transmits them to master devices. 6 TCP masters and 1 serial device can be communicated simultaneously over one Etor-2 gateway in server mode.

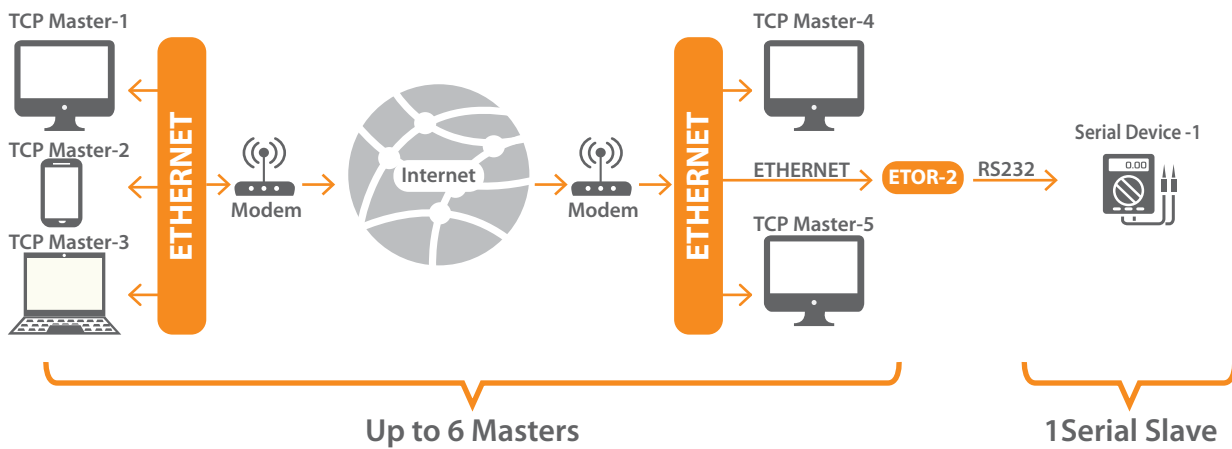

**Client Mode**


When running in the client mode; ETOR-2 converts the MODBUS RTU and MODBUS ASCII queries to MODBUS TCP, MODBUS RTU over TCP and MODBUS ASCII over TCP queries and transmits these queries to the remote device which is connected to the internet or the local network. After that, it converts the responses which are received by slave device, then transmits them to master device. 1 TCP master and 1 serial device can be communicated simultaneously over one Etor-2 gateway in client mode.

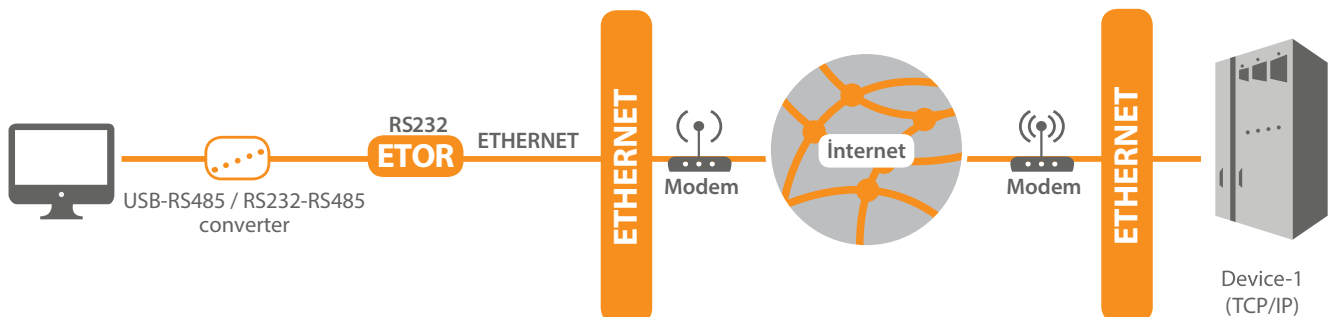

GTOR series products connect to serial MODBUS devices with TCP / IP based systems via GPRS service. In this way, it is possible to remotely control and monitor serial devices connected to MODBUS network via GPRS service. GTOR can be easily integrated into existing MODBUS networks thanks to their wide range of configuration options. GTOR series products work as a TCP / IP server. GTOR is user friendly with easy to configure and free interface program.

- Micro SIM Card
- Free user interface program
- RS485 interface
- 17,5mm width
- 8 LED indicators
- APN configuration with Mini USB
- Supports all operators
- Supports up to 64 devices

It provides configuration via USB or TCP / IP using GPRS service. The on-screen LED shows a lot of information such as power, signal strength level, operating status.

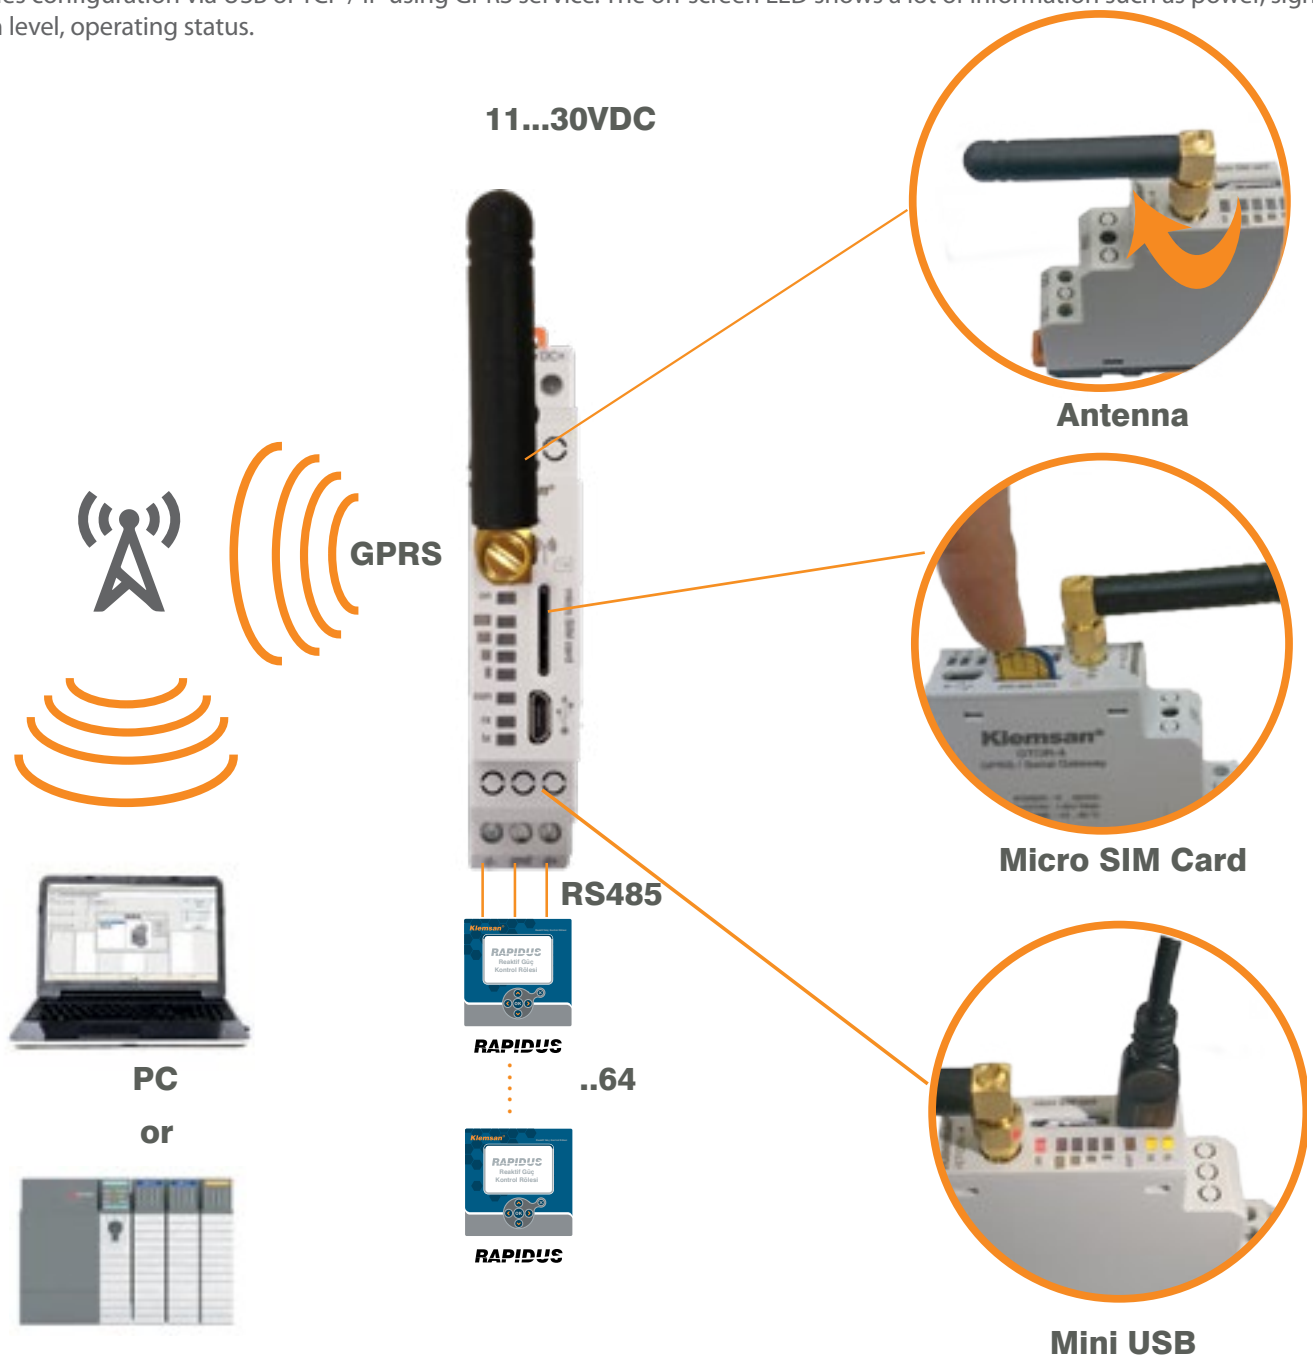









## Selection & Ordering Guide



Type		GTOR		GTOR(with power supply)			
Definition		GPRS Gateway		GPRS Gateway			
Order Number		601 440		601 441			
Casing Width(mm)		17,5mm		17,5mm			
Connections		Screw Terminal		Screw Terminal			
Mounting		Rail Mount		Rail Mount			
General Information		Configuration		Configurable via USB Micro USB Connection Interface			
		IP Based Security		√			
		LED Indicators		√			
		Reset Function		√			
		ESD Protection		√			
		Supported Drivers		WindowsXP/Vista/7/8/10		WindowsXP/Vista/7/8/10	
GPRS Interface		SIM/USIM		3V/1.8V			
		Quad Band		850/900/1800/1900MHz			
		GPRS Multi Slot Class		Downlink		Class 12 85.6kbps	
				Uplink		Class 12 85.6kbps	
		GPRS Mobile Station		Class B		Class B	
Compliant to GSM Phase 2/2+		Class 4 (2W @850/900MHz) Class 1 (1W @1800/1900MHz)		Class 4 (2W @850/900MHz) Class 1 (1W @1800/1900MHz)			
Serial Interface		Number of Port		1			
		Serial Connection Standard		RS485			
		Number of Serial Connection Devices		Server Mode		32	
				Client Mode		1	
		Serial Connection Parameters		Baud Rate		Between 600 - 57600 bps	
				Data Bit		8	
				Stop Bit		1 or 2	
Parity				None, even, odd			
Supported Protocols		MODBUS TCP; MODBUS RTU via TCP; MODBUS ACII via TCP		MODBUS TCP; MODBUS RTU via TCP; MODBUS ACII via TCP			
Voltage Supply		Voltage		DC			
				AC			
		Frequency		45-65Hz			
Isolation		1.5kV RMS		1.5kV RMS			
Permissible Ambient Temperature		During Operation		-10°C...+60°C			
		During Storage		-30°C...+80°C			
Relative Humidity		Max.95% (no condensation)		Max.95% (no condensation)			
Operating Frequency		45-65Hz		45-65Hz			
Degree of Protection		IP20		IP20			
Power Consumption		DC		1.2W			
		AC		-			

# Selection & Ordering Guide

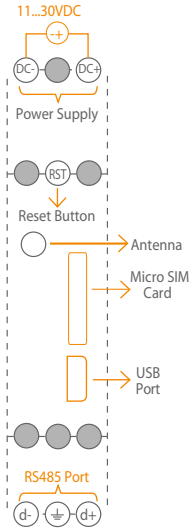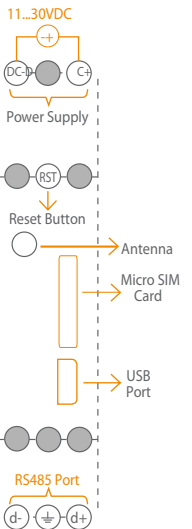Tip		GTOR	GTOR (with power supply)
Accessories	Mini USB Cable 	Available	Available
	Antenna 	Available	Available
	High gain antenna 	Available	Available
	External Power Supply (220/110VAC to 24VDC) 	-	Available
Schematics	Schematics		
		Dimensional Drawings	Dimensional Drawings




WTOR-4 / WI - FI to RS485 Gateway

WTOR series products connect to serial MODBUS devices with TCP / IP based systems via WI-FI service. In this way, it is possible to remotely control and monitor serial devices connected to MODBUS network via WI-FI service. WTOR can be easily integrated into existing MODBUS networks thanks to their wide range of configuration options. WTOR series products works as a TCP / IP server.

- Operating with Access
- Point or Station mode
- Configuring via web interface
- RS485
- 4 pcs. led indication
- Supports up to 64 devices
- 17,5mm wide


It provides configuration via web interface. The on-screen LED shows a lot of information such as power, mode information, operating status.

AP(Access Point) Mode

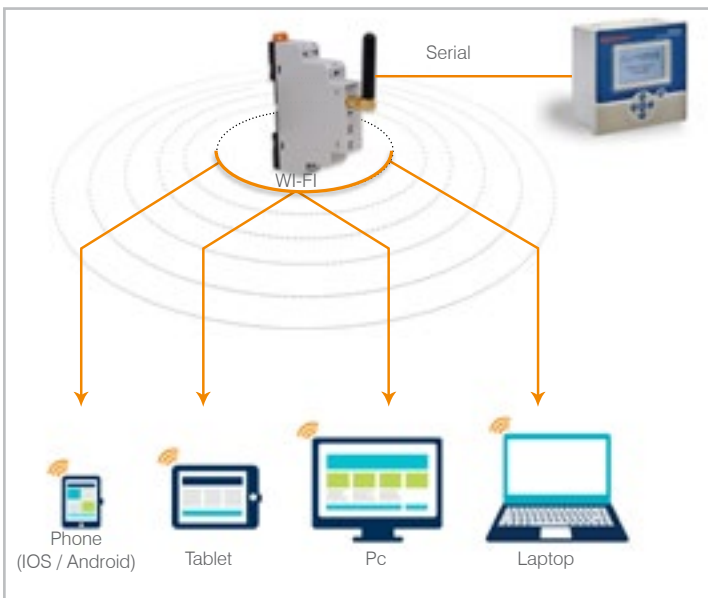

Where there is no established Wi-Fi network, the WTOR may create a Wi-Fi network. A single device can join the Wi-Fi network created by WTOR. Serial devices can be controlled and monitored in this way.

STA Mode:

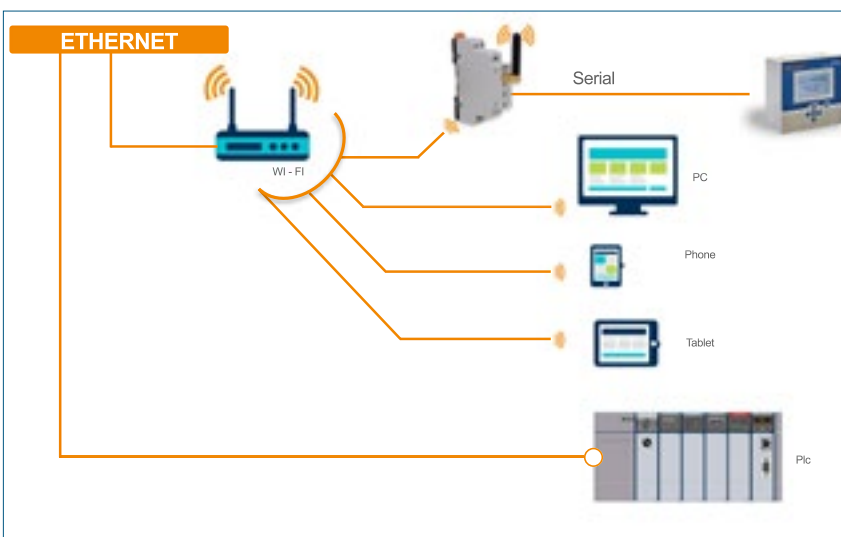




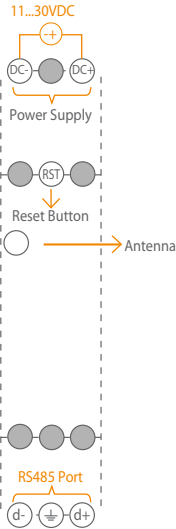
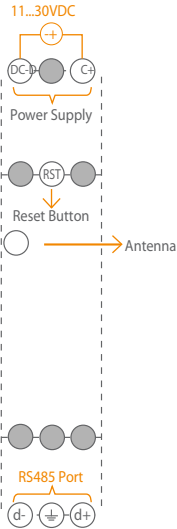
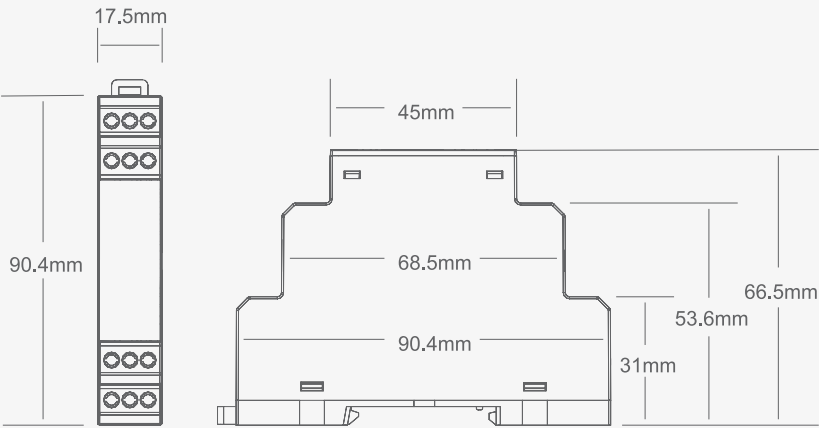
Joins an external Wi-Fi router to connect serial devices to the existing Wi-Fi network. This way the serial devices can be controlled and monitored. The configuration page can be accessed by entering the IP address set for WTOR in the WEB browser of a computer joined to the same network, and the desired configuration settings can be made.

# Selection & Ordering Guide



Type		WTOR		WTOR(with power supply)		
Definition		Wi-Fi Gateway		Wi-Fi Gateway		
Order Number		601 450		601 451		
Casing Width(mm)		17,5mm		17,5mm		
Connections		Screw Terminal		Screw Terminal		
Mounting		Rail Mount		Rail Mount		
General Information	Configuration	Web Interface		Web Interface		
	DHCP	√		√		
	Ping Blocking	√		√		
	LED Indicators	√		√		
	Reset Function	√		√		
	ESD Protection	√		√		
	Supported Drivers	WindowsXP/Vista/7/8/10		WindowsXP/Vista/7/8/10		
WIFI Interface	Standard		802.11b/g/n		802.11b/g/n	
	Operating Modes				AP(Access Point)/ STA (Station) Mode	
	Number of Remote Connections	Server Mode	7		7	
		Client Mode	1		1	
	Security Type		WPA2		WPA2	
Serial Interface	Number of Port		1		1	
	Serial Connection Standard		RS485		RS485	
	Number of Serial Connection Devices	Server Mode	64		64	
		Client Mode	1		1	
	Serial Connection Parameters	Baud Rate	600 - 57600 bps		600 - 57600 bps	
		Data Bit	8		8	
		Stop Bit	1 or 2		1 veya 2	
		Parity	None, Even, Odd		None, Even, Odd	
Supported Protocols		MODBUS TCP; MODBUS RTU via TCP; MODBUS ACII via TCP		MODBUS TCP; MODBUS RTU via TCP; MODBUS ACII via TCP		
Voltage Supply	Voltage	DC	11-30VDC		11-30VDC	
		AC	-		-	
	Frequency	45-65Hz		45-65Hz		
Isolation		1.5kV RMS		1.5kV RMS		
Permissible Ambient Temperature	During Operation	-10°C..+60°C		-10°C..+60°C		
	During Storage	-30°C..+80°C		-30°C..+80°C		
Relative Humidity		Max.95% (no condensation)		Max.95% (no condensation)		
Operating Frequency		45-65Hz		45-65Hz		
Degree of Protection		IP20		IP20		
Power Consumption	DC	1.2W		1.2W		
	AC	-		-		



Tip		WTOR	WTOR (with power supply)
Antenna		Available	Available
High gain antenna		Available	Available
External Power Supply (220/110VAC to 24VDC)		-	Available
Schematics			
			
Dimensional Drawings			

# Selection & Ordering Guide


## UTOR / USB to RS485, RS232 and TTL Converter



### UTOR series products,

- USB to RS485
- USB to RS232
- Provides TTL conversion from USB.
- UTOR is powered from the USB port without the need for an external power supply. Unlike most converters, UTOR has an isolation barrier that provides electrical isolation between your computer and serial devices. This creates an ideal environment where equipment and data are critical.

						
Type		UTOR-4i	UTOR-2i	UTOR-T5i	UTORT3i	
Definition		Isolated RS485 to USB Converter	Isolated RS232 to USB Converter	Isolated TTL(5V) to USB Converter	Isolated TTL(3.3V) to USB Converter	
Order Number		601 430	601 431	601 432	601 433	
Interface	USB	Compatibility	USB 1.1 and USB 2.0	USB 1.1 and USB 2.1	USB 1.1 and USB 2.2	USB 1.1 and USB 2.3
		Connector	USB Type A	USB Type A	USB Type A	USB Type A
	Serial	Port Number	1	1	1	1
		Standard	RS485	RS232	TTL(5V)	TTL(3.3V)
		Connector	Removable terminal block with screw connection	Removable terminal block with screw connection	Removable terminal block with screw connection	Removable terminal block with screw connection
		Isolation	2500Vrms	2500Vrms	2500Vrms	2500Vrms
		Baudrate	300 .. 115200 bps	300 .. 115200 bps	300 .. 115200 bps	300 .. 115200 bps
		Stop Bits	1, 1.5, 2	1, 1.5, 2	1, 1.5, 2	1, 1.5, 2
		Data Bits	5, 6, 7, 8	5, 6, 7, 8	5, 6, 7, 8	5, 6, 7, 8
		Parity	None, Even, Odd	None, Even, Odd	None, Even, Odd	None, Even, Odd
Terminals	D+,D-	Tx, Rx	Tx, Rx	Tx, Rx		
Voltage Supply		via USB port	via USB port	via USB port	via USB port	
Permissible Ambient Temperature	During Operation	-20°C..+60°C	-20°C..+60°C	-20°C..+60°C	-20°C..+60°C	
	During Storage	-20°C..+70°C	-20°C..+70°C	-20°C..+70°C	-20°C..+70°C	
Relative Humidity		Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)	
Degree of Protection		IP20	IP20	IP20	IP20	
Accessories		Available	Available	Available	Available	

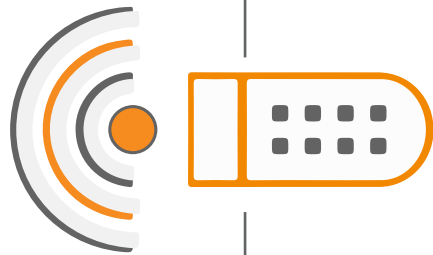

## Remote I/O Solutions

*Remote controlling*

### Defining an Remote I/O in simple terms

---

Remote I/O monitors and controls external signals at a distance from the controller or PC. It could has various input/output combinations.

---

### In which fields are they most commonly used?

---

Modbus RTU  
control relay output  
Stored in  
the memory  
keep the switching counts  
115Kbps

REMOTE I/O series devices can control relay output remotely over MODBUS RTU and read digital input status. REMOTE I/O keep the switching counts of digital inputs in memory. The last set relay output status is stored in the memory as well. It switches the relay output to the last set state after the power interruption, either when the device is energized or when the device is restarted. REMOTE I/O supports fast data transmission up to 115Kbps.

---

### In which fields are they most commonly used?

---

- Electrical power plants and substations
  - PLC-Scada applications
  - Submetering station
  - Building automation
  - Factory automation
  - Water & wastewater treatment plants
  - Machine tool industry
  - IT centres
  - Alarm station
  - Production line management
-



## Benefits and Advantages

- Quick view of status with leds
- Isolated RS485 Port
- Line protection by galvanic isolation
- 10A switching capacity
- Keeps the status of the relay
- Digital Input counter
- Easy configuration
- 1200-115200 bps baudrate adjustment
- Dual supply option: 85-265VAC/DC
- High mechanical endurance
- Sleek 17.5mm wide housing and compact design saves panel space.
- Perfect to fit in modular enclosure
- Self-Extinguishing plastic housing
- High level of Electromagnetic compatibility (EMC) i.e. maximum immunity to interferences.




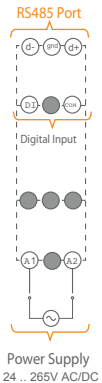
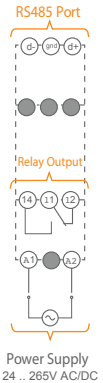

## Layout & Mounting


Klemsan interface relays are suitable for plug-in assembly onto 35 mm standard DIN rails.



**REMOTE I/O**

# Selection & Ordering Guide

					
Type			REMOTE I/O 1001	REMOTE I/O 1100	REMOTE I/O 1101
<b>Definition</b>			Remote I/O Module	Remote I/O Module	Remote I/O Module
<b>Order Number</b>			260 001	260 002	260 003
<b>Casing Width(mm)</b>			17,5	17,5	17,5
<b>Connections</b>			Screw terminal	Screw terminal	Screw terminal
<b>Inputs and Outputs</b>	Relay Outputs	Number of outputs	-	1 pcs.	1 pcs.
		Type	-	NO (SPST)	NO (SPST)
		Max. Switching Current	-	10 A	10 A
		Max. Switching Voltage	-	250 VAC	250 VAC
		Max. Switching Power	-	1250VA	1250VA
	Digital Inputs	Number of inputs	1 pcs.	-	1 pcs.
		Activation type	Active Low, Active High	-	Active Low, Active High
		Min. delay time	10msec	-	10msec
		Input Voltage	24..265V AC/DC	-	24..265V AC/DC
		Frequency	45-65Hz	-	45-65Hz
Isolation Level		5kVRMS	-	5kVRMS	
DI Counter	Available	-	Available		
<b>Supply</b>	Voltage	AC	85..265V	85..265V	85..265V
		DC	85..265V	85..265V	85..265V
<b>Isolation</b>			2,5kVRMS	1,5kVRMS	2,5kVRMS
<b>Power Consumption</b>	AC		< 2,2 VA	< 2,2 VA	< 2,2 VA
	DC		< 1 W	< 1 W	< 1 W
<b>Connections</b>	Power input		A1,A2	A1,A2	A1,A2
	Input Connection		DI, COM+E27:G27E27E27:G31	DI, COM	DI, COM
	Output Connection		11(COM),14(NO),12(NC)	11(COM),14(NO),12(NC)	11(COM),14(NO),12(NC)
<b>Communication</b>	Protocol		Modbus RTU	Modbus RTU	Modbus RTU
	Baud rate		1200 -115200 bps adjustable	1200 -115200 bps adjustable	1200 -115200 bps adjustable
	Stop bit		1	1	1
	Address		1-247	1-247	1-247
	Isolation		2750V RMS	2750V RMS	2750V RMS
<b>Permissible Ambient Temperature</b>	During Operation		-20 to +60 °C	-20 to +60 °C	-20 to +60 °C
	During Storage		-30°C..+80°C	-30°C..+80°C	-30°C..+80°C
Relative Humidity			Max.95% (no condensation)	Max.95% (no condensation)	Max.95% (no condensation)
Degree of Protection			IP20	IP20	IP20
Weight(gr)			44	52	54
Mounting Type			Rail Mounted	Rail Mounted	Rail Mounted
Permissible mounting position			any	any	any
<b>Schematics</b>					

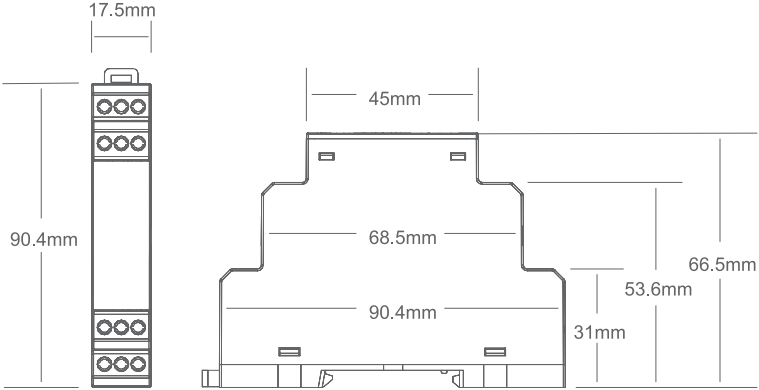Type	REMOTE I/O 1001	REMOTE I/O 1100	REMOTE I/O 1101
<p><b>Dimensional Drawings</b></p>			



# Energy Monitoring Solutions



---

*More efficiency  
than you expected*

---



## Defining an energy analyzer in simple terms

An energy analyzer is an automation device which offers 3-phase energy monitoring, analyzing and controlling the network comprehensively. It enables advanced applications such as energy metering, data logging, DIO applications, transducer applications etc.

## In which fields are they most commonly used?

An energy analyzer provides highly accurate measurement of main electrical parameters and expanded energy metering solutions for your electrical network.

All the data which are being measured or kept in its memory can be transmitted to remote monitoring system thanks to modbus communication.

It offers 3-phase energy and power measurement with data logging such as min/max/avg values, energy values, demand values etc. with date and time.

Digital inputs can be used for equipment status/position monitoring, activation second tariff which is used by generators or as a counter.

Digital outputs can be used to take an impulse which is synchronized with internal energy meters.

Measuring  
Metering  
Alarming  
Communicating  
Harmonic monitoring  
Counting  
Waveform displaying  
Taking impulse  
Data logging  
Converting  
Phasor analyzing  
Specifying  
hour meters

It provides conversion of main electrical parameters into DC voltage or DC mA outputs thanks to analogue outputs which can be easily programmed by the users.

Low/high limit thresholds for all electrical parameters can be defined so load management in a network is possible by means of alarm relay outputs.

In dept-analysis of individual current and voltage harmonics in order to increase network quality.

Displaying signal waveforms for current and voltage phases to detect signal deviations which are observed in real time.

Detailed analysis of phase relationships between current and voltage lines thanks to phasor diagram feature.

Specifying run hours, on hours and power interruptions in order for your machines to be used more effectively.

## In which fields are they most commonly used?


- Medium voltage modular cabinets
- Submetering station
- PLC-Scada applications
- Electrical power plants and substations
- Electric utilities
- Energy meter applications
- Infrastructure
- Alarm station
- IT centres
- High-rise buildings

## Benefits and Advantages

- Current inputs can withstand surges up to 100 A for 1 second
- State of the art technology; modular design, no connector cables, no fixing screws inside
- Panel or rail mount options
- 3 phase and 1 phase options
- Adjustable multi-tariff energy meter
- 4 quadrant measurement
- Harmonic measurement up to 51st
- Programmable analog outputs
- Programmable digital inputs and outputs
- Programmable alarm output
- Modbus communication
- Long distance visibility with super bright seven segment displays
- AC/DC power supply
- Real time clock
- Connection to current transformer x/1 A or x/5 A
- High measurement accuracy according to IEC standards
- High level of Electromagnetic compatibility (EMC) i.e. maximum immunity to interferences
- Self-Extinguishing plastic housing.

## Layout & Mounting

Klemsan measuring devices are suitable for panel mounting for 96x96mm standard or for plug-in assembly onto 35 mm standard DIN rails.

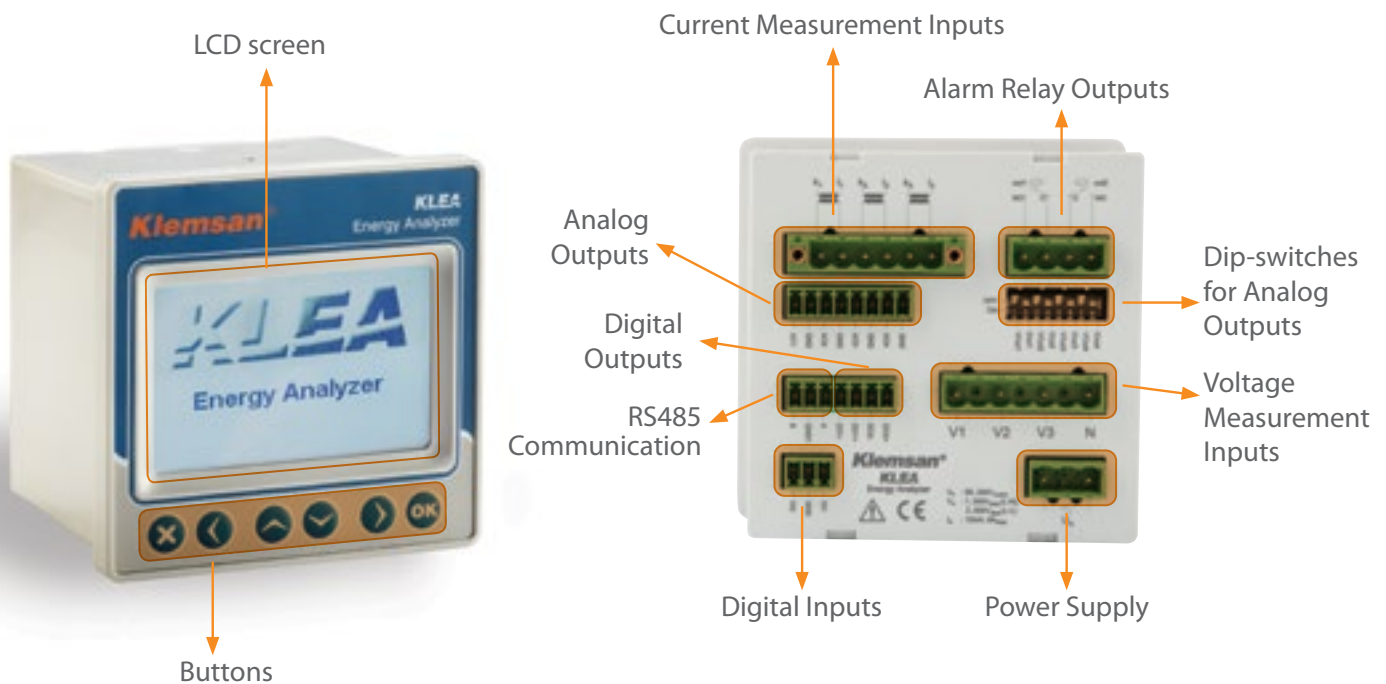

KLEA 324P Energy Analyzer



## Dual Source Energy Measurement



Recording and displaying the consumption of the energy from two different sources; network and generator. Users can set Tariff 2 to measure genset usage as a power supply so exact cost of the energy for network and genset can be identified more easily.



**ENERGY ANALYZER**  
KLEA and POWYS series

## Equipment Maintenance



Monitoring elapsed hours for equipment warranty, recording actual running hours for equipment resale, tracking running time for equipment service thanks to Run hour, On hour and Power interruption counter features.



**ENERGY ANALYZER**  
KLEA 110P  
KLEA 220P  
POWYS 3121 ...

## Buildings and Infrastructure




The main consumers can be identified by measuring the energy consumption of the various sub-assemblies in your buildings. So energy costs that belong to the departments can be managed and distributed between the various users thanks to submetering function. Accurate detection of peak demands in consumption gives you opportunity to reduce your electricity bills.



**ANALYZER / MULTIMETER**  
KLEA, ECRAS and POWYS Series

## Sub-metering Station

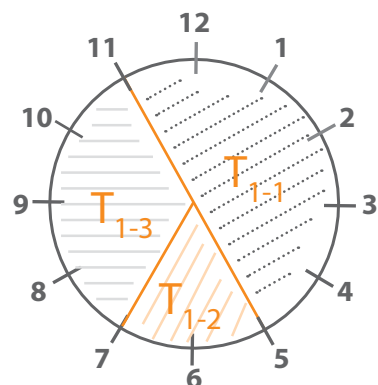

User can use these sub-tariffs in order to measure energy consumption for different shifts in a facility. In addition to Tariff 2, Tariff 1 is splitted into three pieces with adjustable start & end times for each sub-tariff.



**ENERGY ANALYZER**  
KLEA 3xxx Series



## PLC-Scada Applications



Conversion of measured electrical parameters such as voltage, current, active power, reactive power, frequency etc. can be converted to a DC output which is connected to analog input of PLC module by means of power transducer. So it is possible to integrate network measurands with a scada system.



**POWER  
TRANSDUCER**  
DNPT

## Cost Management




Industry faces a never ending challenge to keep down its operating costs. One of the prerequisites for achieving this goal is to identify where costs occur. Energy analyzers present best solution to detect, analyze and prevent them thanks to their advanced multi-tariff meters and real time demand logs.



**ENERGY  
ANALYZER**  
KLEA 3xxx  
Series

## Signal Analyzing

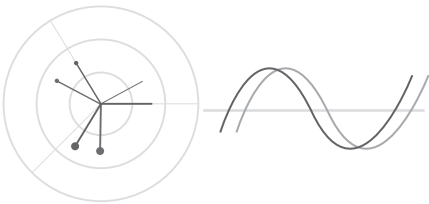

Advanced monitoring of current and voltage waveforms, monitoring signal disturbances, detailed analysis of phase relationships.



**ENERGY  
ANALYZER**  
KLEA 3xxx  
Series

## Remote Monitoring




All measured parameters are transmitted to a PC through RS485 so that keep you informed of system performance 24 hours per day. Parameters can be changed remotely and a variety of measured values can be monitored, analyzed and downloaded via a Web browser with using an energy management softwares and ethernet gateway from anywhere in the world.



**ANALYZER /  
MULTIMETER**  
KLEA, ECRAS  
and POWYS  
Series

## Pulse Concentration Applications

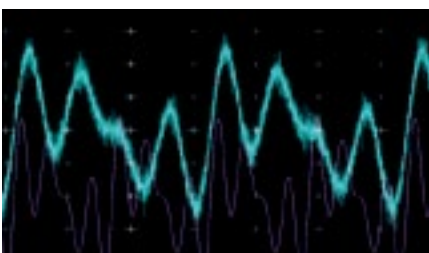

Klemsan energy analyzers offer several meters which are suitable for all type of electrical networks. The pulse output function enables the kWh/kVAh consumption to be exported to a concentrator so that they can be analyzed for energy saving and billing purposes.



**ENERGY  
ANALYZER**  
KLEA and  
POWYS Series



## Din-Rail Applications



Installation costs are significantly decreased by the installation of measurement devices on a standard 35mm din-rail instead of mount them in a panel. This means that panel cut-out is no longer necessary so time and energy can be saved.



**ANALZER/  
POWER  
TRANSDUCER**  
POWYS and  
DNPT Series

## Demand Management



Measuring demand values for active power with date and time helps identifying time periods when energy use is very high so that unnecessary and unexpected costs can be detected and reduced.



**ENERGY  
ANALYZER**  
KLEA 3xxx Series

## Load Management by means of Alarm Outputs



Fully programmable alarm function for any electrical parameter which is measured by the product, gives you opportunity to define pickup setpoint, dropout setpoint and time delay in order to detect a fault condition and prevent it with activating alarm outputs before it's too late.



**ANALYZER /  
MULTIMETER**  
KLEA, ECRAS and  
POWYS Series

## Facility Management



DNPT series transducers provide all requirements of entire facility such as monitoring and conversion of mono/three phase electrical parameters, remote communication, 2 relay output, 2 DIO, 4 analog output, advanced multi-tariff energy meters. Briefly all power management needs are provided by only one product.



**POWER  
TRANSDUCER**  
DNPT

## Counting Quantities



Production quantity can be collected by a limit switch or a dry contact coming from a proximity sensor thanks to digital input feature.



**ENERGY ANALYZER**  
KLEA and POWYS Series

## Harmonic Management



Harmonics cause many problems for all sorts of equipment connected to the low voltage network. Before undertaking the costs and the consequences of poor power quality, harmonics must be measured instantaneously and isolated from the source when it is necessary.



**ENERGY ANALYZER**  
KLEA and POWYS Series

## Fan Control



Assigning temperature value as an alarm parameter allows you to control temperature in a cabinet and prevents equipments from overheating thanks to integrated temperature sensor.



**ENERGY ANALYZER**  
KLEA 3xxx Series

## Data and Event Logging



Minimum, maximum and average values of measurements and consumption data are stored in non-volatile memory as hourly, daily and monthly. Plus, 50 alarm logs with time stamp allows you to analyze the malfunctions which occurred in the past.



**ENERGY ANALYZER**  
KLEA 3xxx Series

## Equipment Status Management



The status of a circuit breaker or a disconnector in an electrical power distribution center can be monitored by means of digital inputs. According to digital input status (open or short circuit), simple Logic-0 or Logic-1 signal is sent to the PC through the modbus communication instantaneously.










**ANALYZER / MULTIMETER**  
KLEA and POWYS Series



Type		KLEA 320P	KLEA 370P	KLEA 322P	KLEA 324P	KLEA 320P-D	
<b>Definiton</b>		3Ø Energy Analyzer	3Ø Energy Analyzer	3Ø Energy Analyzer	3Ø Energy Analyzer	3Ø Energy Analyzer	
<b>Order Number</b>		606100	606101	606102	606103	606130	
<b>General</b>	Seven Segment Display	-	-	-	-	-	
	LCD	Available	Available	Available	Available	Available	
	Language Support	Turkish, English, Russian	Turkish, English, Russian	Turkish, English, Russian	Turkish, English, Russian	Turkish, English, Russian	
	Battery	Available	Available	Available	Available	Available	
	Real Time Clock	Available	Available	Available	Available	Available	
	Password Protection	Available	Available	Available	Available	Available	
	Current Transformer Ratio	1-5000	1-5000	1-5000	1-5000	1-5000	
	Voltage Transformer Ratio	1-5000	1-5000	1-5000	1-5000	1-5000	
	Demand Period	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	
	Connection Type	3P4W, 3P3W, Aron	3P4W, 3P3W, Aron	3P4W, 3P3W, Aron	3P4W, 3P3W, Aron	3P4W, 3P3W, Aron	
	Measurement in Quadrants	4	4	4	4	4	
	Number of Measurement in a period	512	512	512	512	512	
	LCD/Display Refresh Period	1 sec	1 sec	1 sec	1 sec	1 sec	
	Networks	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT	
<b>Energy Measurement</b>	Phasor Diagram	Available	Available	Available	Available	Available	
	Signal Waveforms	Available	Available	Available	Available	Available	
	Min/Max/Demand Values	Available	Available	Available	Available	Available	
	Number of Tariffs	2	2	2	2	2	
	Multi Sub-Tariffs(Peak, Day and Off-Peak)	Available	Available	Available	Available	Available	
	1Ø Phase Energy Meters	Available	Available	Available	Available	Available	
	3Ø Phase Energy Meters	Available	Available	Available	Available	Available	
	4-Quadrant Reactive Energy Meters	-	-	-	-	Available	
	Measurement Range	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	
	Overvoltage Category	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II	
<b>Current Measurement Input</b>	Measurement Surge Voltage	2 kV	2 kV	2 kV	2 kV	2 kV	
	Power Consumption	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	
	intermittent overload	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	
	Sampling Freq.between 45-65 Hz	25,6 kHz	25,6 kHz	25,6 kHz	25,6 kHz	25,6 kHz	
<b>Voltage Measurement Input</b>	Overvoltage Category	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III	
	Measured Range L-N	1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms	
	Measured Range L-L	2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms	
	Measured Frequency Range	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	
	Power Consumption	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA	
<b>Power Quality Measurements</b>	Sampling Freq.between 45-65 Hz	25,6 kHz	25,6 kHz	25,6 kHz	25,6 kHz	25,6 kHz	
	Harmonics for current and voltage phases	Upto 51st	Upto 51st	Upto 51st	Upto 51st	Upto 51st	
	THD-Voltage in %	Available	Available	Available	Available	Available	
	THD-Current in %	Available	Available	Available	Available	Available	
<b>Other Measurements</b>	Run Hour (Operating time for load in hours)	Available	Available	Available	Available	Available	
	On Hour (Operating time for meter in hours)	Available	Available	Available	Available	Available	
	Int Counter (Number of power interruptions)	Available	Available	Available	Available	Available	
<b>Measurement Accuracy</b>	According to IEC 61557-12	Total Active Power	Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2
		Total Reactive Power	Class 1	Class 1	Class 1	Class 1	Class 1
		Total Apparent Power	Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2
		Total Active Energy	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
		Total Reactive Energy	Class 2	Class 2	Class 2	Class 2	Class 2
		Frequency	Class 0.05	Class 0.05	Class 0.05	Class 0.05	Class 0.05
		Current	Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2
		Neutral Current (calculated)	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
		Voltage	Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2
		Power factor	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
	THDV, THDI	Class 1	Class 1	Class 1	Class 1	Class 1	
	According to IEC 62053-22	Total Active Energy	Class 0.25	Class 0.25	Class 0.25	Class 0.25	Class 0.25
	According to IEC 62053-23	Total Reactive Energy	Class 2	Class 2	Class 2	Class 2	Class 2
<b>Inputs and Outputs</b>	Alarm Relay Outputs	Number of outputs	2 pcs.	2 pcs.	2 pcs.	2 pcs.	
		Type	NO (SPST)	NO (SPST)	NO (SPST)	NO (SPST)	
		Max. Switching Current	5 A	5 A	5 A	5 A	
		Max. Switching Voltage	250 V AC	250 V AC	250 V AC	250 V AC	
		Max. Switching Power	1250 VA	1250 VA	1250 VA	1250 VA	





						
KLEA 370P-D	KLEA 220P	KLEA 110P	KLEA-370P-VSM	KLEA-320P-DC	KLEA-220P-DC	KLEA 220P-B
3Ø Energy Analyzer	3Ø Energy Analyzer	3Ø Energy Analyzer		3Ø Energy Analyzer	3Ø Energy Analyzer	
606131	606160	606180	606121	606150	606190	606163
-	-	Available	-	-	-	-
Available	Available	-	Available	Available	Available	Available
Turkish, English, Russian	-	-	Turkish, English, Russian	Turkish, English, Russian	-	-
Available	-	-	Available	Available	-	-
Available	-	-	Available	Available	-	-
Available	Available	Available	Available	Available	Available	Available
1-5000	1-5000	1-5000	1 - 5.000	1 - 5.000	1 - 5.000	1-5000
1-5000	1-5000	1-5000	1 - 5.000	1 - 5.000	1 - 5.000	1-5000
1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable
3P4W, 3P3W, Aron	3P4W, 3P3W	3P4W, 3P3W	3P4W, 3P3W, Aron	3P4W, 3P3W, Aron	3P4W, 3P3W	3P4W, 3P3W
4	4	4	4	4	4	4
512	256	256	512	512	256	256
1 sec	1 sec	1 sec	1 sec	1 sec	1 sec	1 sec
TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT
Available	-	-	Available	Available	-	-
Available	-	-	Available	Available	-	-
Available	Available	Available	Available	Available	Available	Available
2	2	2	2 + 7 different energy meters	2	2	1
Available	-	-	Available	Available	-	-
Available	-	-	Available	Available	-	-
Available	Available	Available	Available	Available	Available	Available
Available	-	-	-	-	-	-
10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC
300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II
2 kV	2 kV	2 kV	2 kV	2 kV	2 kV	2 kV
<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA
100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec
25,6 kHz	12,8 kHz	12,8 kHz	25,6 kHz	25,6 kHz	12,8 kHz	12,8 kHz
300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III
1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms
2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms
45-65 Hz	45-65 Hz	45-65 Hz	45...65 Hz	45...65 Hz	45...65 Hz	45-65 Hz
<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA
25,6 kHz	12,8 kHz	12,8 kHz	25,6 kHz	25,6 kHz	12,8 kHz	12,8 kHz
Upto 51st	Upto 31st	Upto 31st	Upto 51st	Upto 51st	Upto 31st	Upto 31st
Available	Available	Available	Available	Available	Available	Available
Available	Available	Available	Available	Available	Available	Available
Available	Available	Available	Available	Available	Available	Available
Available	Available	Available	Available	Available	Available	Available
Available	Available	Available	Available	Available	Available	Available
Available	Available	Available	Available	Available	Available	Available
Class 0.2	Class 0.5	Class 0.5	Class 0.2	Class 0.2	Class 0.5	Class 0.5
Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
Class 0.2	Class 0.5	Class 0.5	Class 0.2	Class 0.2	Class 0.5	Class 0.5
Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 2	Class 2	Class 2	Class 2	Class 2	Class 2	Class 2
Class 0.05	Class 0.1	Class 0.1	Class 0.05	Class 0.05	Class 0.1	Class 0.1
Class 0.2	Class 0.5	Class 0.5	Class 0.2	Class 0.2	Class 0.5	Class 0.5
Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2
Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
Class 0.25	Class 0.55	Class 0.55	Class 0.25	Class 0.25	Class 0.55	Class 0.55
Class 2	Class 2	Class 2	Class 2	Class 2	Class 2	Class 2
2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	2 pcs.	-
NO (SPST)	NO (SPST)	NO (SPST)	NO (SPST)	NO (SPST)	NO (SPST)	-
5 A	10 A AC / 5 A DC	10 A AC / 5 A DC	5 A	5 A	10 A AC / 5 A DC	-
250 V AC	250 V AC / 30 V DC	250 V AC / 30 V DC	250 V AC	250 V AC	250 V AC / 30 V DC	-
1250 VA	1250 VA / 150 W	1250 VA / 150 W	1250 VA	1250 VA	1250 VA / 150 W	-


Type			KLEA 320P	KLEA 370P	KLEA 322P	KLEA 324P	KLEA 320P-D
Inputs and Outputs	Digital Inputs	Number of inputs	2 pcs.	7 pcs.	2 pcs.	2 pcs.	2 pcs.
		Frequency	100 Hz, 10 ms	100 Hz, 10 ms	100 Hz, 10 ms	100 Hz, 10 ms	100 Hz, 10 ms
		Input Present or Not	Dry Contact	Dry Contact	Dry Contact	Dry Contact	Dry Contact
		Isolation Level	5000 Vrms	5000 Vrms	5000 Vrms	5000 Vrms	5000 Vrms
	Digital Outputs	Number of outputs	2 pcs.	7 pcs.	2 pcs.	2 pcs.	2 pcs.
		Output type	Transistor	Transistor	Transistor	Transistor	Transistor
		Switching Voltage Range	5-30 VDC	5-30 VDC	5-30 VDC	5-30 VDC	5-30 VDC
		Frequency	20 Hz, 50 ms	20 Hz, 50 ms	20 Hz, 50 ms	20 Hz, 50 ms	20 Hz, 50 ms
	Analog Outputs	Isolation Level	5000 Vrms	5000 Vrms	5000 Vrms	5000 Vrms	5000 Vrms
		Range of Outputs 0-5 V, 0-10 V, -5-5 V, -10-10V, 0-20 mA, 4-20 mA	-	-	2	4	-
Supply	Voltage	AC	85-300V	85-300V	85-300V	85-300V	85-300V
		DC	85-300V	85-300V	85-300V	85-300V	85-300V
	Consumption	AC	< 3VA	< 3VA	< 3VA	< 3VA	< 3VA
		DC	<2.5W	<2.5W	<2.5W	<2.5W	<2.5W
	Frequency		45-65Hz	45-65Hz	45-65Hz	45-65Hz	45-65Hz
Data Logging with timestamp	Min/max/avg Values	Hourly records	1920 hours x 68 different parameters	1920 hours x 68 different parameters	1920 hours x 68 different parameters	1920 hours x 68 different parameters	1920 hours x 68 different parameters
		Daily records	240 days x 68 different parameters	240 days x 68 different parameters	240 days x 68 different parameters	240 days x 68 different parameters	240 days x 68 different parameters
		Monthly records	36 months x 68 different parameters	36 months x 68 different parameters	36 months x 68 different parameters	36 months x 68 different parameters	36 months x 68 different parameters
	Demand		4 months x 16 different parameters	4 months x 16 different parameters	4 months x 16 different parameters	4 months x 16 different parameters	4 months x 16 different parameters
	Alarm records		50	50	50	50	50
Communication	Protocol		Modbus RTU	Modbus RTU	Modbus RTU	Modbus RTU	Modbus RTU
	Baud rate		2400-115200 bps adjustable	2400-115200 bps adjustable	2400-115200 bps adjustable	2400-115200 bps adjustable	2400-115200 bps adjustable
	Parity number		None	None	None	None	None
	Stop bit		1	1	1	1	1
	Address		1-247	1-247	1-247	1-247	1-247
	Isolation		2750V RMS	2750V RMS	2750V RMS	2750V RMS	2750V RMS
Mechanical Properties	Weight(g)		404	428	428	428	404
	Protection Class		Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)
	Assembly Type		Panel Mount	Panel Mount	Panel Mount	Panel Mount	Panel Mount
Cable Cross Sections	Supply, Voltage, Current, Relay Outputs	Stranded	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG
		Solid	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG
	Digital I/O, RS 485, Analog Output	Stranded	1,5 mm2-16AWG	1,5 mm2-16AWG	1,5 mm2-16AWG	1,5 mm2-16AWG	1,5 mm2-16AWG
		Solid	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG
Ambient Conditions	Operating Temperature		-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C
	Storage Temperature		-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C
	Relative Humidity (no condensation)		Max.95%	Max.95%	Max.95%	Max.95%	Max.95%
Accessories		Type	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)
		Definition	SILICONE COVER	SILICONE COVER	SILICONE COVER	SILICONE COVER	SILICONE COVER
		Order Number	250 001	250 001	250 001	250 001	250 001
		Packaging unit	2	2	2	2	2







KLEA 370P-D	KLEA 220P	KLEA 110P	KLEA-370P-VSM	KLEA-320P-DC	KLEA-220P-DC	KLEA-220P-B
2 pcs.	2 pcs.	1 pc.	7 pcs.	2 pcs.	2 pcs.	-
100 Hz, 10 ms	100 Hz, 10 ms	100 Hz, 10 ms	100 Hz, 10 ms	100 Hz, 10 ms	100 Hz, 10 ms	-
Dry Contact	Dry Contact	Dry Contact	Dry Contact	Dry Contact	Dry Contact	-
5000 Vrms	5000 Vrms	5000 Vrms	5000 Vrms	5000 Vrms	5000 Vrms	-
2 pcs.	2 pcs.	2 pcs.	7 pcs.	2 pcs.	2 pcs.	-
Transistor	Transistor	Transistor	Transistor	Transistor	Transistor	-
5-30 VDC	5-30 VDC	5-30 VDC	5-30 VDC	5-30 VDC	5-30 VDC	-
20 Hz, 50 ms	20 Hz, 50 ms	20 Hz, 50 ms	5000 Vrms	5000 Vrms	5000 Vrms	-
5000 Vrms	5000 Vrms	5000 Vrms	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
85-300V	85-300V	85-300V	85-300V	-	-	85-300V
85-300V	85-300V	85-300V	85-300V	18-60VDC	18-60VDC	85-300V
< 3VA	<4.5VA	<6VA	< 3VA	-	-	<4.5VA
<2.5W	<2W	<3W	<2.5W	<2.5W	<2.2W	<2W
45-65Hz	45-65Hz	45-65Hz	45-65Hz	-	-	45-65Hz
1920 hours x 68 different parameters	-	-	1920 hours x 68 different parameters	1920 hours x 68 different parameters	-	-
240 days x 68 different parameters	-	-	240 days x 68 different parameters	240 days x 68 different parameters	-	-
36 months x 68 different parameters	-	-	36 months x 68 different parameters	36 months x 68 different parameters	-	-
4 months x 16 different parameters	-	-	4 months x 16 different parameters	4 months x 16 different parameters	-	-
50	-	-	50	50	-	-
Modbus RTU	Modbus RTU	Modbus RTU	Modbus RTU	Modbus RTU	Modbus RTU	Modbus RTU
2400-115200 bps adjustable	1200-57600 bps adjustable	1200-57600 bps adjustable	2400-115200 bps adjustable	2400-115200 bps adjustable	1200-57600 bps adjustable	1200-57600 bps adjustable
None	Odd, Even, None	Odd, Even, None	Odd,Even,None	Odd,Even,None	Odd,Even,None	Odd, Even, None
1	1	1	1	1	1	1
1-247	1-247	1-247	1-247	1-247	1-247	1-247
2750V RMS	2750V RMS	2750V RMS	2750V RMS	2750V RMS	2750V RMS	2750V RMS
428	378	323	428	428	378	378
Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)
Panel Mount	Panel Mount	Panel Mount	Panel Mount	Panel Mount	Panel Mount	Panel Mount
2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2.5mm <sup>2</sup> - 14AWG	2.5mm <sup>2</sup> - 14AWG	2.5mm <sup>2</sup> - 14AWG	2,5 mm2 - 14AWG
4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG
1,5 mm2-16AWG	1,5 mm2-16AWG	1,5 mm2-16AWG	1,5 mm2-16AWG	1,5 mm2-16AWG	1,5 mm2-16AWG	1,5 mm2-16AWG
1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG
-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C
-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30°C +80°C	-30°C +80°C	-30°C +80°C	-30 to +80 °C
Max.95%	Max.95%	Max.95%	Maks. 95%	Maks. 95%	Maks. 95%	Max.95%
IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)
SILICONE COVER	SILICONE COVER	SILICONE COVER	SILICONE COVER	SILICONE COVER	SILICONE COVER	SILICONE COVER
250 001	250 001	250 001	250 001	250 001	250 001	250 001
2	2	2	2	2	2	2

Type	KLEA 320P	KLEA 370P	KLEA 322P	KLEA 324P	KLEA 320P-D
Network Connections	<p>3 wires with 3 CTs</p>	<p>4 wires with 3 CTs</p>	<p>3 wires with 2 CTs</p>	<p>3 wires with 2 CTs</p>	<p>3 wires with 2 CTs</p>
Schematics	<p><b>NOTE :</b> CTs can be connected any phase for 3 wires with 2 CTs connection. They are connected to phase 1 and phase 3 in above figure.</p>				
Digital I/O And Alarm Output Connections	<p>Digital Input</p>	<p>Alarm Relay Output</p>	<p>Digital Output</p>		
Analog Output Connection			<p>AO GND load</p>		
Dimensional Drawings	<p>96.8</p> <p>7.0</p> <p>65.0</p> <p>96.8</p> <p>89.6</p>				



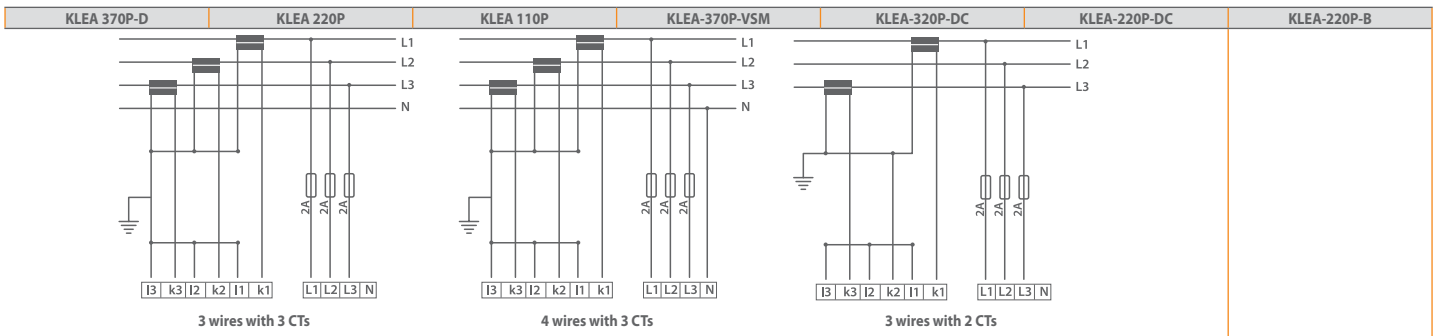

NOTE: CTs can be connected any phase for 3 wires with 2 CTs connection. They are connected to phase 1 and phase 3 in above figure.

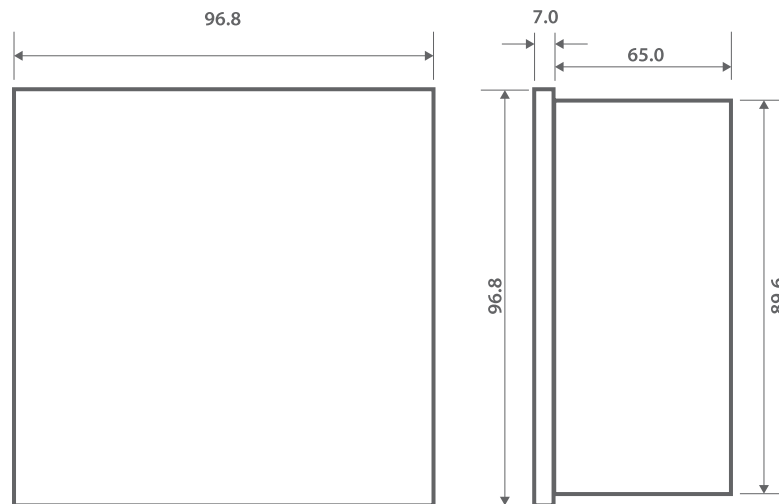




Type	ECRAS 100		ECRAS 120		ECRAS 200		ECRAS 220		ECRAS 100 VCF	
<b>Definiton</b>	3Ø Multimeter		3Ø Multimeter		3Ø Multimeter		3Ø Multimeter		3Ø Multimeter	
<b>Order Number</b>	606210		606211		606212		606213		606218	
<b>General</b>	Seven Segment Display	Available	Available	Available	Available	Available	Available	Available	Available	Available
	LCD	-	-	-	-	-	-	-	-	-
	Language Support	-	-	-	-	-	-	-	-	-
	Battery	-	-	-	-	-	-	-	-	-
	Real Time Clock	-	-	-	-	-	-	-	-	-
	Password Protection	Available	Available	Available	Available	Available	Available	Available	Available	Available
	Current Transformer Ratio	1-5000	1-5000	1-5000	1-5000	1-5000	1-5000	1-5000	1-5000	1-5000
	Voltage Transformer Ratio	1-5000	1-5000	1-5000	1-5000	1-5000	1-5000	1-5000	1-5000	1-5000
	Demand Period	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable
	Connection Type	3P4W, 3P3W	3P4W, 3P3W	3P4W, 3P3W	3P4W, 3P3W	3P4W, 3P3W	3P4W, 3P3W	3P4W, 3P3W	3P4W, 3P3W	3P4W, 3P3W
	Measurement in Quadrants	4	4	4	4	4	4	4	4	4
	Number of Measurement in a period	256	256	256	256	256	256	256	256	256
	LCD/Display Refresh Period	1 sec	1 sec	1 sec	1 sec	1 sec	1 sec	1 sec	1 sec	1 sec
	Networks	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT
Phasor Diagram	-	-	-	-	-	-	-	-	-	
Signal Waveforms	-	-	-	-	-	-	-	-	-	
Min/Max/Demand Values	Available	Available	Available	Available	Available	Available	Available	Available	Available	
<b>Energy Measurement</b>	Number of Tariffs	1	1	1	1	1	1	1	1	1
	Multi Sub-Tariffs(Peak, Day and Off-Peak)	-	-	-	-	-	-	-	-	-
	1Ø Phase Energy Meters	Available	Available	Available	Available	Available	Available	Available	Available	Available
	3Ø Phase Energy Meters	Available	Available	Available	Available	Available	Available	Available	Available	Available
4-Quadrant Reactive Energy Meters	-	-	-	-	-	-	-	-	-	-
<b>Current Measurement Input</b>	Measurement Range	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC
	Overvoltage Category	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II
	Measurement Surge Voltage	2 kV	2 kV	2 kV	2 kV	2 kV	2 kV	2 kV	2 kV	2 kV
	Power Consumption	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA
	intermittent overload	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec
<b>Voltage Measurement Input</b>	Sampling Freq.between 45-65 Hz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz
	Overvoltage Category	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III
	Measured Range L-N	1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms
	Measured Range L-L	2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms
	Measured Frequency Range	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz
<b>Power Quality Measurements</b>	Power Consumption	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA
	Sampling Freq.between 45-65 Hz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz
	Harmonics for current and voltage phases	Upto 31st	Upto 31st	Upto 31st	Upto 31st	Upto 31st	Upto 31st	Upto 31st	Upto 31st	Upto 31st
	THD-Voltage in %	Available	Available	Available	Available	Available	Available	Available	Available	Available
<b>Other Measurements</b>	THD-Current in %	Available	Available	Available	Available	Available	Available	Available	Available	Available
	Run Hour (Operating time for load in hours)	Available	Available	Available	Available	Available	Available	Available	Available	Available
	On Hour (Operating time for meter in hours)	Available	Available	Available	Available	Available	Available	Available	Available	Available
<b>Measurement Accuracy</b>	According to IEC 61557-12	Int Counter (Number of power interruptions)	Available	Available	Available	Available	Available	Available	Available	Available
		Total Active Power	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
		Total Reactive Power	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
		Total Apparent Power	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
		Total Active Energy	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
		Total Reactive Energy	Class 2	Class 2	Class 2	Class 2	Class 2	Class 2	Class 2	Class 2
		Frequency	Class 0.1	Class 0.1	Class 0.1	Class 0.1	Class 0.1	Class 0.1	Class 0.1	Class 0.1
		Current	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
		Neutral Current (calculated)	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
		Voltage	Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2
	Power factor	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	
	THDV, THDI	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	
	According to IEC 62053-22	Total Active Energy	Class 0.5S	Class 0.5S	Class 0.5S	Class 0.5S	Class 0.5S	Class 0.5S	Class 0.5S	Class 0.5S
	According to IEC 62053-23	Total Reactive Energy	Class 2	Class 2	Class 2	Class 2	Class 2	Class 2	Class 2	Class 2
<b>Inputs and Outputs</b>	Alarm Relay Outputs	Number of outputs	-	2 pcs.	-	2 pcs.	-	2 pcs.	-	2 pcs.
		Type	-	NO (SPST)	-	NO (SPST)	-	NO (SPST)	-	NO (SPST)
		Max. Switching Current	-	10 A AC / 5 A DC	-	10 A AC / 5 A DC	-	10 A AC / 5 A DC	-	10 A AC / 5 A DC
		Max. Switching Voltage	-	250 V AC / 30 V DC	-	250 V AC / 30 V DC	-	250 V AC / 30 V DC	-	250 V AC / 30 V DC
		Max. Switching Power	-	1250 VA / 150 W	-	1250 VA / 150 W	-	1250 VA / 150 W	-	1250 VA / 150 W



Type			ECRAS 100	ECRAS 120	ECRAS 200	ECRAS 220	ECRAS 100 VCF
Inputs and Outputs	Digital Inputs	Number of inputs	-	-	-	-	-
		Minimum Counting Frequency	-	-	-	-	-
		Input Present or Not	-	-	-	-	-
		Isolation Level	-	-	-	-	-
	Digital Outputs	Number of outputs	-	-	-	-	-
		Type	-	-	-	-	-
		Switching Voltage Range	-	-	-	-	-
		Minimum Switching Frequency	-	-	-	-	-
	Analog Outputs	Isolation Level	-	-	-	-	-
		Number of outputs	-	-	-	-	-
Range of Outputs 0-5 V, 0-10 V, -5-5 V, -10-10V, 0-20 mA, 4-20 mA		-	-	-	-	-	
Supply	Voltage	AC	85-300V	85-300V	85-300V	85-300V	85-300V
		DC	85-300V	85-300V	85-300V	85-300V	85-300V
	Consumption	AC	<6VA	<6VA	<6VA	<6VA	<6VA
		DC	<3W	<3W	<3W	<3W	<3W
	Frequency		45-65Hz	45-65Hz	45-65Hz	45-65Hz	45-65Hz
Data Logging with timestamp	Min/max/avg Values	Hourly records	-	-	-	-	-
		Daily records	-	-	-	-	-
		Monthly records	-	-	-	-	-
	Demand		-	-	-	-	-
	Alarm records		-	-	-	-	-
Communication	Protocol		-	-	Modbus RTU	Modbus RTU	-
	Baud rate		-	-	1200-57600 bps adjustable	1200-57600 bps adjustable	-
	Parity number		-	-	Odd, Even, None	Odd, Even, None	-
	Stop bit		-	-	1	1	-
	Address		-	-	1-247	1-247	-
	Isolation		-	-	2750V RMS	2750V RMS	-
Mechanical Properties	Weight(g)		272	290	296	316	221
	Protection Class		Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)
	Assembly Type		Panel Mount	Panel Mount	Panel Mount	Panel Mount	Panel Mount
Cable Cross Sections	Supply, Voltage, Current, Relay Outputs	Stranded:	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5mm <sup>2</sup> - 14AWG
		Solid:	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG
	Digital I/O, RS 485, Analog Output	Stranded:	-	-	1,5 mm2-16AWG	1,5 mm2-16AWG	-
		Solid:	-	-	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	-
Ambient Conditions	Operating Temperature		-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C
	Storage Temperature		-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30°C +80°C
	Relative Humidity (no condensation)		Max.95%	Max.95%	Max.95%	Max.95%	Maks. 95%
Accessories		Type	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)
		Definition	SILICONE COVER	SILICONE COVER	SILICONE COVER	SILICONE COVER	SILICONE COVER
		Order Number	250 001	250 001	250 001	250 001	250 001
		Packaging unit	2	2	2	2	2

Type	ECRAS 100	ECRAS 120	ECRAS 200	ECRAS 220	ECRAS 100 VCF
Network Connections		<p>3 wires with 3 CTs</p>		<p>4 wires with 3 CTs</p>	
Schematics		<p>Alarm Relay Output</p>		<p>Alarm Relay Output</p>	
Analog Output Connection					

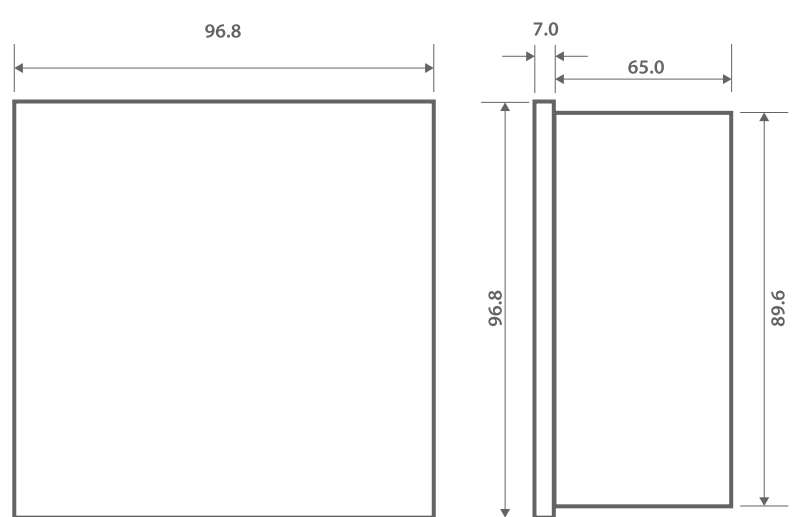Type	ECRAS 100	ECRAS 120	ECRAS 200	ECRAS 220	ECRAS 100 VCF
<p>Dimensional Drawings</p>					

# Selection & Ordering Guide

## Rail Mounted Versions



Type		DNPT	POWYS 3121	POWYS 3111	POWYS 3101
Definiton		3Ø Power Transducer	3Ø Energy Analyzer	3Ø Energy Analyzer	3Ø Energy Analyzer
Order Number		606400	606305	606304	606303
General	Seven Segment Display	-	-	Available	-
	LCD	-	Available	-	-
	Language Support	-	-	-	-
	Battery	Available	-	-	-
	Real Time Clock	Available	-	-	-
	Password Protection	-	Available	Available	Available
	Current Transformer Ratio	1-5000	1-5000	1-5000	1-5000
	Voltage Transformer Ratio	1-5000	1-5000	1-5000	1-5000
	Demand Period	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable
	Measurement in Quadrants	4	4	4	4
	Number of Measurement in a period	512	256	256	256
	LCD/Display Refresh Period	-	1 sec	1 sec	-
	Network	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT
	Wiring	3P4W, 3P3W, Aron	3P4W, 3P3W	3P4W, 3P3W	3P4W, 3P3W
	Phasor Diagram	-	-	-	-
Signal Waveforms	-	-	-	-	
Min/Max/Demand Values	Available	Available	Available	Available	
Number of Tariffs	2	2	2	2	
Energy Measurement	Multi Sub-Tariffs(Peak, Day and Off-Peak)	Available	-	-	-
	1Ø Phase Energy Meters	-	Available	Available	Available
	3Ø Phase Energy Meters	Available	Available	Available	Available
	4 Quadrant Reactive Energy Meters	-	-	-	-
Current Measurement Input	Measurement Range	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC
	Overvoltage Category	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II
	Measurement Surge Voltage	2 kV	2 kV	2 kV	2 kV
	Power Consumption	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA
Voltage Measurement Input	intermittent overload	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec
	Sampling Freq.between 45-65 Hz	25.6 kHz	12.8 kHz	12.8 kHz	12.8 kHz
	Overvoltage Category	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III
	Measured Range L-N	1-300 Vrms	1-300 Vrms	1-300 Vrms	1-300 Vrms
	Measured Range L-L	2-500 Vrms	2-500 Vrms	2-500 Vrms	2-500 Vrms
	Measured Frequency Range	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz
Power Quality Measurements	Power Consumption	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA
	Sampling Freq.between 45-65 Hz	25.6 kHz	12.8 kHz	12.8 kHz	12.8 kHz
	Harmonics for current and voltage phases	Upto 51st	Upto 31st	Upto 31st	Upto 31st
	THD-Voltage in %	Available	Available	Available	Available
Other Measurements	THD-Current in %	Available	Available	Available	Available
	Run Hour (Operating time for load in hours)	-	Available	Available	Available
	On Hour (Operating time for meter in hours)	-	Available	Available	Available
Measurement Accuracy	According to IEC 61557-12	Int Counter (Number of power interruptions)	-	Available	Available
		Total Active Power	Class 0.2	Class 0.5	Class 0.5
		Total Reactive Power	Class 1	Class 1	Class 1
		Total Apparent Power	Class 0.2	Class 0.5	Class 0.5
		Total Active Energy	Class 0.5	Class 0.5	Class 0.5
		Total Reactive Energy	Class 2	Class 2	Class 2
		Frequency	Class 0.05	Class 0.1	Class 0.1
		Current	Class 0.2	Class 0.5	Class 0.5
		Neutral Current	Class 0.5	Class 0.5	Class 0.5
		Voltage	Class 0.2	Class 0.2	Class 0.2
	Power factor	Class 0.5	Class 0.5	Class 0.5	
	THDV, THDI	Class 1	Class 1	Class 1	
	According to IEC 62053-22	Total Active Energy	Class 0.25	Class 0.55	Class 0.55
	According to IEC 62053-23	Total Reactive Energy	Class 2	Class 2	Class 2
	Inputs and Outputs	Alarm Relay Outputs	Number of outputs	2 pcs.	2 pcs.
Type			NO (SPST)	NO (SPST)	NO (SPST)
Max. Switching Current			5 A	10 A AC / 5 A DC	10 A AC / 5 A DC
Max. Switching Voltage			250 V AC	250 V AC / 30 V DC	250 V AC / 30 V DC
Max. Switching Power			1250 VA	1250 VA / 150 W	1250 VA / 150 W
Digital Inputs		Number of inputs	2 pcs.	2 pcs.	2 pcs.
		Minimum Counting Frequency	100 Hz, 10 ms	100 Hz, 10 ms	100 Hz, 10 ms
		Input Present or Not	Dry Contact	Dry Contact	Dry Contact
		Isolation Level	5000 Vrms	5000 Vrms	5000 Vrms
Digital Outputs		Number of outputs	2 pcs.	2 pcs.	2 pcs.
		Type	Transistor	Transistor	Transistor
		Switching Voltage Range	5-30 VDC	5-30 VDC	5-30 VDC
		Minimum Switching Frequency	20 Hz, 50 ms	20 Hz, 50 ms	20 Hz, 50 ms
Analog Outputs		Isolation Level	5000 Vrms	5000 Vrms	5000 Vrms
		Number of outputs	4	-	-
	Range of Outputs	0-5 V, 0-10 V, -5-5 V, -10-10V, 0-20 mA, 4-20 mA	-	-	
Isolation	isolated	-	-		




POWYS 3100	POWYS 1110	POWYS 1120	POWYS 1012	POWYS 1022
3Ø Energy Analyzer	1Ø Energy Analyzer	1Ø Energy Analyzer	1Ø Energy Analyzer	1Ø Energy Analyzer
606300	606351	606352	606354	606355
-	Available	-	Available	-
-	-	Available	-	Available
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
Available	Available	Available	Available	Available
1-5000	1-5000	1-5000	1-5000	1-5000
1-5000	1-5000	1-5000	1-5000	1-5000
1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable	1-60 minutes adjustable
4	4	4	4	4
256	256	256	256	256
-	1 sec	1 sec	1 sec	1 sec
TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT	TT, TN, IT
3P4W, 3P3W	Single-phase with neutral and 1 CT	Single-phase with neutral and 1 CT	Single-phase with neutral and 1 CT	Single-phase with neutral and 1 CT
-	-	-	-	-
-	-	-	-	-
Available	Available	Available	Available	Available
1	1	1	1	1
-	-	-	-	-
Available	Available	Available	Available	Available
Available	-	-	-	-
-	-	-	-	-
10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC
300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II	300 V Cat II
2 kV	2 kV	2 kV	2 kV	2 kV
<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA
100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec
12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz
300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III	300 V Cat III
1-300 Vrms	10-500 Vrms	10-500 Vrms	10-500 Vrms	10-500 Vrms
2-500 Vrms	-	-	-	-
45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz	45-65 Hz
<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA	<0.1 VA
12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz
Upto 31st	Upto 31st	Upto 31st	Upto 31st	Upto 31st
Available	Available	Available	Available	Available
Available	Available	Available	Available	Available
Available	Available	Available	Available	Available
Available	Available	Available	Available	Available
Available	Available	Available	Available	Available
Available	Available	Available	Available	Available
Available	Available	Available	Available	Available
Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 1	Class 1	Class 1	Class 1	Class 1
Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 2	Class 2	Class 2	Class 2	Class 2
Class 0.1	Class 0.1	Class 0.1	Class 0.1	Class 0.1
Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2
Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 1	Class 1	Class 1	Class 1	Class 1
Class 0.5S	Class 0.5S	Class 0.5S	Class 0.5S	Class 0.5S
Class 2	Class 2	Class 2	Class 2	Class 2
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	2 pcs. Transistor	2 pcs. Transistor
-	-	-	5-30 VDC	5-30 VDC
-	-	-	20 Hz, 50 ms	20 Hz, 50 ms
-	-	-	5000 Vrms	5000 Vrms
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

Type			DNPT	POWYS 3121	POWYS 3111	POWYS 3101
Supply	Voltage	AC	85-300V	85-300V	85-300V	85-300V
		DC	85-300V	85-300V	85-300V	85-300V
	Consumption	AC	< 3VA	<4.5VA	<6VA	<6VA
		DC	<2.5W	<2W	<3W	<3W
Data Logging with timestamp	Min/max/avg Values	Hourly records	1920 hours x 68 different parameters	-	-	-
		Daily records	240 days x 68 different parameters	-	-	-
		Monthly records	36 months x 68 different parameters	-	-	-
	Demand	4 months x 16 different parameters	-	-	-	
Alarm records		50	-	-	-	
Communication	Protocol		Modbus RTU	Modbus RTU	Modbus RTU	Modbus RTU
	Baud rate		2400-115200 bps adjustable	1200-57600 bps adjustable	1200-57600 bps adjustable	1200-57600 bps adjustable
	Parity number		None	Odd, Even, None	Odd, Even, None	Odd, Even, None
	Stop bit		1	1	1	1
	Address		1-247	1-247	1-247	1-247
	Isolation		2750V RMS	2750V RMS	2750V RMS	2750V RMS
	Weight(g)		335	340	330	278
Mechanical Properties	Protection Class		IP20	IP20	IP20	IP20
	Assembly Type		Panel Mount	Panel Mount	Panel Mount	Panel Mount
Cable Cross Sections	Supply, Voltage, Current, Relay Outputs	Stranded:	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG
		Solid:	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG
	Digital I/O, RS 485, Analog Output	Stranded:	1,5 mm2-16AWG	1,5 mm2-16AWG	1,5 mm2-16AWG	1,5 mm2-16AWG
		Solid:	1,5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1,5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1,5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1,5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG
Ambient Conditions	Operating Temperature		-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C
	Storage Temperature		-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C
	Relative Humidity (no condensation)		Max.95%	Max.95%	Max.95%	Max.95%
Schematics	3 wires with 3 CTs					
	4 wires with 3 CTs					
	3 wires with 2 CTs	NOTE: CTs can be connected any phase. They are connected to phase 1 and phase 3 in this figure.				
	Single Phase with 1 CT	NOTE: CT and VT can be connected any phase. They are connected to phase-1 in this figure				





POWYS 3100	POWYS 1110	POWYS 1120	POWYS 1012	POWYS 1022
85-300V	85-300V	85-300V	85-300V	85-300V
85-300V	85-300V	85-300V	85-300V	85-300V
<6VA	<4VA	<4VA	<4VA	<4VA
<3W				
45-65Hz	45-65Hz	45-65Hz	45-65Hz	45-65Hz
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
Modbus RTU	Modbus RTU	Modbus RTU	-	-
1200-57600 bps adjustable	1200-57600 bps adjustable	1200-57600 bps adjustable	-	-
Odd, Even, None	Odd, Even, None	Odd, Even, None	-	-
1	1	1	-	-
1-247	1-247	1-247	-	-
2750V RMS	2750V RMS	2750V RMS	-	-
259	135	135	135	135
IP20	IP20	IP20	IP20	IP20
Panel Mount	Panel Mount	Panel Mount	Panel Mount	Panel Mount
2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG
4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG
1,5 mm2-16AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG
1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG
-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C	-20 to +70 °C
-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C
Max.95%	Max.95%	Max.95%	Max.95%	Max.95%

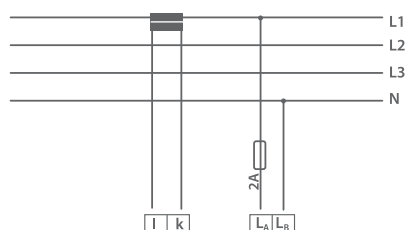

Type	DNPT	POWYS 3121	POWYS 3111	POWYS 3101
Schematics	Digital Output Connection			
	Digital Input Connection			
	Alarm Output Connection			
	Analog Output Connection			
Dimensional Drawings				





---

**Reactive  
Power  
Management  
Solutions**



*Electrical way of saving*

---

## Defining a power factor controller in simple terms

A power factor controller is an automation device which allows power distribution system to operate at its maximum efficiency with reducing reactive power. This control process reduces the load requirement on the energy generation and transmission supply system.

## In which fields are they most commonly used?

Switching capacitors and shunt reactors in order to **compensate** your system.

**Learning** voltage-current connections and correcting them when wrong connecting is detected.

Estimating exact step powers thanks to **dynamic step monitoring** feature.

**Displaying switching cycles** and connection times for capacitors and shunt reactors.

**Activating target-2 cos $\phi$** , which is required by generators to work at their maximum efficiency thanks to generator input.

Provides highly accurate **measurement of** main electrical parameters and energy **metering** solutions for your electrical network.

Measuring Phasor analyzing  
Metering Communicating Alarming  
Harmonic monitoring  
Compensation Data logging  
Dynamic capacitor monitoring Learning  
Displaying Switching Cycles  
Activating target-2 cos $\phi$

All the data which are being measured or kept in its memory, can be transmitted to remote monitoring system thanks to **modbus communication**.

It offers 3-phase energy and power measurement with **data logging** such as min/max/avg values, energy values, demand values etc. with date and time.

Low/high limit thresholds for all parameters can be

defined so load management is possible by means of **alarm** relay outputs.

In dept-analysis of individual current and voltage **harmonics** in order to increase network quality.

Detailed analysis of phase relationships between current and voltage lines thanks to **phasor diagram** feature.

## In which fields are they most commonly used?


- Medium voltage modular cabinets
- Submetering station
- PLC-Scada applications
- Electric power plants and substations
- Electric utilities
- Energy meter applications
- Infrastructure
- Alarm station
- IT centres
- High-rise buildings

## Benefits and Advantages

- Current inputs can withstand surges up to 100 A for 1 second
- State of the art technology; modular design, no connector cables, no fixing screws inside
- Multiple compensation modes
- Capacitors and shunt reactors can be connected to each step
- Mono phase and 3 phase compensation
- Dynamic capacitor monitoring
- Learning connections and step powers
- Display of switching cycle for each step
- Display of connection time for each step
- Multi-language support
- Adjustable phase difference angle
- Energy meters
- Harmonic measurement up to 51st
- Programmable alarm output
- Modbus communication
- Real time clock
- Connection to current transformer x/1 A or x/5 A
- High measurement accuracy according to IEC standards
- Easy configuration with integrated push buttons
- High level of Electromagnetic compatibility (EMC) i.e. maximum immunity to interferences
- Self-Extinguishing plastic housing

## Layout & Mounting

Klemsan power factor devices are suitable for panel mounting for 96x96mm or 144x144mm standards.

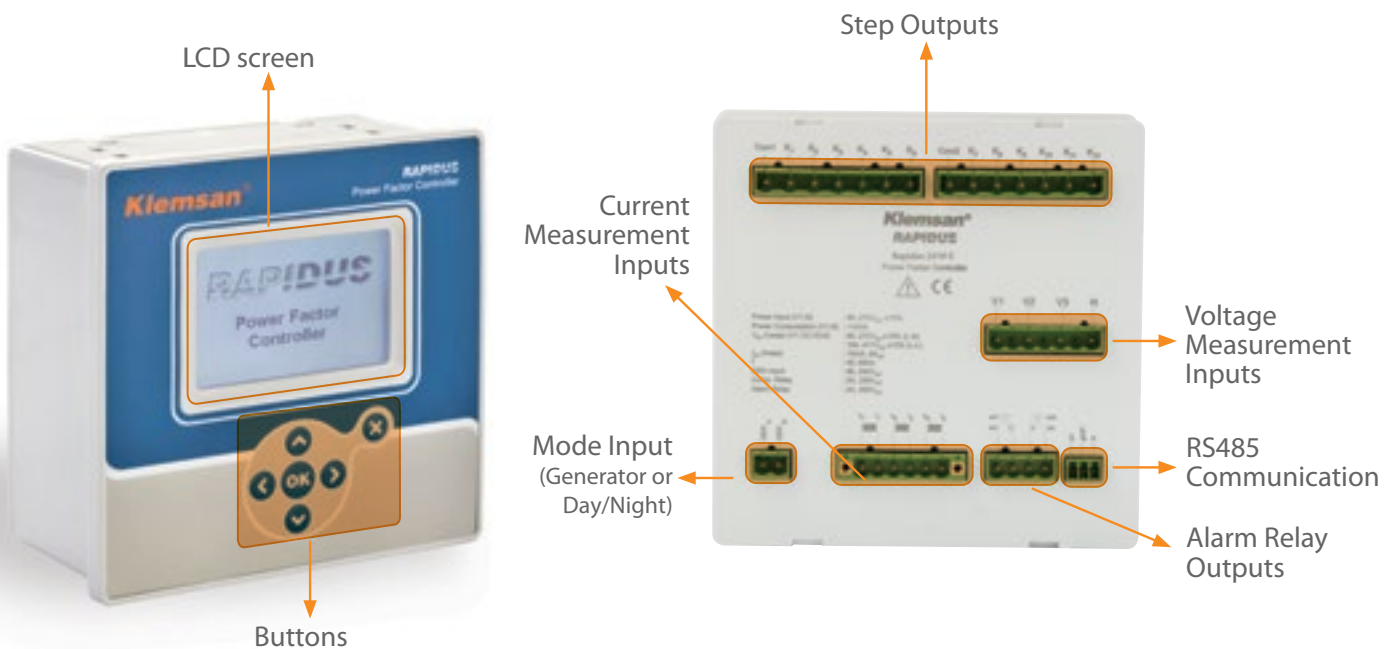

**RAPIDUS 231R-E Power Factor Controller**

## Data Centers, UPS system



Rapidus reactive controller provides two way compensation with controlling capacitors and shunt reactors. Thus, it presents perfect solution for the places where the load is capacitive, such as data centers, mining areas, UPS system, energy transmission lines etc.



**POWER  
FACTOR  
CONTROLLER**  
RAPIDUS Series

## Dynamic Capacitor Monitoring(DCM)



DCM is a supreme function in Rapidus which enables the user to make pro-active maintenance for compensation cabinets. DCM tracks the real time KVAR values of each step and uses the measured KVAR value in compensation calculations.



**POWER  
FACTOR  
CONTROLLER**  
RAPIDUS Series

## Reducing Energy Loses



Limiting energy losses by Joule effect, increasing available active power to use better kW/KVA ratio, reducing level of system noises.



**POWER  
FACTOR  
CONTROLLER**  
RAPIDUS Series

## Reduction of the Electricity Bill



Depending on the different electrical tariffs in different countries, the cost of electricity can be reduced by balancing reactive energy or elimination of reactive penalty payments.



**POWER  
FACTOR  
CONTROLLER**  
RAPIDUS Series



## Energy Metering Applications



In standard compensation cabinets, there is always a multimeter or an analyzer to be associated with a power factor controller. Rapidus, as a two-in-one device meets both requirements of the industry. Users can reduce analyzer, wiring and labor costs by not using an external energy analyzer.



**POWER FACTOR CONTROLLER**  
RAPIDUS Series

## Steel Process Plants



Disconnection of capacitors can be provided by using alarm relay outputs of Rapidus. So undesired voltage levels in compensation panels and subsequent switchgear damages can be prevented before it is too late.



**POWER FACTOR CONTROLLER**  
RAPIDUS Series

## Industrial Plants



Low power factor problems which occur in industrial facilities such as overloaded cables and transformers, reduced voltage level, poor quality motor performance, utility penalty payments etc. can be eliminated with proper analysis by a power factor controller.



**POWER FACTOR CONTROLLER**  
RAPIDUS Series

## Contactor, Capacitor and Shunt Reactor Maintenance



Monitoring switching cycles and operation times for capacitors and shunt reactors helps you to understand how long they are used and how many times they are switched. Plus, DCM feature calculates exact step powers. So it is easy to define maintenance schedules for your compensation panels.



**POWER FACTOR CONTROLLER**  
RAPIDUS Series

## Alarm Control Applications



All necessary parameters such as voltage, current, frequency, temperature, step powers, Q/P ratios, harmonics etc. can be assigned to an alarm relay in order to provide system reliability and durability.



**POWER FACTOR CONTROLLER**  
RAPIDUS Series

# Selection & Ordering Guide




Type	RAPIDUS 231R-E		RAPIDUS 211R		RAPIDUS 232R-E		RAPIDUS 212R			
<b>Definiton</b>	Power Factor Controller (3Ø-12steps)		Power Factor Controller (1Ø-12steps)		Power Factor Controller (3Ø-24steps)		Power Factor Controller (1Ø-24steps)			
<b>Order Number</b>	606005		606011		606007		606014			
<b>General</b>	Measuring system	3Ø	1Ø		3Ø		1Ø			
	LCD Screen	Available	Available		Available		Available			
	Language Support	Turkish, English, Russian	Turkish, English, Russian		Turkish, English, Russian		Turkish, English, Russian			
	Battery	Available	Available		Available		Available			
	Real Time Clock	Available	Available		Available		Available			
	Password Protection	Available	Available		Available		Available			
	Current Transformer Ratio	1-5000	1-5000		1-5000		1-5000			
	Voltage Transformer Ratio	1-5000	1-5000		1-5000		1-5000			
	Demand Period	1-60 minutes adjustable	1-60 minutes adjustable		1-60 minutes adjustable		1-60 minutes adjustable			
	Connection Type	3P4W	Single phase(L-L or L-N) voltage connection with 1 CT		3P4W		Single phase(L-L or L-N) voltage connection with 1 CT			
	Measurement in Quadrants	4	4		4		4			
	Number of Measurement in a period	512	512		512		512			
	LCD/Display Refresh Period	1 sec	1 sec		1 sec		1 sec			
	Networks	TT, TN, IT	TT, TN, IT		TT, TN, IT		TT, TN, IT			
	Phasor Diagram	Available	Available		Available		Available			
	Signal Waveforms	-	-		-		-			
	Min/Max/Demand Values	Available	Available		Available		Available			
<b>Control Operations and Functions</b>	Compensation Modes	Rapidus (Intelligent control mode)	Available		Available		Available			
		Sequential	Available		Available		Available			
		Linear	Available		Available		Available			
		Circular	Available		Available		Available			
	Step Configurations	Manually Assign	Available		Available		Available			
		Predefined	1-1-1-1, 1-1-2-2, 1-2-2-4, 1-2-3-3, 1-2-4-4, 1-1-2-4, 1-2-3-4, 1-2-4-8, 1-1-2-3	1-1-1-1, 1-1-2-2, 1-2-2-4, 1-2-3-3, 1-2-4-4, 1-1-2-4, 1-2-3-4, 1-2-4-8, 1-1-2-3		1-1-1-1, 1-1-2-2, 1-2-2-4, 1-2-3-3, 1-2-4-4, 1-1-2-4, 1-2-3-4, 1-2-4-8, 1-1-2-3		1-1-1-1, 1-1-2-2, 1-2-2-4, 1-2-3-3, 1-2-4-4, 1-1-2-4, 1-2-3-4, 1-2-4-8, 1-1-2-3		
		DCM	Available		Available		-			
		Fixed Step Assignment	Available		Available		Available			
		Power(kVAr)	0.00-1000 adjustable		0.00-1000 adjustable		0.00-1000 adjustable		0.00-1000 adjustable	
	Power factor settings	Target 1 cosØ	0.8cap. to 0.8ind. adjustable		0.8cap. to 0.8ind. adjustable		0.8cap. to 0.8ind. adjustable		0.8cap. to 0.8ind. adjustable	
		Target 2 cosØ	0.8cap. to 0.8ind. adjustable		0.8cap. to 0.8ind. adjustable		0.8cap. to 0.8ind. adjustable		0.8cap. to 0.8ind. adjustable	
	Learning Step Powers and Connections	Available		Available		Available		Available		
	Dual cosØ target	Available		Available		Available		Available		
	4 Quadrant operation for generators	Available		Available		Available		Available		
	Time delays	Step activation time	1-600 sec adjustable		1-600 sec adjustable		1-600 sec adjustable		1-600 sec adjustable	
		Step deactivation time	1-600 sec adjustable		1-600 sec adjustable		1-600 sec adjustable		1-600 sec adjustable	
		Step discharge time	3-1000 sec adjustable		3-1000 sec adjustable		3-1000 sec adjustable		3-1000 sec adjustable	
Phase shift angle	±45 degree adjustable		±45 degree adjustable		±45 degree adjustable		±45 degree adjustable			
Averaging time	Off, 5sec, 10sec, 20sec, 30sec, 40sec, 50sec, 60sec adjustable		Off, 5sec, 10sec, 20sec, 30sec, 40sec, 50sec, 60sec adjustable		Off, 5sec, 10sec, 20sec, 30sec, 40sec, 50sec, 60sec adjustable		Off, 5sec, 10sec, 20sec, 30sec, 40sec, 50sec, 60sec adjustable			
<b>Energy Meters</b>	Number of Tariffs	1		1		1		1		
	Multi Sub-Tariffs(Peak, Day and Off-Peak)	-		-		-		-		
	1Ø Phase Energy Meter	-		-		-		-		
	3Ø Phase Energy Meters	Available		Available		Available		Available		
	4 Quadrant Reactive Energy Meters	-		-		-		-		
<b>Current Measurement Input</b>	Measurement Range	10mA-6A AC		10mA-6A AC		10mA-6A AC		10mA-6A AC		
	Overvoltage Category	300 V Cat II		300 V Cat II		300 V Cat II		300 V Cat II		
	Measurement Surge Voltage	2 kV		2 kV		2 kV		2 kV		
	Power Consumption	<0.2 VA		<0.2 VA		<0.2 VA		<0.2 VA		
	intermittent overload	100A for 1 sec		100A for 1 sec		100A for 1 sec		100A for 1 sec		
Sampling Freq.between 45-65 Hz	25,6 kHz		25,6 kHz		25,6 kHz		25,6 kHz			
<b>Voltage Measurement Input</b>	Overvoltage Category	300 V Cat III		300 V Cat III		300 V Cat III		300 V Cat III		
	Measured Range L-N	95-272 VAC ±10%		95-410VAC ±10%		95-272 VAC ±10%		95-410VAC ±10%		
	Measured Range L-L	164-471 VAC ±10%		95-410VAC ±10%		164-471 VAC ±10%		95-410VAC ±10%		
	Measured Frequency Range	45-65 Hz		45-65 Hz		45-65 Hz		45-65 Hz		
	Power Consumption	<0.1 VA		<0.1 VA		<0.1 VA		<0.1 VA		
Sampling Freq.between 45-65 Hz	25,6 kHz		25,6 kHz		25,6 kHz		25,6 kHz			
<b>Power Quality Measurements</b>	Harmonics / current and voltage	Upto 51st		Upto 51st		Upto 51st		Upto 51st		
	THD-Voltage in %	Available		Available		Available		Available		
	THD-Current in %	Available		Available		Available		Available		













RAPIDUS 218R	RAPIDUS 114	RAPIDUS 114R	RAPIDUS 116	RAPIDUS 116R	RAPIDUS 118
Power Factor Controller (10-8steps)	Power Factor Controller (10-4steps)	Power Factor Controller (10-4steps)	Power Factor Controller (10-6steps)	Power Factor Controller (10-6steps)	Power Factor Controller (10-8steps)
606021	606060	606061	606062	606063	606064
1Ø	1Ø	1Ø	1Ø	1Ø	1Ø
Available	Custom LCD	Custom LCD	Custom LCD	Custom LCD	Custom LCD
Turkish, English, Russian	Turkish, English	Turkish, English	Turkish, English	Turkish, English	Turkish, English
Available	-	-	-	-	-
Available	-	-	-	-	-
Available	Available	Available	Available	Available	Available
1-5000	1 - 5.000	1 - 5.000	1 - 5.000	1 - 5.000	1 - 5.000
1-5000	1 - 999.9	1 - 999.9	1 - 999.9	1 - 999.9	1 - 999.9
1-60 minutes adjustable	-	-	-	-	-
Single phase(L-L or L-N) voltage connection with 1 CT	L-L/L-N	L-L/L-N	L-L/L-N	L-L/L-N	L-L/L-N
4	-	-	-	-	-
512	512	512	512	512	512
1 sec	<0.5 sec.	<0.5 sec.	<0.5 sec.	<0.5 sec.	<0.5 sec.
TT, TN, IT	TT, TN	TT, TN	TT, TN	TT, TN	TT, TN
Available	-	-	-	-	-
Available	-	-	-	-	-
Available	-	-	-	-	-
Available	Available	Available	Available	Available	Available
Available	Available	Available	Available	Available	Available
1-1-1-1, 1-1-2-2, 1-2-2-4, 1-2-3-3, 1-2-4-4, 1-1-2-4, 1-2-3-4, 1-2-4-8, 1-1-2-3	1-1-1-1, 1-2-2-2, 1-2-4-4	1-1-1-1, 1-2-2-2, 1-2-4-4	1-1-1-1, 1-2-2-2, 1-2-4-4	1-1-1-1, 1-2-2-2, 1-2-4-4	1-1-1-1, 1-2-2-2, 1-2-4-4
Available	-	-	-	-	-
Available	-	-	-	-	-
0.00-1000 adjustable	0.00-1000 adjustable	0.00-1000 adjustable	0.00-1000 adjustable	0.00-1000 adjustable	0.00-1000 adjustable
3Ø capacitor, 3Ø shunt reactor adjustable	3Ø capacitor or 1Ø capacitor	3Ø capacitor or 1Ø capacitor	3Ø capacitor or 1Ø capacitor	3Ø capacitor or 1Ø capacitor	3Ø capacitor or 1Ø capacitor
0.8cap. to 0.8ind. adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable
0.8cap. to 0.8ind. adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable
Available	-	-	-	-	-
Available	Available	Available	Available	Available	Available
Available	-	-	-	-	-
1-600 sec adjustable	1-600 sec adjustable	1-600 sec adjustable	1-600 sec adjustable	1-600 sec adjustable	1-600 sec adjustable
1-600 sec adjustable	1-600 sec adjustable	1-600 sec adjustable	1-600 sec adjustable	1-600 sec adjustable	1-600 sec adjustable
3-1000 sec adjustable	3-600 sec adjustable	3-600 sec adjustable	3-600 sec adjustable	3-600 sec adjustable	3-600 sec adjustable
±45 degree adjustable	-	-	-	-	-
Off, 5sec, 10sec, 20sec, 30sec, 40sec, 50sec, 60sec adjustable	-	-	-	-	-
1	1	1	1	1	1
-	-	-	-	-	-
Available	Available	Available	Available	Available	Available
Available	-	-	-	-	-
Available	-	-	-	-	-
10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC
300V Cat II	510V CAT II	510V CAT II	510V CAT II	510V CAT II	510V CAT II
2 kV	2 kV	2 kV	2 kV	2 kV	2 kV
<0.2 VA	<0.3 VA	<0.3 VA	<0.3 VA	<0.3 VA	<0.3 VA
100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec
25,6 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz
300V Cat III	510V CAT III	510V CAT III	510V CAT III	510V CAT III	510V CAT III
95-410VAC ±10%	120-510V AC ±10%	120-510V AC ±10%	120-510V AC ±10%	120-510V AC ±10%	120-510V AC ±10%
95-410VAC ±10%	120-510V AC ±10%	120-510V AC ±10%	120-510V AC ±10%	120-510V AC ±10%	120-510V AC ±10%
45-65 Hz	45...65 Hz	45...65 Hz	45...65 Hz	45...65 Hz	45...65 Hz
<0.1 VA	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA
25,6 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz
Upto 51st	-	-	-	-	-
Available	Available	Available	Available	Available	Available
Available	Available	Available	Available	Available	Available

# Selection & Ordering Guide


Type			RAPIDUS 231R-E	RAPIDUS 211R	RAPIDUS 232R-E	RAPIDUS 212R
Measurement Accuracy	According to IEC 61557-12	Total Active Power	Class 0.2	Class 0.2	Class 0.2	Class 0.2
		Total Reactive Power	Class 1	Class 1	Class 1	Class 1
		Total Apparent Power	Class 0.2	Class 0.2	Class 0.2	Class 0.2
		Total Active Energy	Class 0.5	Class 0.5	Class 0.5	Class 0.5
		Total Reactive Energy	Class 2	Class 2	Class 2	Class 2
		Frequency	Class 0.05	Class 0.05	Class 0.05	Class 0.05
		Current	Class 0.2	Class 0.2	Class 0.2	Class 0.2
		Neutral Current	Class 0.5	Class 0.5	Class 0.5	Class 0.5
		Voltage	Class 0.2	Class 0.2	Class 0.2	Class 0.2
		Power factor	Class 0.5	Class 0.5	Class 0.5	Class 0.5
THDV, THDI	Class 1	Class 1	Class 1	Class 1		
	According to IEC 62053-22	Total Active Energy	Class 0.25	Class 0.25	Class 0.25	Class 0.25
	According to IEC 62053-23	Total Reactive Energy	Class 2	Class 2	Class 2	Class 2
Input and Outputs	Compensation Relay Outputs	Number of outputs	12 pcs.	12 pcs.	24 pcs.	24 pcs.
		Type	NO (SPST)	NO (SPST)	NO (SPST)	NO (SPST)
		Max. Switching Current	2 A	2 A	2 A	2 A
		Max. Switching Voltage	250 VAC	250 VAC	250 VAC	250 VAC
		Max. Switching Power	500 VA	500 VA	500 VA	500 VA
		Mechanical life time	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations
	Electrical life time operations (for NO side)	5×104(5A@250VAC) 1×105(5A@30VDC)	5×104(5A@250VAC) 1×105(5A@30VDC)	5×104(5A@250VAC) 1×105(5A@30VDC)	5×104(5A@250VAC) 1×105(5A@30VDC)	
	Alarm Relay Outputs	Number of outputs	2 pcs.	2 pcs.	2 pcs.	2 pcs.
		Type	NO (SPST)	NO (SPST)	NO (SPST)	NO (SPST)
		Max. Switching Current	4 A	4 A	4 A	4 A
		Max. Switching Voltage	250 VAC	250 VAC	250 VAC	250 VAC
		Max. Switching Power	1000 VA	1000 VA	1000 VA	1000 VA
		Mechanical life time	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations	≥ 10 <sup>7</sup> operations
	Electrical life time operations (for NO side)	5×104(5A@250VAC) 1×105(5A@30VDC)	5×104(5A@250VAC) 1×105(5A@30VDC)	5×104(5A@250VAC) 1×105(5A@30VDC)	5×104(5A@250VAC) 1×105(5A@30VDC)	
	Generator/ Day-Night Input	Number of inputs	1 pc.	1 pc.	1 pc.	1 pc.
		Frequency	45-65Hz	45-65Hz	45-65Hz	45-65Hz
		Input Present or Not	95-240VAC	95-240VAC	95-240VAC	95-240VAC
	Digital Outputs		-	-	-	-
Analog Outputs		-	-	-	-	
Supply	Auxiliary supply input	No	No	No	No	
	Voltage	95-272VAC ±10% from L1-N	95-410VAC ±10% from La-Lb	95-272VAC ±10% from L1-N	95-410VAC ±10% from La-Lb	
	Frequency	45-65Hz	45-65Hz	45-65Hz	45-65Hz	
	Consumption	AC DC	< 10VA -	< 10VA -	< 10VA -	< 10VA -
Data Logging with timestamp	Min/max/avg Values	Hourly records	1920 hours x 68 different parameters	1920 hours x 68 different parameters	1920 hours x 68 different parameters	1920 hours x 68 different parameters
		Daily records	240 days x 68 different parameters	240 days x 68 different parameters	240 days x 68 different parameters	240 days x 68 different parameters
		Monthly records	36 hours x 68 different parameters	36 hours x 68 different parameters	36 hours x 68 different parameters	36 hours x 68 different parameters
	Demand		4 months x 16 different parameters	4 months x 16 different parameters	4 months x 16 different parameters	4 months x 16 different parameters
Alarm records		50	50	50	50	
Communication	Protocol		Modbus RTU	Modbus RTU	Modbus RTU	Modbus RTU
	Baud rate		2400-115200 bps adjustable	2400-115200 bps adjustable	2400-115200 bps adjustable	2400-115200 bps adjustable
	Parity number		None	None	None	None
	Stop bit		1	1	1	1
	Address		1-247 adjustable	1-247 adjustable	1-247	1-247
	Isolation		2000V RMS	2000V RMS	2000V RMS	2000V RMS
Mechanical Properties	Weight(g)		670	663	765	750
	Protection Class		Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)
	Assembly Type		Panel Mount	Panel Mount	Panel Mount	Panel Mount
Cable Cross Sections	Voltage, Current, All Relay Outputs, Gen Input	Stranded:	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG	2,5 mm2 - 14AWG
		Solid:	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm2-12 AWG, 2x1.5 mm2-2x16 AWG
	RS 485	Stranded:	1,5 mm2-16AWG	1,5 mm2-16AWG	1,5 mm2-16AWG	1,5 mm2-16AWG
		Solid:	1,5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1,5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1,5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	1,5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG
Ambient Conditions	Operating Temperature	-20 to +55 °C	-20 to +55 °C	-20 to +55 °C	-20 to +55 °C	-20 to +55 °C
	Storage Temperature	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C	-30 to +80 °C
	Relative Humidity (no condensation)	Max.95%	Max.95%	Max.95%	Max.95%	Max.95%
Accessories		Type	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)
		Definition	SILICONE COVER	SILICONE COVER	SILICONE COVER	SILICONE COVER
		Order Number	250 001	250 001	250 001	250 001
		Packaging unit	2	2	2	2

RAPIDUS 218R	RAPIDUS 114	RAPIDUS 114R	RAPIDUS 116	RAPIDUS 116R	RAPIDUS 118
Class 0.2	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
Class 0.2	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 2	Class 2	Class 2	Class 2	Class 2	Class 2
Class 0.05	Class 0.1	Class 0.1	Class 0.1	Class 0.1	Class 0.1
Class 0.2	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2	Class 0.2
Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5	Class 0.5
Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
Class 0.25	Class 0.5S	Class 0.5S	Class 0.5S	Class 0.5S	Class 0.5S
Class 2	Class 2	Class 2	Class 2	Class 2	Class 2
8+2(If alarm relay outputs are used for compensation) pcs.	4	4	6	6	8
NO (SPST)	NO (SPST)	NO (SPST)	NO (SPST)	NO (SPST)	NO (SPST)
2 A	2A	2A	2A	2A	2A
250 VAC	250VAC	250VAC	250VAC	250VAC	250VAC
500 VA	500 VA	500 VA	500 VA	500 VA	500 VA
≥ 10 <sup>7</sup> operations	≥ 10.0000000 operations	≥ 10.0000000 operations	≥ 10.0000000 operations	≥ 10.0000000 operations	≥ 10.0000000 operations
5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)
2 pcs.	2	2	2	2	2
NO (SPST)	NO (SPST)	NO (SPST)	NO (SPST)	NO (SPST)	NO (SPST)
4 A	4A	4A	4A	4A	4A
250 VAC	250 VAC	250 VAC	250 VAC	250 VAC	250 VAC
1000 VA	1000 VA	1000 VA	1000 VA	1000 VA	1000 VA
≥ 10 <sup>7</sup> operations	≥ 10.0000000 operations	≥ 10.0000000 operations	≥ 10.0000000 operations	≥ 10.0000000 operations	≥ 10.0000000 operations
5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)
1 pc.	1	1	1	1	1
45-65Hz	45-65Hz	45-65Hz	45-65Hz	45-65Hz	45-65Hz
95-240VAC	95-240VAC	95-240VAC	95-240VAC	95-240VAC	95-240VAC
-	-	-	-	-	-
-	-	-	-	-	-
No	-	-	-	-	-
95-410VAC ±10% from La-Lb	120...510V AC ±10% from L1-N	120...510V AC ±10% from L1-N	120...510V AC ±10% from L1-N	120...510V AC ±10% from L1-N	120...510V AC ±10% from L1-N
45-65Hz	45-65Hz	45-65Hz	45-65Hz	45-65Hz	45-65Hz
< 10VA	< 10VA	< 10VA	< 10VA	< 10VA	< 10VA
-	-	-	-	-	-
1920 hours x 68 different paramaters	-	-	-	-	-
240 days x 68 different paramaters	-	-	-	-	-
36 hours x 68 different paramaters	-	-	-	-	-
4 months x 16 different parameters	-	-	-	-	-
50	-	-	-	-	-
Modbus RTU	-	Modbus RTU	-	Modbus RTU	-
2400-115200 bps adjustable	-	1200-38400 bps adjustable	-	1200-38400 bps adjustable	-
None	-	Odd, Even, None	-	Odd, Even, None	-
1	-	1	-	1	-
1-247	-	1-247	-	1-247	-
2000V RMS	-	2000V RMS	-	2000V RMS	-
415	309	314	319	324	329
Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)
Panel Mount	Panel Mount	Panel Mount	Panel Mount	Panel Mount	Panel Mount
2,5 mm2 - 14AWG	2.5mm <sup>2</sup> - 14AWG	2.5mm <sup>2</sup> - 14AWG	2.5mm <sup>2</sup> - 14AWG	2.5mm <sup>2</sup> - 14AWG	2.5mm <sup>2</sup> - 14AWG
4mm2-12 AWG, 2x1.5 mm2-2x16 AWG	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG
1,5 mm2-16AWG	-	1.5mm <sup>2</sup> - 16AWG	-	1.5mm <sup>2</sup> - 16AWG	-
1.5 mm2-16 AWG, 2x0.75 mm2-2x18 AWG	-	1.5mm <sup>2</sup> - 16AWG, 2x0.75mm <sup>2</sup> - 2x18AWG	-	1.5mm <sup>2</sup> - 16AWG, 2x0.75mm <sup>2</sup> - 2x18AWG	-
-20 to +55 °C	-20°C +55°C	-20°C +55°C	-20°C +55°C	-20°C +55°C	-20°C +55°C
-30 to +80 °C	-30°C +80°C	-30°C +80°C	-30°C +80°C	-30°C +80°C	-30°C +80°C
Max.95%	Maks. 95%	Maks. 95%	Maks. 95%	Maks. 95%	Maks. 95%
IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)	IP66 Silicone Cover (96x96mm)
SILICONE COVER	SILICONE COVER	SILICONE COVER	SILICONE COVER	SILICONE COVER	SILICONE COVER
250 001	250 001	250 001	250 001	250 001	250 001
2	2	2	2	2	2

# Selection & Ordering Guide

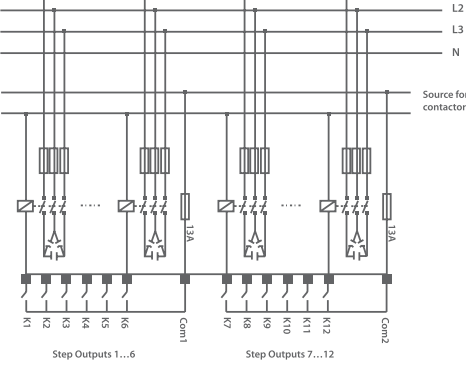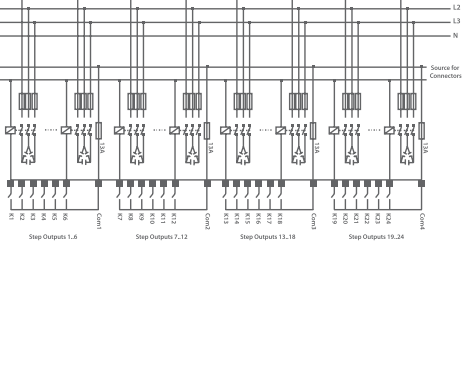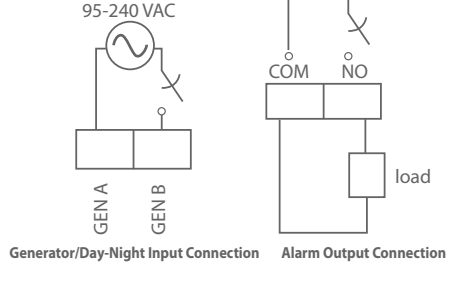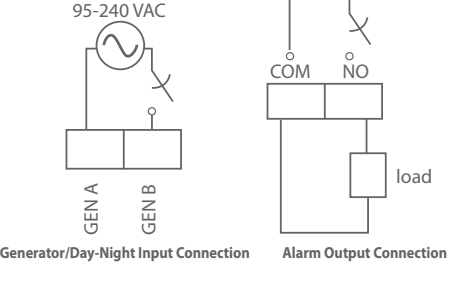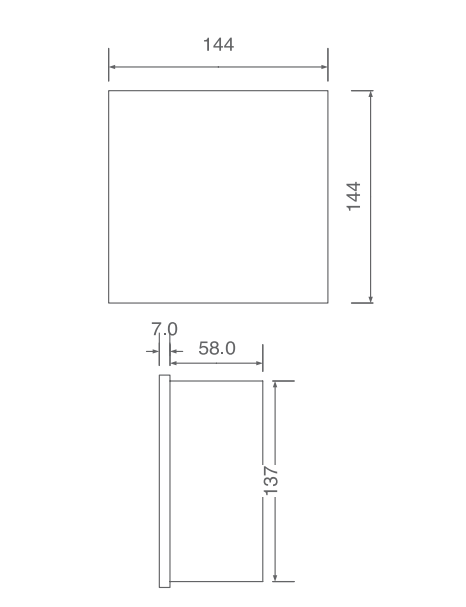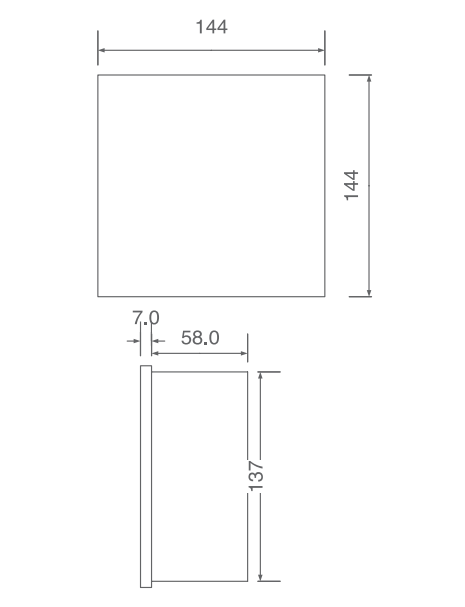Type	RAPIDUS 231R-E	RAPIDUS 211R	RAPIDUS 232R-E	RAPIDUS 212R
Network Connections	 <p>4 wires with 3 CTs</p>	 <p>Single phase system with 1 CT</p> <p><b>NOTE 1:</b> L1, L2 or L3 can be used as current measurement input. L1 is used in this figure.</p> <p><b>NOTE 2:</b> L1-N, L2-N, L3-N, L1-L2, L1-L3 or L2-L3 can be used as voltage measurement input. L3-N is used in this figure.</p>	 <p>4 wires with 3 CTs</p>	 <p>Single phase system with 1 CT</p> <p><b>NOTE 1:</b> L1, L2 or L3 can be used as current measurement input. L1 is used in this figure.</p> <p><b>NOTE 2:</b> L1-N, L2-N, L3-N, L1-L2, L1-L3 or L2-L3 can be used as voltage measurement input. L3-N is used in this figure.</p>
Schematics	 <p>Step Outputs 1...6      Step Outputs 7...12</p> <p><b>NOTE1:</b> 3Ø capacitor, 3Ø shunt reactor, 1Ø capacitor and 1Ø shunt reactor can be used as compensation steps for RAPIDUS 231R-E. 3Ø capacitors are used in above figure.</p> <p><b>NOTE2:</b> 3Ø capacitor and 3Ø shunt reactor can be used as compensation steps for RAPIDUS 211R. 3Ø capacitors are used in above figure.</p>		 <p>Step Outputs 1,6      Step Outputs 7,12      Step Outputs 13,18      Step Outputs 19,24</p> <p><b>NOTE1:</b> 3Ø capacitor, 3Ø shunt reactor, 1Ø capacitor and 1Ø shunt reactor can be used as compensation steps for RAPIDUS 232R-E. 3Ø capacitors are used in above figure.</p> <p><b>NOTE2:</b> 3Ø capacitor and 3Ø shunt reactor can be used as compensation steps for RAPIDUS 212R. 3Ø capacitors are used in above figure.</p>	
Gen Input and Alarm Output Connections	 <p>95-240 VAC</p> <p>GEN A      GEN B</p> <p>Generator/Day-Night Input Connection      Alarm Output Connection</p>		 <p>95-240 VAC</p> <p>GEN A      GEN B</p> <p>Generator/Day-Night Input Connection      Alarm Output Connection</p>	
Dimensional Drawings	 <p>144</p> <p>144</p> <p>7.0      58.0</p> <p>137</p>		 <p>144</p> <p>144</p> <p>7.0      58.0</p> <p>137</p>	


RAPIDUS 218R	RAPIDUS 114	RAPIDUS 114R	RAPIDUS 218R	RAPIDUS 116R	RAPIDUS 118
--------------	-------------	--------------	--------------	--------------	-------------



**Single phase system with 1 CT**


**NOTE 1:** L1, L2 or L3 can be used as current measurement input. L1 is used in this figure.

**NOTE 2:** L1-N, L2-N, L3-N, L1-L2, L1-L3 or L2-L3 can be used as voltage measurement input. L3-N is used in this figure.




**NOTE1:** 3Ø capacitor and 3Ø shunt reactor can be used for compensation. 3Ø capacitors are used in this figure.


**NOTE2:** Alarm outputs can be used for compensation as well. So totally 10 pcs.(8+2) step outputs can be used for compensation




**NOTE1:** 3Ø capacitor and 3Ø shunt reactor can be used for compensation. 3Ø capacitors are used in this figure.




Alarm Output Connection





Generator/Day-Night Input Connection



Alarm Output Connection



Alarm Output Connection



# Selection & Ordering Guide



Type	RAPIDUS 118R		RAPIDUS 110		RAPIDUS 110R	
<b>Definiton</b>	Power Factor Controller (1Ø-8steps)		Power Factor Controller (1Ø-10steps)		Power Factor Controller (1Ø-10steps)	
<b>Order Number</b>	606065		606070		606071	
<b>General</b>	Measuring system	1Ø	1Ø	1Ø	1Ø	1Ø
	LCD Sreen	Custom LCD	Custom LCD	Custom LCD	Custom LCD	Custom LCD
	Language Support	Turkish, English	Turkish, English	Turkish, English	Turkish, English	Turkish, English
	Battery	-	-	-	-	-
	Real Time Clock	-	-	-	-	-
	Password Protection	Available	Available	Available	Available	Available
	Current Transformer Ratio	1 - 5.000	1 - 5.000	1 - 5.000	1 - 5.000	1 - 5.000
	Voltage Transformer Ratio	1 - 999.9	1 - 999.9	1 - 999.9	1 - 999.9	1 - 999.9
	Demand Period	-	-	-	-	-
	Connection Type	L-L/L-N	L-L/L-N	L-L/L-N	L-L/L-N	L-L/L-N
	Measurement in Quadrants	-	-	-	-	-
	Number of Measurement in a period	256	256	256	256	256
	LCD/Display Refresh Period	<0.5 sec.	<0.5 sec.	<0.5 sec.	<0.5 sec.	<0.5 sec.
	Networks	TT, TN	TT, TN	TT, TN	TT, TN	TT, TN
Phasor Diagram	-	-	-	-	-	
Signal Waveforms	-	-	-	-	-	
Min/Max/Demand Values	-	-	-	-	-	
<b>Control Operations and Functions</b>	Compensation Modes	Rapidus (Intelligent control mode)	Available	Available	Available	Available
		Sequential	-	-	-	-
		Linear	-	-	-	-
		Circular	-	-	-	-
	Step Configurations	Manually Assign	Available	Available	Available	Available
		Predefined	1-1-1-1, 1-2-2-2, 1-2-4-4	1-1-1-1, 1-2-2-2, 1-2-4-4	1-1-1-1, 1-2-2-2, 1-2-4-4	1-1-1-1, 1-2-2-2, 1-2-4-4
		DCM	-	-	-	-
		Fixed Step Assigment	-	-	-	-
	Power factor settings	Power(kVAR)	0.00-1000 adjustable	0.00-1000 adjustable	0.00-1000 adjustable	0.00-1000 adjustable
		Type	3Ø capacitor or 1Ø capacitor	3Ø capacitor or 1Ø capacitor	3Ø capacitor or 1Ø capacitor	3Ø capacitor or 1Ø capacitor
	Target 1 cosØ	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable
	Target 2 cosØ	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable
	Learning Step Powers and Connections	-	-	-	-	-
	Dual cosØ target	Available	Available	Available	Available	Available
4 Quadrant operation for generators	-	-	-	-	-	
Time delays	Step activation time	1-600 sec adjustable	1-600 sec adjustable	1-600 sec adjustable	1-600 sec adjustable	
	Step deactivation time	1-600 sec adjustable	1-600 sec adjustable	1-600 sec adjustable	1-600 sec adjustable	
	Step discharge time	3-600 sec adjustable	3-600 sec adjustable	3-600 sec adjustable	3-600 sec adjustable	
Phase shift angle	-	-	-	-	-	
Averaging time	-	-	-	-	-	
<b>Energy Meters</b>	Number of Tariffs	1	1	1	1	
	Multi Sub-Tariffs(Peak, Day and Off-Peak)	-	-	-	-	
	1Ø Phase Energy Meter	Available	Available	Available	Available	
	3Ø Phase Energy Meters	-	-	-	-	
	4 Quadrant Reactive Energy Meters	-	-	-	-	
<b>Current Measurement Input</b>	Measurement Range	10mA-6A AC	10mA-6A AC	10mA-6A AC	10mA-6A AC	
	Overvoltage Category	510V CAT II	510V CAT II	510V CAT II	510V CAT II	
	Measurement Surge Voltage	2 kV	2 kV	2 kV	2 kV	
	Power Consumption	<0.3 VA	<0.3 VA	<0.3 VA	<0.3 VA	
	intermittent overload	100A for 1 sec	100A for 1 sec	100A for 1 sec	100A for 1 sec	
<b>Voltage Measurement Input</b>	Sampling Freq.between 45-65 Hz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	
	Overvoltage Category	510V CAT III	510V CAT III	510V CAT III	510V CAT III	
	Measured Range L-N	120-510V AC ±10%	120-510V AC ±10%	120-510V AC ±10%	120-510V AC ±10%	
	Measured Range L-L	120-510V AC ±10%	120-510V AC ±10%	120-510V AC ±10%	120-510V AC ±10%	
	Measured Frequency Range	45...65 Hz	45...65 Hz	45...65 Hz	45...65 Hz	
<b>Power Quality Measurements</b>	Power Consumption	<0.2 VA	<0.2 VA	<0.2 VA	<0.2 VA	
	Sampling Freq.between 45-65 Hz	12,8 kHz	12,8 kHz	12,8 kHz	12,8 kHz	
	Harmonics / current and voltage	-	-	-	-	
	THD-Voltage in %	Available	Available	Available	Available	
THD-Current in %	Available	Available	Available	Available		












RAPIDUS 111	RAPIDUS 111R
Power Factor Controller (10-12steps)	Power Factor Controller (10-12steps)
606072	606073
1Ø	1Ø
Custom LCD	Custom LCD
Turkish, English	Turkish, English
-	-
-	-
Available	Available
1 - 5.000	1 - 5.000
1 - 999.9	1 - 999.9
-	-
L-L/L-N	L-L/L-N
-	-
512	512
<0.5 sec.	<0.5 sec.
TT, TN	TT, TN
-	-
-	-
-	-
Available	Available
-	-
-	-
-	-
Available	Available
Available	Available
1-1-1-1, 1-2-2-2, 1-2-4-4	1-1-1-1, 1-2-2-2, 1-2-4-4
-	-
-	-
0.00-1000 adjustable	0.00-1000 adjustable
3Ø capacitor or 1Ø capacitor	3Ø capacitor or 1Ø capacitor
0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable
0.8cap. to 0.8ind. Adjustable	0.8cap. to 0.8ind. Adjustable
-	-
Available	Available
-	-
1-600 sec adjustable	1-600 sec adjustable
1-600 sec adjustable	1-600 sec adjustable
3-600 sec adjustable	3-600 sec adjustable
-	-
-	-
1	1
-	-
Available	Available
-	-
-	-
10mA-6A AC	10mA-6A AC
510V CAT II	510V CAT II
2 kV	2 kV
<0.3 VA	<0.3 VA
100A for 1 sec	100A for 1 sec
12,8 kHz	12,8 kHz
510V CAT III	510V CAT III
120-510V AC ±10%	120-510V AC ±10%
120-510V AC ±10%	120-510V AC ±10%
45...65 Hz	45...65 Hz
<0.2 VA	<0.2 VA
12,8 kHz	12,8 kHz
-	-
Available	Available
Available	Available

# Selection & Ordering Guide

Type			RAPIDUS 118R	RAPIDUS 110	RAPIDUS 110R
Measurement Accuracy	According to IEC 61557-12	Total Active Power	Class 0.5	Class 0.5	Class 0.5
		Total Reactive Power	Class 1	Class 1	Class 1
		Total Apparent Power	Class 0.5	Class 0.5	Class 0.5
		Total Active Energy	Class 0.5	Class 0.5	Class 0.5
		Total Reactive Energy	Class 2	Class 2	Class 2
		Frequency	Class 0.1	Class 0.1	Class 0.1
		Current	Class 0.5	Class 0.5	Class 0.5
		Neutral Current	Class 0.5	Class 0.5	Class 0.5
		Voltage	Class 0.2	Class 0.2	Class 0.2
		Power factor	Class 0.5	Class 0.5	Class 0.5
		THDV, THDI	Class 1	Class 1	Class 1
	According to IEC 62053-22	Total Active Energy	Class 0.5S	Class 0.5S	Class 0.5S
	According to IEC 62053-23	Total Reactive Energy	Class 2	Class 2	Class 2
Input and Outputs	Compensation Relay Outputs	Number of outputs	8	10	10
		Type	NO (SPST)	NO (SPST)	NO (SPST)
		Max. Switching Current	2A	2A	2A
		Max. Switching Voltage	250VAC	250VAC	250VAC
		Max. Switching Power	500 VA	500 VA	500 VA
		Mechanical life time	≥ 10.0000000 operations	≥ 10.0000000 operations	≥ 10.0000000 operations
		Electrical life time operations (for NO side)	5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)
	Alarm Relay Outputs	Number of outputs	2	2	2
		Type	NO (SPST)	NO (SPST)	NO (SPST)
		Max. Switching Current	4A	4A	4A
		Max. Switching Voltage	250 VAC	250 VAC	250 VAC
		Max. Switching Power	1000 VA	1000 VA	1000 VA
		Mechanical life time	≥ 10.0000000 operations	≥ 10.0000000 operations	≥ 10.0000000 operations
		Electrical life time operations (for NO side)	5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)
	Generator/ Day-Night Input	Number of inputs	1	1	1
		Frequency	45-65Hz	45-65Hz	45-65Hz
		Input Present or Not	95-240VAC	95-240VAC	95-240VAC
	Digital Outputs	-	-	-	
	Analog Outputs	-	-	-	
	Auxiliary supply input	-	-	-	
Supply	Voltage	120...510V AC ±10% from L1-N	120...510V AC ±10% from L1-N	120...510V AC ±10% from L1-N	
	Frequency	45-65Hz	45-65Hz	45-65Hz	
	Consumption	AC	< 10VA	< 10VA	< 10VA
		DC	-	-	-
Data Logging with timestamp	Min/max/avg Values	Hourly records	-	-	-
		Daily records	-	-	-
		Monthly records	-	-	-
	Demand	-	-	-	
Alarm records	-	-	-		
Communication	Protocol	Modbus RTU	-	Modbus RTU	
	Baud rate	1200-38400 bps adjustable	-	1200-38400 bps adjustable	
	Parity number	Odd, Even, None	-	Odd, Even, None	
	Stop bit	1	-	1	
	Address	1-247	-	1-247	
	Isolation	2000V RMS	-	2000V RMS	
Mechanical Properties	Weight(g)	334	365	369	
	Protection Class	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)	
	Assembly Type	Panel Mount	Panel Mount	Panel Mount	
Cable Cross Sections	Voltage, Current, All Relay Outputs, Gen Input	Stranded:	2.5mm <sup>2</sup> - 14AWG	2.5mm <sup>2</sup> - 14AWG	2.5mm <sup>2</sup> - 14AWG
		Solid:	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG
	RS 485	Stranded:	1.5mm <sup>2</sup> - 16AWG	-	1.5mm <sup>2</sup> - 16AWG
		Solid:	1.5mm <sup>2</sup> - 16AWG, 2x0.75mm <sup>2</sup> - 2x18AWG	-	1.5mm <sup>2</sup> - 16AWG, 2x0.75mm <sup>2</sup> - 2x18AWG
Ambient Conditions	Operating Temperature	-20 to +55 °C	-20°C +55°C	-20°C +55°C	
	Storage Temperature	-30 to +80 °C	-30°C +80°C	-30°C +80°C	
	Relative Humidity (no condensation)	Max.95%	Maks. 95%	Maks. 95%	


RAPIDUS 111	RAPIDUS 111R
Class 0.5	Class 0.5
Class 1	Class 1
Class 0.5	Class 0.5
Class 0.5	Class 0.5
Class 2	Class 2
Class 0.1	Class 0.1
Class 0.5	Class 0.5
Class 0.5	Class 0.5
Class 0.2	Class 0.2
Class 0.5	Class 0.5
Class 1	Class 1
Class 0.55	Class 0.55
Class 2	Class 2
12	12
NO (SPST)	NO (SPST)
2A	2A
250VAC	250VAC
500 VA	500 VA
≥ 10.0000000 operations	≥ 10.0000000 operations
5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)
2	2
NO (SPST)	NO (SPST)
4A	4A
250 VAC	250 VAC
1000 VA	1000 VA
≥ 10.0000000 operations	≥ 10.0000000 operations
5x104(5A@250VAC) 1x105(5A@30VDC)	5x104(5A@250VAC) 1x105(5A@30VDC)
1	1
45-65Hz	45-65Hz
95-240VAC	95-240VAC
-	-
-	-
-	-
120...510V AC ±10% from L1-N	120...510V AC ±10% from L1-N
45-65Hz	45-65Hz
< 10VA	< 10VA
-	-
-	-
-	-
-	-
-	-
-	-
-	Modbus RTU
-	1200-38400 bps adjustable
-	Odd, Even, None
-	1
-	1-247
-	2000V RMS
374	379
Front IP40 / Rear IP20 (IP66 with accessory)	Front IP40 / Rear IP20 (IP66 with accessory)
Panel Mount	Panel Mount
2.5mm <sup>2</sup> - 14AWG	2.5mm <sup>2</sup> - 14AWG
4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG	4mm <sup>2</sup> - 12AWG, 2x1.5mm <sup>2</sup> - 2x16AWG
-	1.5mm <sup>2</sup> - 16AWG
-	1.5mm <sup>2</sup> - 16AWG, 2x0.75mm <sup>2</sup> - 2x18AWG
-20°C +55°C	-20°C +55°C
-30°C +80°C	-30°C +80°C
Maks. 95%	Maks. 95%

# Selection & Ordering Guide

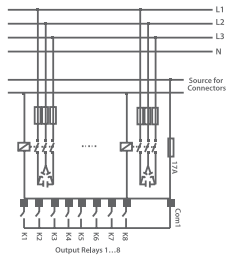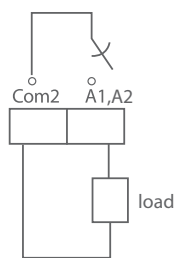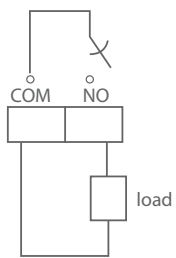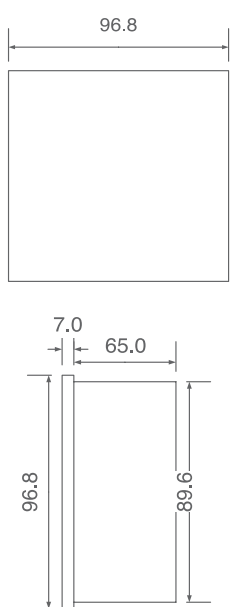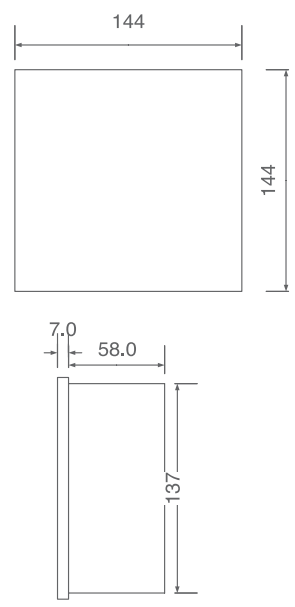Type	RAPIDUS 118R	RAPIDUS 110	RAPIDUS 110R
Network Connections		 <p><b>Single phase system with 1 CT</b></p> <p><b>NOTE 1:</b> L1, L2 or L3 can be used as current measurement input. L1 is used in this figure.</p> <p><b>NOTE 2:</b> L1-N, L2-N, L3-N, L1-L2, L1-L3 or L2-L3 can be used as voltage measurement input. L3-N is used in this figure.</p>	
Schematics	Step Output Connection	 <p><b>NOTE:</b> 3Ø capacitor or 1Ø capacitor can be used for compensation. 3Ø capacitors are used in this figure.</p>	
Gen Input and Alarm Output Connections	 <p><b>Alarm Output Connection</b></p>	 <p><b>Generator/Day-Night Input Connection</b></p>	 <p><b>Alarm Output Connection</b></p>
Dimensional Drawings			

RAPIDUS 111


RAPIDUS 111R




**Single phase system with 1 CT**

**NOTE 1:** L1, L2 or L3 can be used as current measurement input. L1 is used in this figure.


**NOTE 2:** L1-N, L2-N, L3-N, L1-L2, L1-L3 or L2-L3 can be used as voltage measurement input. L3-N is used in this figure.




**NOTE:** 3Ø capacitor or 1Ø capacitor can be used for compensation. 3Ø capacitors are used in this figure.







Generator/Day-Night Input Connection

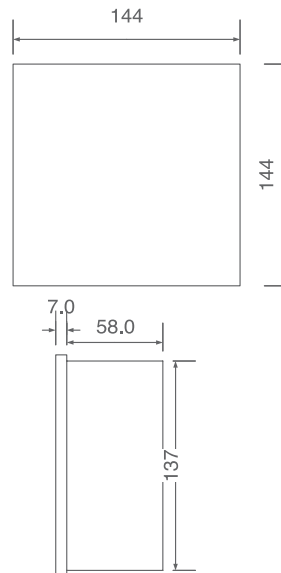

Alarm Output Connection




Product Description	Product Code	LVD				
		EN 61984-1	EN 61984-1	CSA C22.2 NO14-13 UL 508	CSA C22.2 NO14-13 UL 508	EN 50581
KPR-SCE-12VAC/DC-1C interface relay	270800			✓	✓	✓
KPR-SCE-24VAC/DC-1C interface relay	270810			✓	✓	✓
KPR-SCE-48VAC/DC-1C interface relay	270820			✓	✓	✓
KPR-SCE-60VAC/DC-1C interface relay	270830			✓	✓	✓
KPR-SCE-115VAC/DC-1C interface relay	270840			✓	✓	✓
KPR-SCE-230VAC/DC-1C interface relay	270850			✓	✓	✓
KPR-SCE-12VAC/DC-1C relay socket	270801	✓	✓		✓	✓
KPR-SCE-24VAC/DC-1C relay socket	270811	✓	✓		✓	✓
KPR-SCE-48VAC/DC-1C relay socket	270821	✓	✓		✓	✓
KPR-SCE-60VAC/DC-1C relay socket	270831	✓	✓		✓	✓
KPR-SCE-115VAC/DC-1C relay socket	270841	✓	✓		✓	✓
KPR-SCE-230VAC/DC-1C relay socket	270851	✓	✓		✓	✓
KPR-SCE-6VDC-1C interface relay	270794			✓	✓	✓
KPR-SCE-12VDC-1C interface relay	270804			✓	✓	✓
KPR-SCE-24VDC-1C interface relay	270814			✓	✓	✓
KPR-SCE-48VDC-1C interface relay	270824			✓	✓	✓
KPR-SCE-60VDC-1C interface relay	270834			✓	✓	✓
KPR-SCE-115VDC-1C interface relay	270844			✓	✓	✓
KPR-SCE-6VDC-1C relay socket	270795	✓			✓	✓
KPR-SCE-12VDC-1C relay socket	270805	✓			✓	✓
KPR-SCE-24VDC-1C relay socket	270815	✓			✓	✓
KPR-SCE-48VDC-1C relay socket	270825	✓			✓	✓
KPR-SCE-60VDC-1C relay socket	270835	✓			✓	✓
KPR-SCE-115VDC-1C relay socket	270845	✓			✓	✓
KPR-SCF-115VAC/DC-1C interface relay with filter	270846			✓	✓	✓
KPR-SCF-230VAC-1C interface relay with filter	270858			✓	✓	✓
KPR-SCF-115VAC/DC-1C relay socket with filter	270847	✓			✓	✓
KPR-SCF-230VAC-1C relay socket with filter	270859	✓			✓	✓
KPR-SWE-6VDC-1C interface relay	272004			✓	✓	✓
KPR-SWE-12VDC-1C interface relay	272024			✓	✓	✓
KPR-SWE-24VDC-1C interface relay	272044			✓	✓	✓
KPR-SWE-48VDC-1C interface relay	272064			✓	✓	✓
KPR-SWE-60VDC-1C interface relay	272084			✓	✓	✓
KPR-SWE-115VDC-1C interface relay	272104			✓	✓	✓
KPR-SWE-6VDC-1C relay socket	272005	✓			✓	✓
KPR-SWE-12VDC-1C relay socket	272025	✓			✓	✓
KPR-SWE-24VDC-1C relay socket	272045	✓			✓	✓
KPR-SWE-48VDC-1C relay socket	272065	✓			✓	✓
KPR-SWE-60VDC-1C relay socket	272085	✓			✓	✓
KPR-SWE-115VDC-1C relay socket	272105	✓			✓	✓
KPR-SWE-12VAC/DC-1C interface relay	272020	✓		✓	✓	✓
KPR-SWE-24VAC/DC-1C interface relay	272040	✓		✓	✓	✓
KPR-SWE-48VAC/DC-1C interface relay	272060	✓		✓	✓	✓
KPR-SWE-60VAC/DC-1C interface relay	272080	✓		✓	✓	✓
KPR-SWE-115VAC/DC-1C interface relay	272100	✓		✓	✓	✓
KPR-SWE-230VAC/DC-1C interface relay	272120	✓		✓	✓	✓



Product Description	Product Code	LVD		EMC <sup>2</sup>										UL LISTED		UL US		RoHS		
		EN 60664-1	EN 61984-1	EN 61000-4-2	EN 61000-4-3	EN 61000-4-4	EN 61000-4-5	EN 61000-4-6	EN 61000-4-8	EN 61000-4-11	EN 61000-6-1	EN 61000-6-3	EN 55011	CSA C22.2 NO14-13	UL 508	CSA C22.2 NO14-13	UL 508	EN 50581		
KPR-SWE-12VAC/DC-1C relay socket	272021		✓														✓	✓	✓	
KPR-SWE-24VAC/DC-1C relay socket	272041		✓															✓	✓	✓
KPR-SWE-48VAC/DC-1C relay socket	272061		✓															✓	✓	✓
KPR-SWE-60VAC/DC-1C relay socket	272081		✓															✓	✓	✓
KPR-SWE-115VAC/DC-1C relay socket	272101		✓															✓	✓	✓
KPR-SWE-230VAC/DC-1C relay socket	272121		✓															✓	✓	✓
KPR-SWE-230VAC-1C interface relay	272122		✓											✓	✓		✓	✓	✓	
KPR-SWE-230VAC-1C relay socket	272123		✓														✓	✓	✓	
KPR-SWF-115VAC/DC-1C interface relay with filter	272106		✓											✓	✓		✓	✓	✓	
KPR-SWF-230VAC/DC-1C interface relay with filter	272126		✓											✓	✓		✓	✓	✓	
KPR-SWF-230VAC-1C interface relay with filter	272128		✓											✓	✓		✓	✓	✓	
KPR-SWF-115VAC/DC-1C relay socket with filter	272107		✓														✓	✓	✓	
KPR-SWF-230VAC/DC-1C relay socket with filter	272127		✓														✓	✓	✓	
KPR-SWF-230VAC-1C relay socket with filter	272129		✓														✓	✓	✓	
KPR-SWE-6VDC-2C (Relay)	272 505													✓	✓				✓	
KPR-SWE-12VAC/DC-2C (Relay)	272 521		✓											✓	✓		✓	✓	✓	
KPR-SWE-12VDC-2C (Relay)	272 525													✓	✓				✓	
KPR-SWE-24VAC/DC-2C (Relay)	272 541		✓											✓	✓		✓	✓	✓	
KPR-SWE-24VDC-2C (Relay)	272 545													✓	✓				✓	
KPR-SWE-48VAC/DC-2C (Relay)	272 561		✓														✓	✓	✓	
KPR-SWE-48VDC-2C (Relay)	272 565													✓	✓				✓	
KPR-SWE-60VAC/DC-2C (Relay)	272 581		✓											✓	✓		✓	✓	✓	
KPR-SWE-60VDC-2C (Relay)	272 585													✓	✓				✓	
KPR-SWE-115VAC/DC-2C (Relay)	272 601		✓											✓	✓		✓	✓	✓	
KPR-SWE-115VDC-2C (Relay)	272 605													✓	✓				✓	
KPR-SWF-115VAC/DC-2C (Relay)	272 607		✓											✓	✓		✓	✓	✓	
KPR-SWE-230VAC/DC-2C (Relay)	272 621		✓											✓	✓		✓	✓	✓	
KPR-SWE-230VAC-2C (Relay)	272 623		✓											✓	✓		✓	✓	✓	
KPR-SWF-230VAC/DC-2C (Relay)	272 627		✓														✓	✓	✓	
KPR-SWF-230VAC-2C (Relay)	272 629		✓														✓	✓	✓	
KPR-SWE-6VDC-2C relay socket	272 504		✓														✓	✓	✓	
KPR-SWE-12VAC/DC-2C relay socket	272 520		✓											✓	✓		✓	✓	✓	
KPR-SWE-12VDC-2C relay socket	272 524		✓														✓	✓	✓	
KPR-SWE-24VAC/DC-2C relay socket	272 540		✓											✓	✓		✓	✓	✓	
KPR-SWE-24VDC-2C relay socket	272 544													✓	✓				✓	
KPR-SWE-48VAC/DC-2C relay socket	272 560		✓											✓	✓		✓	✓	✓	
KPR-SWE-48VDC-2C relay socket	272 564		✓														✓	✓	✓	
KPR-SWE-60VAC/DC-2C relay socket	272 580		✓											✓	✓		✓	✓	✓	
KPR-SWE-60VDC-2C relay socket	272 584		✓											✓	✓		✓	✓	✓	
KPR-SWE-115VAC/DC-2C relay socket	272 600		✓														✓	✓	✓	
KPR-SWE-115VDC-2C relay socket	272 604		✓														✓	✓	✓	
KPR-SWF-115VAC/DC-2C relay socket	272 606		✓														✓	✓	✓	
KPR-SWE-230VAC/DC-2C relay socket	272 620		✓														✓	✓	✓	
KPR-SWE-230VAC-2C relay socket	272 622		✓														✓	✓	✓	
KPR-SWF-230VAC/DC-2C relay socket	272 626		✓														✓	✓	✓	
KPR-SWF-230VAC-2C relay socket	272 628		✓														✓	✓	✓	

Product Description	Product Code	LVD		EMC <sup>2</sup>										cUL <sup>®</sup> US LISTED		cR <sup>®</sup> US		RoHS
		EN 60664-1	EN 61984-1	EN 61000-4-2	EN 61000-4-3	EN 61000-4-4	EN 61000-4-5	EN 61000-4-6	EN 61000-4-8	EN 61000-4-11	EN 61000-6-1	EN 61000-6-3	EN 55011	CSA C22.2 NO14-13	UL 508	CSA C22.2 NO14-13	UL 508	EN 50581
C1-SA Protection relay	270156			✓	✓	✓		✓	✓		✓	✓	✓					✓
C1-SAP Protection relay	270157			✓	✓	✓		✓	✓		✓	✓	✓					✓
C1-SVP Protection relay	270158			✓	✓	✓		✓	✓		✓	✓	✓					✓
C1D-SA Protection relay	270256			✓	✓	✓		✓	✓		✓	✓	✓					✓
C1D-SAP Protection relay	270257			✓	✓	✓		✓	✓		✓	✓	✓					✓
C1D-SVP Protection relay	270258			✓	✓	✓		✓	✓		✓	✓	✓					✓
V1 Protection relay	270159			✓	✓	✓		✓	✓		✓	✓	✓					✓
V1-S Protection relay	270160			✓	✓	✓		✓	✓		✓	✓	✓					✓
V1-T Protection relay	270162			✓	✓	✓		✓	✓		✓	✓	✓					✓
V1-D Protection relay	270259			✓	✓	✓		✓	✓		✓	✓	✓					✓
V1-DS Protection relay	270260			✓	✓	✓		✓	✓		✓	✓	✓					✓
F1 Protection relay	270161			✓	✓	✓		✓	✓		✓	✓	✓					✓
P1-A Protection relay	270150			✓	✓	✓		✓	✓		✓	✓	✓					✓
P1-p Protection relay	270151			✓	✓	✓		✓	✓		✓	✓	✓					✓
P1-S Protection relay	270152			✓	✓	✓		✓	✓		✓	✓	✓					✓
P1-SP Protection relay	270153			✓	✓	✓		✓	✓		✓	✓	✓					✓
P1-SA Protection relay	270154			✓	✓	✓		✓	✓		✓	✓	✓					✓
P1-SAP Protection relay	270155			✓	✓	✓		✓	✓		✓	✓	✓					✓
P1D-SA Protection relay	270254			✓	✓	✓		✓	✓		✓	✓	✓					✓
P1D-SAP Protection relay	270255			✓	✓	✓		✓	✓		✓	✓	✓					✓
P1-SU Protection relay (115 V AC - FORM A)	270402			✓	✓	✓		✓	✓		✓	✓	✓					✓
P1-SU Protection relay (115 V AC - FORM C)	270403			✓	✓	✓		✓	✓		✓	✓	✓					✓
P1-SU Protection relay (230 V AC - FORM A)	270400			✓	✓	✓		✓	✓		✓	✓	✓					✓
P1-SU Protection relay (230 V AC - FORM C)	270401			✓	✓	✓		✓	✓		✓	✓	✓					✓
CPR 16 Protection relay	270270	✓		✓	✓	✓	✓	✓		✓	✓							✓
T1-K Time relay	270354			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓
T1-LR Time relay (left-right)	270356			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓
T1-XS Time relay	270357			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓



Product Description	Product Code	LVD							EMC <sup>2</sup>									UL US LISTED		RoHS	
		EN 61010-1	EN 61010-2-30	EN 61557-12	EN 61010-1	EN 61326-1	EN 61000-3-2	EN 61000-3-3	EN 61000-4-2	EN 61000-4-3	EN 61000-4-4	EN 61000-4-5	EN 61000-4-6	EN 61000-4-8	EN 61000-4-11	EN 61000-6-1	EN 61000-6-3	EN 5501 1	CSA C22.2 NO14-13	UL 508	EN 50581
PH1-20L Time relay (photocell)	270050							✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SD1 Time relay (star delta)	270358							✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
T1-60S Time relay	270350							✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
T1-FLASH Time relay	270351							✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
T1-M5 Time relay	270353							✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
T1-M4 Time relay	270355							✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
T1-100S Time relay	270359							✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
ECRAS 100 Energy analyser	606210	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
ECRAS 120 Energy analyser	606211	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
ECRAS 200 Energy analyser	606212	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
ECRAS 220 Energy analyser	606213	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
ECRAS ALARM Energy analyser	606201	✓	✓	✓	✓	✓		✓		✓	✓	✓	✓	✓	✓			✓			✓
ECRAS -VCF	606218	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
KLEA 110 P Energy analyser	606180	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
KLEA 220 P Energy analyser	606160	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓		✓		✓			✓
KLEA220P-B Energy analyser	606163	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓		✓		✓			✓
KLEA 320 P Energy analyser	606100	✓	✓	✓	✓	✓										✓		✓			✓
KLEA 322 P Energy analyser	606102	✓	✓	✓	✓	✓										✓		✓			✓
KLEA 324 P Energy analyser	606103	✓	✓	✓	✓	✓										✓		✓			✓
KLEA 370 P Energy analyser	606101	✓	✓	✓	✓	✓										✓		✓			✓
KLEA 370P-VSM	606121	✓	✓	✓	✓	✓										✓		✓			✓
G1D-SA	270140	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
G1D-SA-L	270141	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
G1D-SV	270145	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
M1D-S	270142	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
M1D-SA	270144	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
G1-SAP	270131	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
G1-SA	270130	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
G1-A	270136	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
G1-SAT	270137	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
G1-TU	270138	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
G1-SV	270139	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
G1-SVP	270180	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
G1-VM	270146	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
G1-TUM	270147	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
M1-A	270134	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
M1-SA	270132	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
M1-SP	270135	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
M1-SAP	270133	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
Z1-M4	270374	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
Z1-XS	270377	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
Z1-LR	270376	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
Z1-K	270374	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
Z1-60S	270370	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓
Z1-FLASH	270371	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓			✓

Product Description	Product Code	LVD			EMC <sup>2</sup>													EN 50581	
		EN 61010-1	EN 61010-2-30	EN 61557-12	EN 61326-1	EN 61000-3-2	EN 61000-3-3	EN 61000-4-2	EN 61000-4-3	EN 61000-4-4	EN 61000-4-5	EN 61000-4-6	EN 61000-4-8	EN 61000-4-11	EN 55011	CISPR 11/R/E	CISPR 11/C/E		
Z1-M5	270373	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
ZD-1	270378	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Z1-100S	270379	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
POWYS 1022	606355	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
POWYS 1012	606354	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
POWYS 1023	606356	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
POWYS 1110	606351	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
POWYS 1120	606352	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
POWYS 3121	606305	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
POWYS 3122 (TÜRKÇE)	606308			✓															
POWYS 3122 (ENGLISH)	606307			✓															
POWYS 3111	606304	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
POWYS 3101	606303	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
POWYS 3100	606300	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
PISO-DC-DUO (0...20 - 0...20)	602700				✓		✓	✓					✓		✓	✓			
PISO-DC-1 (0...20 - 0...20)	602800				✓		✓	✓					✓		✓	✓			
PISO-DC-1 (4...20 - 4...20)	602801				✓		✓	✓					✓		✓	✓			
PISO-DC-1 (0...20 - 0...10)	602802				✓		✓	✓					✓		✓	✓			
PISO-DC-1 (0...20 - 0...5)	602803				✓		✓	✓					✓		✓	✓			
PISO-DC-2 (0...20 - 0...20)	602850				✓		✓	✓					✓		✓	✓			
PISO-DC-2 (4...20 - 4...20)	602851				✓		✓	✓					✓		✓	✓			
PISO-DC-2 (0...20 - 0...10)	602852				✓		✓	✓					✓		✓	✓			
PISO-DC-2 (0...20 - 0...5)	602853				✓		✓	✓					✓		✓	✓			
PISO-DC-DUO (4...20 - 4...20)	602701				✓		✓	✓					✓		✓	✓			
PISO-DC-DUO (0...20 - 0...10)	602702				✓		✓	✓					✓		✓	✓			
PISO-DC-DUO (0...20 - 0...5)	602703				✓		✓	✓					✓		✓	✓			
ASCON 311	602300	✓			✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓		
ASCON 321	602310	✓			✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓		
ASCON 331	602320	✓			✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓		
ASCON 341	602330	✓			✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓		
ASCON 352	602400	✓			✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓		
RAPIDUS 111 R Reactive Power Factor Controller	606073	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
RAPIDUS 111 Reactive Power Factor Controller	606072	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
RAPIDUS 110 R Reactive Power Factor Controller	606071	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
RAPIDUS 110 Reactive Power Factor Controller	606070	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
RAPIDUS 118 R Reactive Power Factor Controller	606065	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
RAPIDUS 118 Reactive Power Factor Controller	606064	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
RAPIDUS 116 R Reactive Power Factor Controller	606063	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
RAPIDUS 116 Reactive Power Factor Controller	606062	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
RAPIDUS 114 R Reactive Power Factor Controller	606061	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
RAPIDUS 114 Reactive Power Factor Controller	606060	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
RAPIDUS 211 R Reactive Power Factor Controller	606011	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	

Product Description	Product Code	LVD					EMC <sup>2</sup>																
		EN 61010-1	EN 61010-2-30	EN 60688	EN 61557-12		EN 61010-1	EN 61326-1	EN 61000-3-2	EN 61000-3-3	EN 61000-4-2	EN 61000-4-3	EN 61000-4-4	EN 61000-4-5	EN 61000-4-6	EN 61000-4-8	EN 61000-4-11	EN 61000-6-2	EN 61000-6-4	EN 55011	CISPR 11/R/E	CISPR 11/C/E	
RAPIDUS 211 T Reactive Power Factor Controller	606012	✓			✓		✓			✓	✓	✓	✓	✓	✓	✓				✓	✓	✓	✓
RAPIDUS 212 R Reactive Power Factor Controller	606014	✓			✓		✓			✓	✓	✓	✓	✓	✓	✓				✓	✓	✓	✓
RAPIDUS 218 R Reactive Power Factor Controller	606021				✓																		✓
RAPIDUS 231 R Reactive Power Factor Controller	606001	✓	✓		✓	✓	✓			✓	✓	✓	✓	✓	✓	✓				✓	✓	✓	✓
RAPIDUS 231 RE Reactive Power Factor Controller	606005	✓	✓		✓	✓	✓			✓	✓	✓	✓	✓	✓	✓				✓	✓	✓	✓
RAPIDUS 232 R Reactive Power Factor Controller	606002	✓	✓		✓		✓			✓	✓	✓	✓	✓	✓	✓				✓	✓	✓	✓
RAPIDUS 232 RE Reactive Power Factor Controller	606007	✓	✓		✓		✓			✓	✓	✓	✓	✓	✓	✓				✓	✓	✓	✓
CT3-AC Transducer	600100	✓		✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CT3-AC-24 Transducer	600102	✓		✓			✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CT3-AC-LP Transducer	600104	✓		✓			✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
VT3-AC Transducer	600101	✓		✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
VT3-AC-24 Transducer	600103	✓		✓			✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
VT3-AC-LP Transducer	600105	✓		✓			✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
VT3-ACDC-24 Transducer	600106	✓		✓			✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
ANC 8 (24 V AC/DC) Annunciator	604620									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 8 (48 V AC/DC) Annunciator	604621									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 8 (110 V AC/DC) Annunciator	604622									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 8 (220 V AC/DC) Annunciator	604623									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 16 (220V AC/DC, 24-50 VAC/DC p.s.) Annunciator	604653									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 16 (110V AC/DC, 24-50 VAC/DC p.s.) Annunciator	604652									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 16 (48V AC/DC, 24-50 VAC/DC p.s.) Annunciator	604651									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 16 (24V AC/DC, 24-50 VAC/DC p.s.) Annunciator	604650									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 24 (220V AC/DC, 24-50 VAC/DC p.s.) Annunciator	604668									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 24 (110V AC/DC, 24-50 VAC/DC p.s.) Annunciator	604667									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 24 (48V AC/DC, 24-50 VAC/DC p.s.) Annunciator	604666									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 24 (24V AC/DC, 24-50 VAC/DC p.s.) Annunciator	604665									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 32 (110V AC/DC, 24-50 VAC/DC p.s.) Annunciator	604677									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 32 (48V AC/DC, 24-50 VAC/DC p.s.) Annunciator	604676									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 32 (24V AC/DC, 24-50 VAC/DC p.s.) Annunciator	604675									✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 16 (220V AC/DC, 85-300 VAC/DC p.s.) Annunciator	604633	✓								✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 16 (110V AC/DC, 85-300 VAC/DC p.s.) Annunciator	604632	✓								✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 16 (48V AC/DC, 85-300 VAC/DC p.s.) Annunciator	604631	✓								✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 16 (24V AC/DC, 85-300 VAC/DC p.s.) Annunciator	604630	✓								✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 24 (220V AC/DC, 85-300 VAC/DC p.s.) Annunciator	604663	✓								✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 24 (110V AC/DC, 85-300 VAC/DC p.s.) Annunciator	604662	✓								✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 24 (48V AC/DC, 85-300 VAC/DC p.s.) Annunciator	604661	✓								✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 24 (24V AC/DC, 85-300 VAC/DC p.s.) Annunciator	604660	✓								✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 32 (110V AC/DC, 85-300 VAC/DC p.s.) Annunciator	604672	✓								✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 32 (48V AC/DC, 85-300 VAC/DC p.s.) Annunciator	604671	✓								✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
ANC 32 (24V AC/DC, 85-300 VAC/DC p.s.) Annunciator	604670	✓								✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	

Product Description	Product Code	LVD		EMC <sup>2</sup>												R&TTE		RoHS			
		EN 61010-1	EN 61326-1	EN 61000-3-2	EN 61000-3-3	EN 61000-4-2	EN 61000-4-3	EN 61000-4-4	EN 61000-4-5	EN 61000-4-6	EN 61000-4-8	EN 61000-4-11	EN 55011	EN 55022	EN 55024	CISPR 11/R.E	CISPR 11/C.E		EN 301489-1	EN 301489-17	EN 50581
ETOR 2 Ethernet gateway	601401													✓	✓						✓
ETOR 4 Ethernet gateway	601400													✓	✓						✓
GTOR-4	601440		✓			✓	✓	✓	✓	✓	✓	✓	✓				✓	✓			✓
GTOR-4 (with PS)	601441		✓			✓	✓	✓	✓	✓	✓	✓	✓				✓	✓			✓
WTOR-4	601450		✓			✓	✓	✓	✓	✓	✓	✓	✓				✓	✓	✓	✓	✓
WTOR-4 (with UPS)	601451		✓			✓	✓	✓	✓	✓	✓	✓	✓				✓	✓	✓	✓	✓
DWT-3T	270501	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	✓			✓
DWT-3	270500	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	✓			✓
DPR 3120 E	270605	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	✓			✓
DPR 3110 E	270604	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	✓			✓
DPR 3120	270601	✓	✓			✓	✓	✓		✓	✓	✓	✓				✓	✓			✓
DPR 3121	270603	✓	✓			✓	✓	✓		✓	✓	✓	✓				✓	✓			✓
DPR 3111	270602	✓	✓			✓	✓	✓		✓	✓	✓	✓				✓	✓			✓
DPR 3110	270600	✓	✓			✓	✓	✓		✓	✓	✓	✓				✓	✓			✓
MEASTRO 321	270704	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	✓			✓
MEASTRO 221	270703	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	✓			✓
MEASTRO 121	270702	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	✓			✓
MEASTRO 120	270701	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	✓			✓
MEASTRO 110	270700	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	✓			✓

The logo for Klemsan, featuring the word "Klemsan" in a bold, white, sans-serif font with a registered trademark symbol (®) to the upper right. The text is set against a solid orange rectangular background. This orange background is part of a larger graphic element that includes a dark grey trapezoidal shape on the left side, creating a modern, angular design.

## Important Notice:

---

- Klemsan Inc. reserves the rights for any changes in this catalogue
- For the products that are not included in our catalogue please contact with our Trade Department.
- Figures and technical specs in this catalogue are only for general purpose.
- Our products are assembled to be in accordance with EC technical regulations and correspond to the national and international standards. All our products are fabricated in our ISO 9001, ISO 14001 and ISO 50001 certified manufacturing plants.
- For further information on the certificates:

**Tel** : +90 (232) 877 08 00  
**Fax** : +90 (232) 877 08 06  
**Mail** : info@klemsan.com.tr



## Head Office

Kızılızüm Cad. No:15  
Kemalpaşa / İzmir / TURKEY  
Tel : +90 232 877 08 00  
Fax : +90 232 877 08 06

## International Sales Office

Kızılızüm Cad. No:15  
Kemalpaşa / İzmir / TURKEY  
Tel : +90 232 877 08 00  
Fax : +90 232 877 08 06

## Domestic Sales Office

Ahi Evran Cad. No:9 Kat:4  
Maslak / İstanbul / TURKEY  
Tel : +90 212 222 52 00  
Fax : +90 212 222 66 55

## OVERSEAS OFFICES



### Europe

Gsm : +48 51 666 51 41  
Mail : ayhankanal@klemsan.com.tr



### Russian Federation

PJSC KLEMSAN 127566, 44, Altufevskoe  
shosse, Moscow, Russian Federation  
Tel : +7 495 720 67 71  
Mail : russia@klemsan.ru



### Africa & Middle East

Tel : +90 530 401 94 62  
Mail : aliabostiet@klemsan.com.tr



### GCC & India & Pakistan

Gsm : +90 537 870 11 55  
Mail : baranozturk@klemsan.com.tr



### Apac & Oceania

Gsm : +6698 2495282  
Mail : rabhasiithchatriposayanon@klemsan.com.tr



### Ukraine

6-8A, Yaroslava Ivashkevicha str. Office 7-8,  
04074, Kiev, UKRAINE  
Tel : +380 637 217 185  
Mail : tatanarozhko@klemsan.com.tr



### Colombia (LATAM)

Gsm : +1 925 315 71 76  
Mail : andresastudillo@klemsan.com.tr

### Mexico

Gsm : +52 55 1200 01 54  
Mail : kellymartinez@klemsan.com.tr



### Usa, Canada

Gsm : + 90 538 843 74 51  
Mail : baranozturk@klemsan.com.tr



### China

Gsm : +90 535 018 49 67  
Mail : egecansahin@klemsan.com.tr

